




Safety Technology International, Inc.
 2306 Airport Road • Waterford, Michigan 48327-1209
 Phone: 248-673-9898 • Fax: 248-673-1246
 Toll Free: 800-888-4784 • E-mail: info@sti-usa.com
 Web: www.sti-usa.com

Safety Technology International (Europe) Ltd.
 Unit 49G Pipers Road • Park Farm Industrial Estate • Redditch
 Worcestershire • B98 0HU • England
 Tel: 44 (0) 1527 520 999 • Fax: 44 (0) 1527 501 999
 E-mail: info@sti-europe.com • Web: www.sti-europe.com

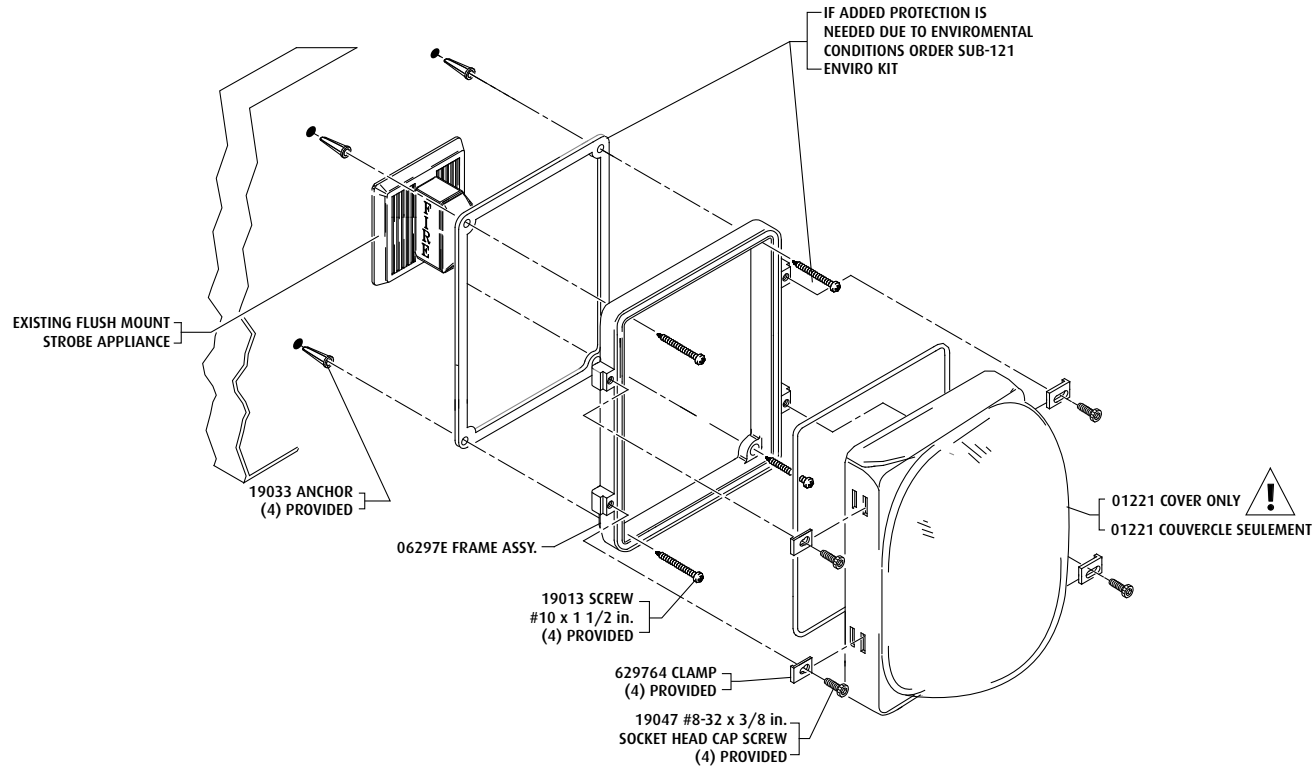

INSTALLATION NOTES

1. To minimize strobe light loss, regardless of the type of strobe appliance used, center cover over the strobe light lens. Failure to follow these instructions may lead to light loss transmission.
2. Damage Stopper must be installed to comply with applicable NEC, NFPA and local codes.
3. In applications where wash downs, rainfall or condensation occur, it is recommended that a drain or weep hole be provided. Refer to weep hole installation diagram.
4. Damage Stopper may be installed outdoors when appliance carries an outdoor rating.

REMARQUES SUR L'INSTALLATION


1. Afin de minimiser la perte de lumière stroboscopique, quel que soit le type de stroboscope utilisé, le couvercle doit être centré sur l'objectif stroboscopique. Le fait d'omettre ces instructions risque d'entraîner la perte de diffusion de la lumière.
2. Le Stopper de dégâts doit être installé de sorte à être conforme avec les normes NEC, NFPA applicables et les codes locaux.
3. Dans les applications où des jets d'eau, des précipitations ou de la condensation se produisent, il est recommandé de prévoir un trou de vidange ou une barbacane. Reportez-vous à schéma d'installation d'une barbacane.
4. Il est possible d'installer un Stopper de dégâts à l'extérieur lorsque l'appareil est homologué pour utilisation à l'extérieur.

INSTALLATION INSTRUCTIONS - REFER TO EXPLODED VIEW


1. Using back box assembly as a template, place against mounting surface at proper location according to NFPA 72.
2. Mark and drill (4) holes 1/4 in. (6.3mm) diameter, 1 in. (25mm) deep.
3. Insert the (4) anchors into the wall.
4. Mount frame assembly to wall with screws.
5. Install electrical fittings as needed.
6. Install strobe appliance (except for retrofit applications).
7. Install cover with clips and screws.
8. Test appliance according to appliance manufacturer's instructions.

CLEANING INSTRUCTIONS


Rinse with water to remove abrasive dust and dirt. Wash with soap or mild detergent, using a soft cloth (do not scrub). Rinse once more then dry with a soft cloth or chamois. To remove grease or wet paint, rub gently with a cloth wetted with naphtha. Then wash and rinse. DO NOT USE RAZOR BLADES.



INSTALL CLAMP IN NOTCH 2 AS SHOWN

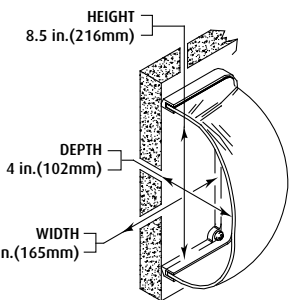

INTERNAL DIMENSIONS

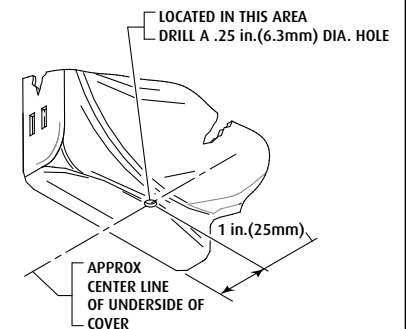

WEEP HOLE INSTALLATION

Electronic warranty form at www.sti-usa.com/wc14

INSTALLATION OF STI-1221E STROBE DAMAGE STOPPER®

All specifications and information shown were current as of publication and are subject to change without notice.

1221EIS APRIL2006



UL INSTALLATION REQUIREMENTS STI-1210 / STI-1221 SERIES

CAUTION

- This enclosure is rated to protect signaling appliances indoors and in areas of indirect weather exposure. The cover may be used outdoors only with devices also suitable for outdoor use.
- When covering fire-signaling appliances with this enclosure, some light and sound loss occurs. Please follow these guidelines listed during installation.
- Voice speaker appliance: No spacing adjustment is required for 0.5W, 1.0W and 2.0W appliances.
- Refer to the appliance manufacturer's candela rating. Multiply this number by the light loss value from the chart below to determine the new candela rating. Use this number and refer to the notification layout table of NFPA 72 for proper device locations.
- The use of this cover on audible devices decreases the sound output by 6dB(A). Actual sound level output should be checked after installation to determine if adequate sound levels exist. Refer to the notification layout table of NFPA 72 for proper device locations.

Attention

- Ce boîtier est homologué pour protéger les appareils de signalisation d'incendie à l'intérieur et dans les zones d'exposition indirecte aux intempéries. Le couvercle ne peut être utilisé à l'extérieur qu'avec les appareils appropriés pour une utilisation à l'extérieur aussi.
- Le fait de couvrir les appareils de signalisation d'incendie au moyen de ce boîtier risque d'entraîner une certaine perte lumineuse et sonore. Veuillez vous conformer à ces directives lors de l'installation.
- Haut-parleur: Aucun ajustement de distance n'est nécessaire pour les appareils à tension de 0,5 W, 1,0 W et 2,0 W.
- Reportez-vous à la cote candéla du fabricant de l'appareil. Multipliez cette valeur par la valeur de la perte de lumière du tableau ci-dessous pour déterminer la nouvelle cote candéla. Utilisez cette nouvelle valeur et reportez-vous au tableau de disposition des alertes de la norme NFPA 72 pour les emplacements appropriés de l'appareil.
- L'utilisation de ce couvercle sur les dispositifs sonores diminue la puissance sonore de 6 dB(A). Le niveau réel de la sortie sonore doit être vérifié après l'installation pour déterminer le maintien de niveaux sonores adéquats. Reportez-vous au tableau de disposition des alertes de la norme NFPA 72 pour les emplacements appropriés de l'appareil.

Performance Review - LIGHT DERATING FACTOR

MANUFACTURER	SERIES	STI-1210	STI-1221/1221A4X
ADT SECURITY	ADTG1-V SERIES	40%	34%
AMSECO	SL24W-153075	22%	37%
AMSECO – COLORED LENSES	SL24W-153075 A, B, G, OR R	47%	26%
AMSECO – COLORED LENSES	SL24C-3075110 A, B, G, OR R	47%	26%
AMSECO – COLORED LENSES	CSL24W-A, B, G, OR R	47%	26%
AMSECO – COLORED LENSES	CSL24C-A, B, G, OR R	47%	26%
DETECTION SYSTEMS	GES24 SERIES	-	31%
DETECTION SYSTEMS	GES24-15/75	-	-
EST / EDWARDS	2440S SERIES	43%	45%
EST / EDWARDS	202 SERIES	43%	45%
EST / EDWARDS	G1-V SERIES	40%	34%
EST / EDWARDS	G1-HV SERIES	40%	34%
EST / EDWARDS	G1-HOV SERIES	40%	34%
EST / EDWARDS	EG1-V SERIES	40%	34%
EST / EDWARDS	EG1-HV SERIES	40%	34%
EST / EDWARDS	EG1-HOV SERIES	40%	34%
FARADAY LLC	2700	-	57%
GENTEX	GES24 SERIES	-	31%
GENTEX	GES24-15/75	-	-
HARRINGTON SIGNAL	GES24 SERIES	-	31%
HARRINGTON SIGNAL	GES24-15/75	-	-
HONEYWELL	XLSG1-V SERIES	43%	45%

MANUFACTURER	SERIES	STI-1210	STI-1221/1221A4X
HONEYWELL	XLS202 SERIES	40%	34%
HONEYWELL	XLSG1-HV SERIES	40%	34%
HONEYWELL	XLSG1-HOV SERIES	40%	34%
MIRCOM	FS-240	47%	26%
MIRCOM	MS SERIES	43%	45%
MIRCOM	MG1-V SERIES	40%	34%
MIRCOM	MG1-HV SERIES	40%	34%
MIRCOM	MG1-HOV SERIES	40%	34%
MIRTONE	MG1-V SERIES	43%	45%
NATIONAL TIME & SIGNAL	GES24 SERIES	-	31%
NATIONAL TIME & SIGNAL	GES24-15/75	-	-
POTTER ELECTRIC	AS-24-153075R	47%	26%
POTTER ELECTRIC	AS-24-153075W	47%	26%
SECUTRON	GES24 SERIES	-	31%
SECUTRON	GES24-15/75	-	-
SIEMENS	202- SERIES	43%	45%
SIEMENS	G1-V SERIES	40%	34%
SIEMENS	U-MCS SERIES	-	-
SYSTEM SENSOR	SS24110ADA	46%	37%
SYSTEM SENSOR	P2, PC2, P4, PC4, SX, SC	53%	61%
WHEELLOCK	RSS-24MCW	-	-
ZITON PTY LTD	ZG1-V SERIES	40%	34%

STI-1210 Series Sound Derating Factor: System Sensor P2, PC2, P4, PC4, SX, SC series models: 6.7 dBA, General: 6 dBA

STI Generic Light Loss Value: STI-1210 Series: 53%; STI-1221 Series: 61%