



Product Data Sheet

1038T-N

Low-profile surface mount contact with angled terminals

Designer styled with screw terminals

The Sentrol surface mount magnetic contact is ideal for residential and commercial applications where terminal connects are preferred. The unit features Sems style terminals that have self-lifting washers and captured screws to prevent the screw from backing out. The screw have combination heads that accept either Phillips or flat blade drivers.

Easy installation

The terminals are angled away from the mounting surface to allow for quick and easy installation.

Durability and dependability

The Sentrol high performance magnetic contacts have been designed to facilitate installation and ensure durability and dependability. Most are conservatively rated at 10,000,000 cycles, guaranteeing a long life. Every reed connection is hand soldered and each magnetic contact is tested before they leave the factory, 100% of the time.

High quality components and materials

Reed legs are plated with rhodium or ruthenium, and hermetically sealed in dry nitrogen. This offers superior protection against sticking and provides a moisture free environment therefore preventing corrosion.



Standard Features


- Angled terminal blocks for easy installation
- 25 mm gap distance
- Tape or screw fixing
- Low profile design

1038T-N

Low-profile surface mount contact with angled terminals

Specifications

Gap distance (max)	25 mm
Connections	Angled screw terminals
Contact	NC
Supervised loop	No
Dimensions (L x W x H)	57 x 9,5 x 10 mm
Color	White

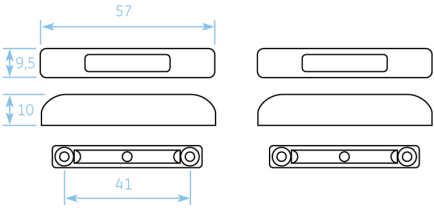

Ordering Information

Part No.	Description
1038T-N	Low-profile surface mount contact with angled terminals, white