



# ***Rack Mount Series***

## ***UL Listed CCTV Power Supplies***

### ***Installation Guide***

#### ***Models Include:***

- ***R2432300UL***
  - 24VAC @ 12.5 amp (300VA)  
or 28VAC @ 10 amp (280VA).
  - Thirty-two (32) *Fuse Protected Outputs.*
  
- ***R2432600UL***
  - 24VAC @ 25 amp (600VA)  
or 28VAC @ 20 amp (560VA).
  - Thirty-two (32) *Fuse Protected Outputs.*
  
- ***R2432300ULCB***
  - 24VAC @ 12.5 amp (300VA)  
or 28VAC @ 10 amp (280VA).
  - Thirty-two (32) *PTC Protected Outputs.*
  
- ***R2432600ULCB***
  - 24VAC @ 25 amp (600VA)  
or 28VAC @ 20 amp (560VA).
  - Thirty-two (32) *PTC Protected Outputs.*



## Overview:

These Altronix Rack Mount CCTV Power Supplies provide 24VAC or 28VAC distributed via thirty-two (32) fuse or PTC protected outputs for powering CCTV Cameras, heaters and other video accessories.

## Thirty-two (32) Output Rack Mount Configuration Reference Chart:

Altronix Model Number	Output Voltage (VAC)	Total Output Current (Power)	Number of Outputs	PTC Protected Outputs (Class 2 power-limited for Dry locations). (Class 3 for Wet locations).	Fuse Protected Class 1 Outputs	Individual Output Current (max per output not to exceed total output current)	Fuse Ratings	115VAC 50/60Hz Input Current	Agency Listings
<b>R2432300UL</b>	24VAC	12.5 amp	32		Yes	3.5 amp	3.5 amp	3 amp	
	28VAC	10 amp							
<b>R2432300ULCB</b>	24VAC	12.5 amp	32	Yes		2.5 amp		3 amp	
	28VAC	10 amp							
<b>R2432600UL*</b>	24VAC	25 amp	32		Yes	3.5 amp	3.5 amp	6 amp	
	28VAC	20 amp							
<b>R2432600ULCB*</b>	24VAC	25 amp	32	Yes		2.5 amp		6 amp	
	28VAC	20 amp							

\*24VAC models: Outputs 1-16 provide 12.5 amp (300VA) max. Outputs 17-32 provide 12.5 amp (300VA) max.

\*28VAC models: Outputs 1-16 provide 10 amp (280VA) max. Outputs 17-32 provide 10 amp (280VA) max.

## Specifications:

### Features:

- Thirty-two (32) individual power LED indicators.
- Illuminated master power disconnect circuit breaker with manual reset.
- 3-wire grounded line cord.
- Removable terminal blocks with locking screw flange.
- Spare fuses provided.

### Mechanical:

- 2U rack mount chassis for use in a standard EIA 19" rack.
- Enclosure Dimensions (H x W x D approx.): 3.26" x 19.125" x 8.5" (83mm x 486mm x 216mm)

## Installation Instructions:

1. The unit is factory set for 24VAC operation. For 28VAC operation, adjust unit prior to mounting and applying power as follows:
  - a. Open bottom of the unit by removing six (6) screws (*Rack Mechanical Drawing & Dimensions*, pg. 4).
  - b. Change the wire position so that the black wire [28V] is connected to the terminal marked [P] and the yellow wire [24V] is connected to the terminal marked [S] (*Fig. 1d*, pg. 3).
  - c. After securing all wires for proper voltage place bottom panel back on the unit and fasten with the six (6) screws.
2. Mount unit in the desired rack location (Space unit at least 3" from any video monitors). Do not obstruct side air vents.
3. Set power disconnect circuit breaker to the OFF position (*Fig. 1c*, pg. 3).
4. Plug power cord into a grounded 115VAC 50/60 Hz receptacle (*Fig. 1b*, pg. 3), ground should be connected as indicated in (*Fig. 1e*, pg. 3).
5. Set power disconnect circuit breaker to the RESET (ON) position and measure output voltage before connecting devices (*Fig. 1c*, pg. 3). This helps avoiding potential damage. All terminals with common suffix (P) "1P, 2P..." are the same polarity.
6. Set power disconnect circuit breaker to the OFF position (*Fig. 1c*, pg. 3).
7. Connect devices to the removable terminal blocks marked [1P & 1N through 8P & 8N] (*Fig. 1a*, pg. 3). When wiring is completed on the terminal blocks, they can be locked down by tightening screw flanges.

Fig. 1

Fig. 1a

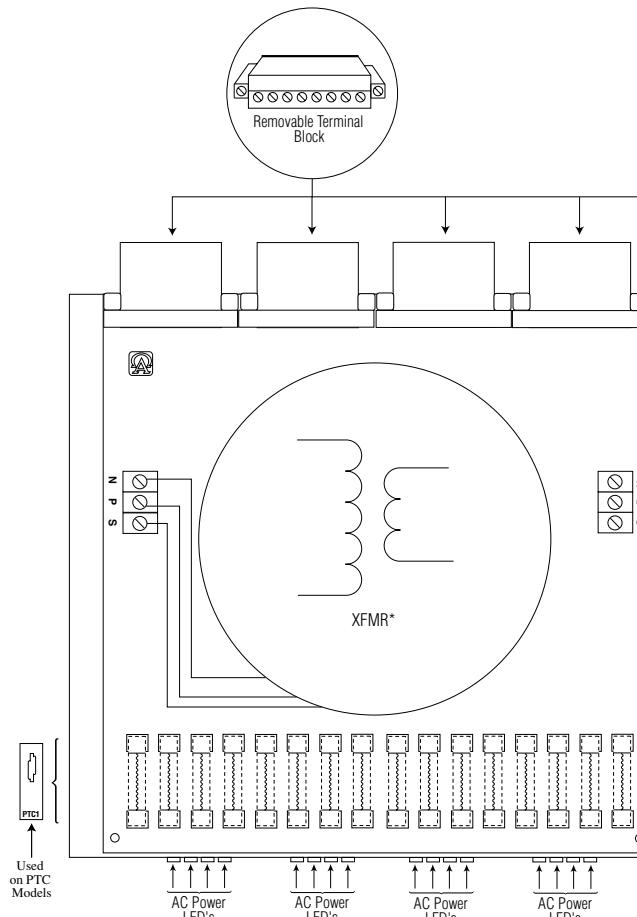


Fig. 1b

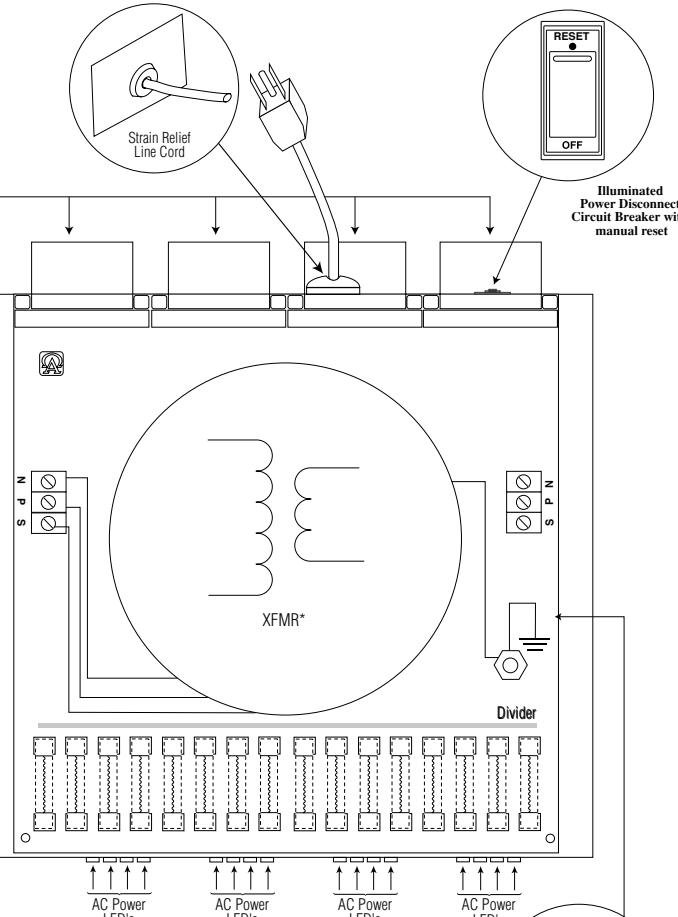


Fig. 1c

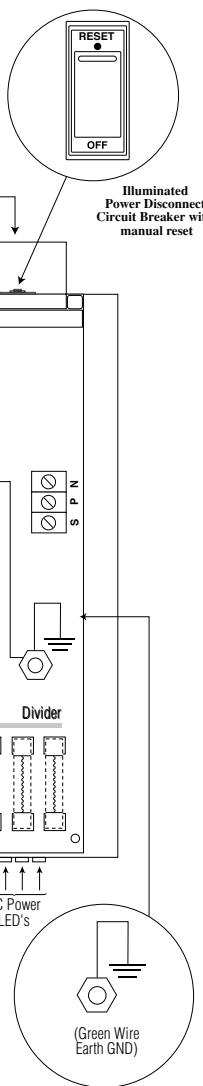


Fig. 1d





Fig. 1e



8. Upon completion of the wiring, set power disconnect circuit breaker to the RESET (ON) position (Fig. 1c, pg. 3).
9. Green power LEDs on faceplate will illuminate when AC power is present. When an output is in a trouble condition (blown fuse or tripped PTC) the corresponding LED will not be illuminated (Fig. 1, pg. 3):
  - a. Blown fuse (R2432300UL & R2432600UL) - Set power switch on the back of the unit to the OFF position (Fig. 1c, pg. 3). Remove faceplate to access fuses. Replace with fuses rated @ 3.5A/250VA (Altronix model # Fuse1).
  - b. Tripped PTC (R2432300ULCB & R2432600ULCB) - To reset PTC, set power switch on the back of the unit to the OFF position. After approximately 30 sec. set power switch to the ON (RESET) position (Fig. 1c, pg. 3).
10. Power switch with built-in circuit breaker:
  - OFF position - Switch not illuminated. Outputs not powered.
  - RESET (ON) position - Switch illuminated. Outputs powered.

Circuit breaker tripped - Switch not illuminated. Power LEDs on faceplate are not illuminated. Outputs not powered. To reset circuit breaker set power switch to the ON (RESET) position (Fig. 1c, pg. 3).

**Note:** Do not exceed unit's electrical load ratings as indicated in reference chart (pg. 2).

Do not place mechanical load on the unit.

Unit is designed optimally for normal data room office installations. Data racks should always be properly ventilated.

**CAUTION:** Equipment to be installed/serviced by authorized personnel only.  
Shut branch circuit power before servicing/installing equipment.

**WARNING:** To reduce the risk of fire or electric shock, do not expose the unit to rain or moisture. This installation should be made by qualified service personnel and should conform to all local codes and in accordance with the National Electrical Code.



**For fuse protected models:**

Replace fuses with the same type and rating 3.5A/250V.



The lightning flash with arrow head symbol within an equilateral triangle is intended to alert the user to the presence of an insulated DANGEROUS VOLTAGE within the product's enclosure that may be of sufficient magnitude to constitute an electric shock.



The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the appliance.






**CAUTION**  
RISK OF ELECTRIC SHOCK  
DO NOT OPEN



**CAUTION:** To reduce the risk of electric shock do not open enclosure. There are no user serviceable parts inside. Refer servicing to qualified service personnel.

**Rack Mechanical Drawing & Dimensions (H x W x D):**

3.26" x 19.125" x 8.5" (83mm x 486mm x 216mm)

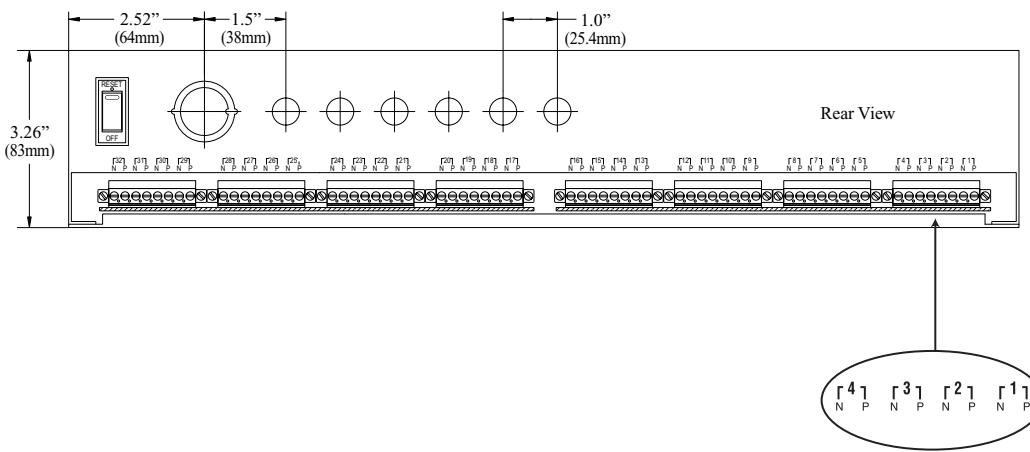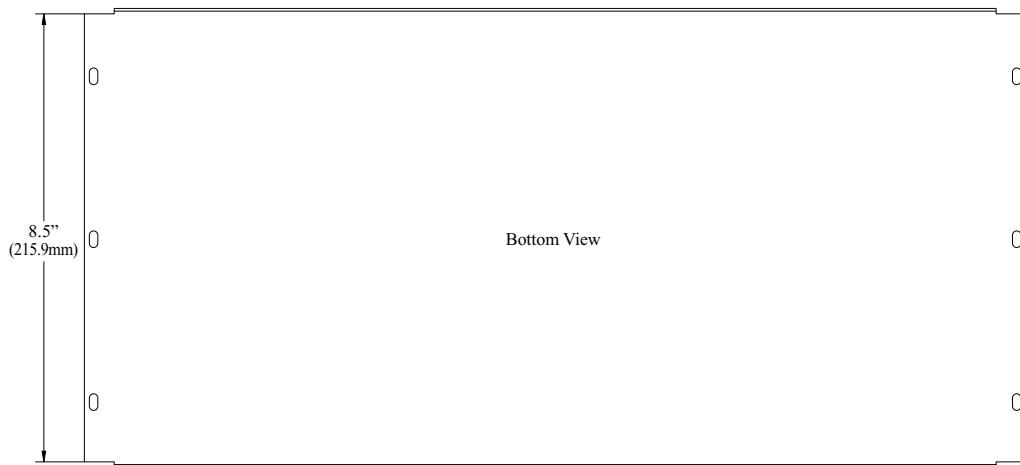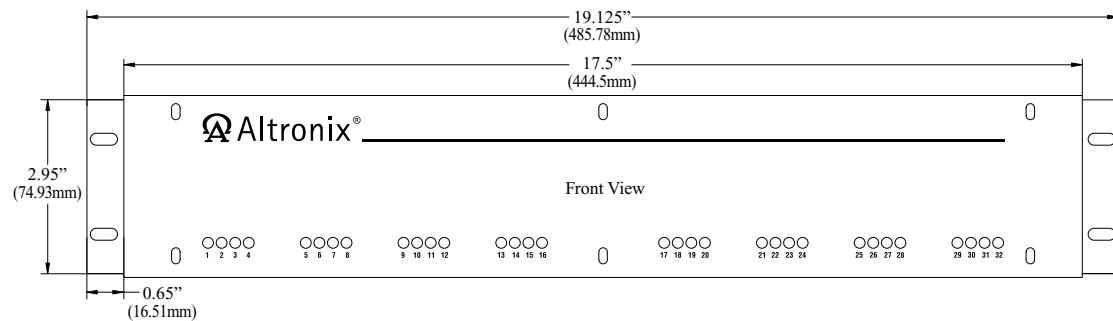

Altronix is not responsible for any typographical errors.

Altronix Corp. 140 58th Street, Brooklyn, New York 11220 USA, 718-567-8181, fax: 718-567-9056  
web site: [www.altronix.com](http://www.altronix.com), e-mail: [info@altronix.com](mailto:info@altronix.com), Lifetime Warranty, Made in U.S.A.

IIR2432ULSeries  
- 4 -

J08M

