



## CX-1085 PNEUMATIC TIMERS

### FEATURES

- MAY BE ORDERED SEPARATELY OR ASSEMBLED WITH CAMDEN KEY SWITCHES OR PUSH BUTTONS
- ADJUSTABLE 1 TO 60 SECOND TIME DELAY
- DPST (FORM Z) CONTACTS
- 5 AMPS @ 24V DC CONTACTS
- HEAVY-DUTY CONSTRUCTION FOR LONG SERVICE LIFE

### DESCRIPTION

**CAMDEN DOOR CONTROLS CX-1085** pneumatic time delays require no power to operate. The timing range is 1 – 60 seconds, and is easily adjusted by a thumbscrew.

**Camden CX-1085 Pneumatic Timer** is integrated into the CM-1285, 2285, 3285/3585 and CM-1185/2085 Key Switches.



CX-1085  
(MOUNTED TO  
KEY SWITCH)

### APPLICATION

Camden pneumatic timers are ideal for use to de-activate magnetic locks where building codes mandate a non-electronic means of egress, or where power is not available for a conventional timer.

ELECTRIC STRIKES

MAGNETIC LOCKS

RELAYS &amp; TIMERS

TRANSFORMERS &amp; POWER SUPPLIES

PNEUMATIC TIMERS




SPECIFICATIONS

CX-1085 & CX-1085M


OPERATING FORCE	MAXIMUM 8 OZ.
SWITCH RATING	5 AMPS @ 24V DC
TIME RANGE	1 - 60 SEC. + - 15%
TEMPERATURE RANGE	15° TO 120 ° F (-9° TO 49° C)
REPEAT ACCURACY	+ - 10%
TIMER LIFE	1,000,000 OPERATIONS

ORDERING INFORMATION

MODEL	DESCRIPTION
CX-1085	PNEUMATIC TIMER FOR KEY SWITCHES

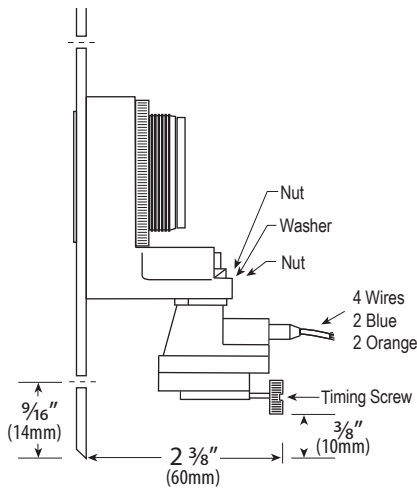

CX-1085  
SIDE VIEW  
(SHOWN WITH KEY SWITCH)



CX-1085  
FRONT VIEW