



Product Data Sheet

1125W-N

"Stubby" press-fit recessed mount magnetic contact

Stubby "Press-Fit" contact

The Sentrol 1125 series "Stubby" Press-Fit magnetic contacts are a 9 mm switch designed specifically for applications where space is limited. The short length makes it ideal for thin-framed windows and doors where longer units cannot be used. Press fit ribs on the housing make for quick, easy installation.

Easy installation

Switch is hermetically sealed reed switch, which is potted using exclusive polyurethane potting compound into the switch housing. Switch and Alnico V magnet is drill-mounted in wood or aluminum with a suitable adhesive. The switch and magnet housing have three fins to press-fit against the mounting hole.

Durability and dependability

The Sentrol high performance magnetic contacts have been designed to facilitate installation and ensure durability and dependability. Most are conservatively rated at 10,000,000 cycles, guaranteeing a long life. Every reed connection is hand soldered and each magnetic contact is tested before they leave the factory, 100% of the time.

High quality components and materials

Reed legs are plated with rhodium or ruthenium, and hermetically sealed in dry nitrogen. This offers superior protection against sticking and provides a moisture free environment therefore preventing corrosion.



Standard Features


- Quick and easy to install
- Unobtrusive and attractive design

1125W-N

"Stubby" press-fit recessed mount magnetic contact

Specifications

Gap distance (max)	19 mm
Connections	30 cm wire leads
Contact	NC
Supervised loop	No
Dimensions (Ø x L)	
Contact	Ø 9 x 19 mm
Magnet	Ø 9 x 19 mm
Color	White
Remarks	

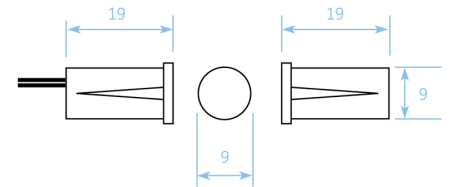

Ordering Information

Part No.	Description
1125W-N	"Stubby" press-fit recessed mount magnetic contact, wide gap, white

