

## Indoor Stand-Alone Keypad

**SK-1011-SQ 100 Users, One Relay**

### Features:

- ▶ 100 Users.
- ▶ 1 Output: Form C relay, 5A@28VDC.
- ▶ 100 Unique 4~8 digit codes.
- ▶ 10,000 Possible user code combinations.
- ▶ Durable and attractive stainless-steel face.
- ▶ Easily delete individual codes.
- ▶ Programmable lockout or duress output after 5~10 unsuccessful attempts to key in a code.
- ▶ Programmable output relay activation buzzer sounds while the output relay is activated.
- ▶ Relay output inhibit control.
- ▶ Egress input lets users exit the protected premises without keying in the code.
- ▶ Built-in tamper (N.C.) circuit.
- ▶ EEPROM memory prevents data loss.
- ▶ Power: 12~24 VAC/VDC.
- ▶ Auto or manual code entry checking:
  - Auto: **#** Key is not required after each code.
  - Manual: **#** Key must be pressed after every code.



Form C  
Relay  
Output

100  
User  
Codes


Stainless  
Steel  
Faceplate

12~24  
VAC/  
VDC

### Specifications:

Operating voltage	12~24 VAC/VDC	
Current draw	Stand-by	10mA@12VDC
	Key pressed	30mA@12VDC
	Relay active	80mA@12VDC
Number of relays	1	
Relay output	5A@28VDC, Form C, NO/NC/COM	
Tamper output	N.C. dry contact	
Egress input	N.O. ground	
Additional output	Keypad active and alarm output	
Egress	N.O. Ground, 3A@12VDC	
Dimensions	Keypad	4 <sup>5</sup> / <sub>8</sub> "x2 <sup>7</sup> / <sub>8</sub> "x1 <sup>3</sup> / <sub>4</sub> " (117x73x44 mm)
	PCB	2 <sup>3</sup> / <sub>4</sub> "x2"x3 <sup>3</sup> / <sub>4</sub> " (70x49x20 mm)
Weight	6.3-oz (180g)	

### Dimensions:

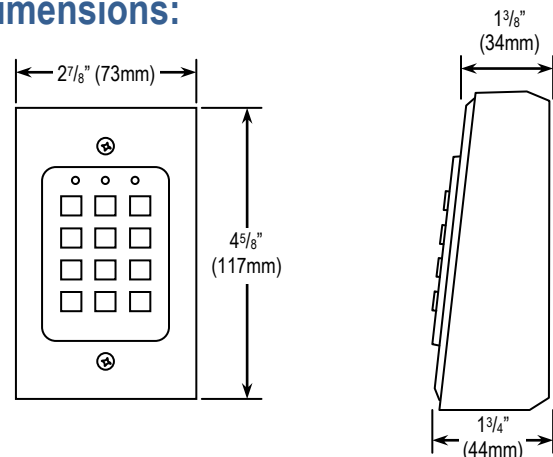

**SECO-LARM®**  
16842 Millikan Avenue  
Irvine, CA 92606

Tel: 1-949-261-2999  
1-800-662-0800  
Fax: 1-949-261-7326

Web: [www.seco-larm.com](http://www.seco-larm.com)  
Email: [info@seco-larm.com](mailto:info@seco-larm.com)




Copyright © 2010  
SECO-LARM U.S.A., Inc.  
All rights reserved

# Indoor Stand-Alone Keypad



## Sample Wiring:

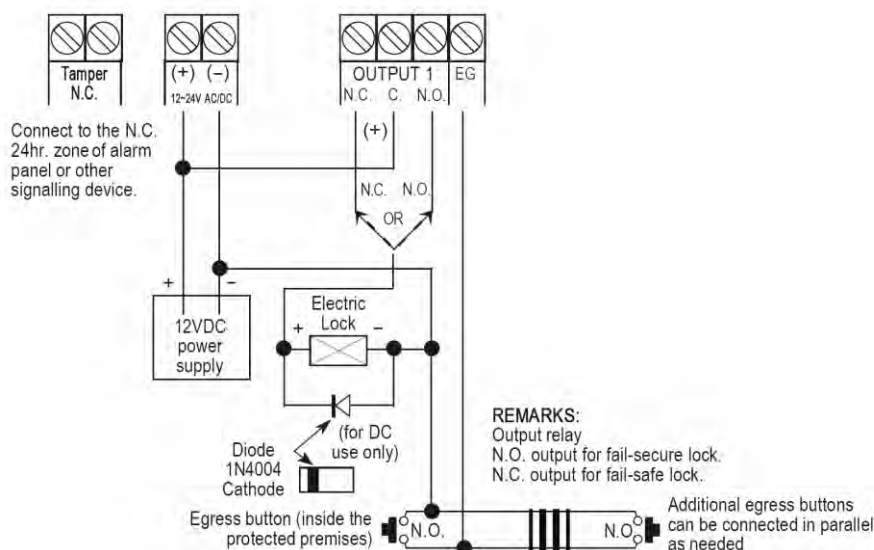

## Status Buzzer and LEDs:

### Red LED


Illuminates when the door lock input has been inhibited.

### Amber LED

Flashes to show the keypad status (see chart).

### Green LED

Illuminates when any output is activated.

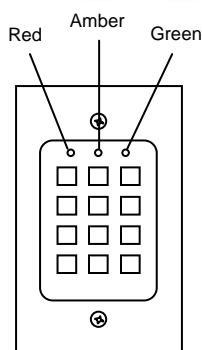

STATUS	BUZZER TONES	AMBER LED FLASHES
In programming mode	---	ON
Successful key entry	1 beep	1 flash
Successful code entry	2 beeps	2 flashes
Unsuccessful code entry	5 beeps	5 flashes
DAP jumper not replaced	Continuous beeps	Continuous flashes
In standby mode	---	1 flash in 2-second intervals
Output relay activated	1-second beep	---

## Also Available from SECO-LARM:

### SK-1123-SQ

Outdoor Stand-Alone Keypad

- ▶ Weatherproof
- ▶ 110 Users
- ▶ 2 Relays
- ▶ Surface mount



### SK-2323-SDQ

Mullion-Style Keypad

- ▶ Weatherproof
- ▶ 1,010 Users
- ▶ 2 Relays
- ▶ Prox-reader available



### SK-1323-SDQ

Sealed-Environment Keypad

- ▶ Weatherproof
- ▶ 1,010 Users
- ▶ 2 Relays
- ▶ Prox-reader available



### SK-1123-FQ

Indoor Stand-Alone Keypad

- ▶ Weatherproof
- ▶ 110 Users
- ▶ 2 Relays
- ▶ Flush mount



### SK-1131-SQ

Illuminated Indoor Keypad

- ▶ Backlit Keys
- ▶ 120 Users
- ▶ 2 Relays



### Proximity Cards or Tags

(Sold in packs of 10)



PR-K1S1-A

PR-K1K1-AQ

**SECO-LARM®**

16842 Millikan Avenue  
Irvine, CA 92606

Tel: 1-949-261-2999

1-800-662-0800

Fax: 1-949-261-7326

Web: [www.seco-larm.com](http://www.seco-larm.com)

Email: [info@seco-larm.com](mailto:info@seco-larm.com)



Copyright © 2010  
SECO-LARM U.S.A., Inc.  
All rights reserved