

RECESSED 3/8" RIBBED SWITCH SET

2120-12 Series





2120-12

PART NUMBERS				
	Closed Loop	Open Loop	SPDT	
Standard Gap 1/2"+	2120-12	2130-12	2140-12	
Wide Gap 1"+	2120-12WG	2130-12WG	2140-12WG	

GEORGE RISK INDUSTRIES, INC. GR.I. PLAZA KIMBALL, NE 69145



TOLL-FREE 1-800-445-5218 TOLL-FREE 1-800-523-1227 (308) 235-4645 FAX (308) 235-3561 E-MAIL: grisales@megavision.com WEB SITE: www.grisk.com




INSTALLATION APPLICATIONS:

The GRI 2120 Ribbed Switch, designed to complete a multi-task role, is a unique combination of special features and materials. The unusual ribbed outside diameter permits a secure mounting over a wide range of drilled hole sizes. The installer does not have to glue this recessed switch into a slightly oversized hole, as the flexible ribs conform as it is pressed into the wood. Self adjusting to fit the larger hole, the 2120 also centers itself to the coverage of the misdrilled hole.

Picked especially for the 2120 Ribbed Switches, a new material with enhanced memory properties allows the ribbed "O" rings to flex enough to fit an undersized hole but still maintain a firm holding force in an oversized hole. This mix of features yields an additional bonus in that it provides a high degree of protection from crushing, such as that encountered when wood swells or headers shift.

Finally, for installations utilizing an angled wire path away from the hole drilled for the switch barrel, the 2120 merely needs to be aligned with one flat side along the path drilled for the lead wire and press fit. The ribbed rings, not being continuous, simply adjust to the wire and allow for an easy and quick install.

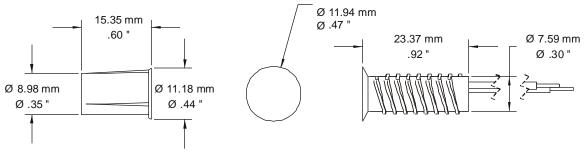

2120-12

GRI products meet or exceed these minimum general specifications:

PART NUMBER	LOOP TYPE	SWITCH ELECTRICAL CONFIG.	REED FORM	MAXIMUM INITIAL CONTACT RESISTANCE (Ω)	MAXIMUM CONTACT RATING (W)	MAXIMUM SWITCHING VOLTAGE (VDC)	MAXIMUM SWITCHING CURRENT (A)
2120-12	Closed	N/O	А	.150	10	200	.500
2120-12WG	Closed	N/O	А	.150	10	200	.400
2130-12	Open	N/C	В	.140	5	175VDC	.250
2130-12WG	Open	N/C	В	.140	5	175VDC	.250
2140-12	Open/Closed	SPDT	С	.140	5	175VDC	.250
2140-12WG	Open/Closed	SPDT	С	.140	5	175VDC	.250

WARRANTY:

Lifetime warranty against workmanship, material and factory defects.

Contact your GRI Distributor or call:

GEORGE RISK INDUSTRIES, INC. GR.I. PLAZA KIMBALL, NE 69145



TOLL-FREE 1-800-445-5218 TOLL-FREE 1-800-523-1227 (308) 235-4645 FAX (308) 235-3561 E-MAIL: grisales@megavision.com WEB SITE: www.grisk.com

BA-125 Rev. K 8/27/2010

N SERIES SWITCH SETS



- ◆ Rare Earth Magnets Paired With Press To Fit Contacts
- ◆ Solves Problem Installs ◆ Time Saving Installations
- ◆ Nickel Plated To Protect From Chipping And Corrosion
- ◆ Use MM-600 With A Standard Gap Switch To Attain Wide Gap



G.R.I.'s "Mighty Mag" contacts will assist in resolving the installer's problem of drilling into the new thinner vinyl windows. These rare earth magnets are less than 1/8" high and install fast and easily without worry about damage to the window itself. (Please see the Mighty Mag page in the accessories section of G.R.I.'s full line catalog for dimensions).

G.R.I.'s Mighty Magnets make use of a rare earth alloy which allows the size of the magnet to be significantly reduced while still retaining or improving the gap involved. These rare earth magnets can be mounted with the stainless steel mounting screws provided (MM-400 and MM-600) and/or double stick tape included in the bag, or may be glued into place.

Note: G.R.I. suggests using a silicone or clear nail polish sealant on the surface of installed rare earth magnets to prevent corrosion.

PART NUMBERS:			
N120T-12 N120T-12WG N150-12 N150-12WG N2020-12 N2020-12WG	N2020-T N2020-TWG N20RS-12 N20RS-12WG N20RS-T N20RS-TWG	N2120-12 N2120-12WG N4473 N4473WG N50R-12 N50R-12WG	N50RF-12 N50RF-12WG N50RS-12 N50RS-12WG N5065


Other possible combinations including Open Loop and S.P.D.T. available or as Switch Only and Magnet Only.





Pair Switch with Magnet to get the following gaps:

		MM-25				
Switch	Description	MMR-25	MM-375	MM-10	MM-400	MM-600
S120T-12	3/4" Press Fit/Leads		1"+	Up to 1"	Up to 3/4"	1"+
S150-12	1/2" Press Fit/Leads	1/2"+	1 1/2"+	Up to 1"	3/4"+	1 1/2"+
S2020-12	3/8" Press Fit/Leads	Up to 1/2"		Up to 1"	1"+	1"+
S2020-T	3/8" Press Fit/Terminals			Up to 1"	Up to 3/4"	1"+
S20RS-12	.3/8" Short Press Fit/Leads	Up to 3/8"		3/4"+	Up to 3/4"	Up to 1"
S20RS-T	3/8" Short Press Fit/Terminals		1"+	3/4"+	Up to 3/4"	Up to 1"
S2120-12	3/8" Ribbed Press Fit/Leads .	5/8"+	1"+	Up to 1"	Up to 3/4"	1"+
S4473	3/4" Press Fit/Terminals	Up to 1/2"	1 1/4"+	Up to 1"	Up to 3/4"	1"+
S50R-12	1/4" Press Fit/Leads	Up to 1/2"	Up to 1 1/2"	1"+	3/4"+	Up to 1 1/4"
S50RF-12	1/4" Press Fit/Flanged/Leads	Up to 1/2"	Up to 1 1/2"	1"+	Up to 3/4"	Up to 1 1/4"
S50RS-12	. 1/4" Short Press Fit/Leads	Up to 3/8"	1"+	3/4"+	Up to 1/2"	Up to 1 1/4"
S5065	3/8" Press Fit/Leads	1/2"+	1"+	1"+	Up to 1"	Up to 1 1/4"
Magnet orientat	ion will affect operation of	switch. Please	confirm operatio	on prior to in	stallation.	

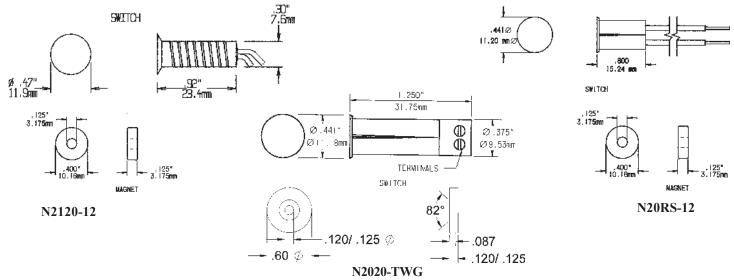

WARRANTY:

Lifetime warranty against workmanship, material and factory defects.

CONTACT YOUR G.R.I. DISTRIBUTOR OR CALL:

GEORGE RISK INDUSTRIES, INC. GR.I. PLAZA KIMBALL, NE 69145



TOLL-FREE 1-800-445-5218 TOLL-FREE 1-800-523-1227 (308) 235-4645 FAX (308) 235-3561 E-MAIL: grisales@megavision.com WEB SITE: www.grisk.com