


# LCN 2310ME SERIES

## FEATURES

### CONCEALED (IN FRAME) MOUNTING

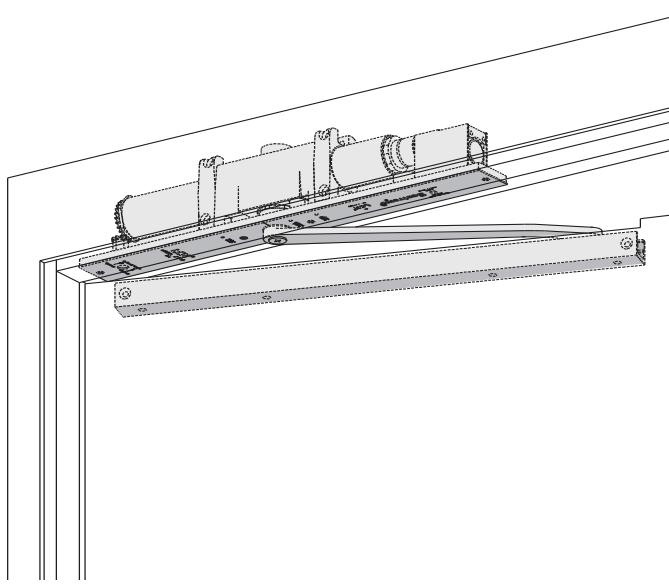

The 2310ME SENTRONIC® is a concealed heavy duty, electrically controlled closer/holder designed to provide infinitely adjustable hold-open for fire and smoke barrier doors. Door is held open until current interruption releases mechanism and the door closes. Single lever (track) arm closer is specifically designed for interior doors. Choice of finishes, cylinder functions, and installation accessories meet virtually all life safety requirements.

The 2310ME Series is UL & cUL listed for smoke barrier or labeled fire doors. Tested and certified under ANSI Standard A156.15. Conforms to life safety code, NFPA 101.

- Standard 2310ME series closer shipped with either 24V or 120V cylinder (please specify), two piece metal finish plate, standard arm, track, and wood and machine screw pack. See 2310ME Series page 25 for options.
- Sized cylinder for interior doors to 4'0".
- Functions as full rack and pinion door closer when hold-open is not engaged or current is interrupted.
- Handed for right or left swinging door.
- Built-in "On/Off" switch controls hold-open function.
- Interfaces with fire alarm systems. Consult factory.
- Standard or optional custom powder coated finish.
- Optional plated finish on arm, fasteners and finish plate.

MOUNTING	FINISH	COVER	CYLINDER	*ARM FUNCTION
HINGE (PULL) SIDE	POWDER COAT	HANDED	SINGLE POINT HOLD-OPEN	160°
TOP JAMB (PUSH)	PLATED	NON-SIZED	MULTI-POINT HOLD-OPEN	REGULAR (SINGLE)
STOP FACE (PUSH)	PLASTIC	SIZED	BYPASS 80/140	SWING FREE
CONCEALED (FRAME)	METAL			DOUBLE EGRESS
CONCEALED (DOOR)				

- Available
- Not available

\* Maximum hold-open with standard template. See individual closer series for degrees of opening and hold-open per installation.

# LCN 2310ME SERIES


## CONCEALED MOUNTING

For interior smoke barrier and labeled fire doors.

## MAXIMUM OPENING

Templating allows 180°.

Infinite hold-open points up to 160°.

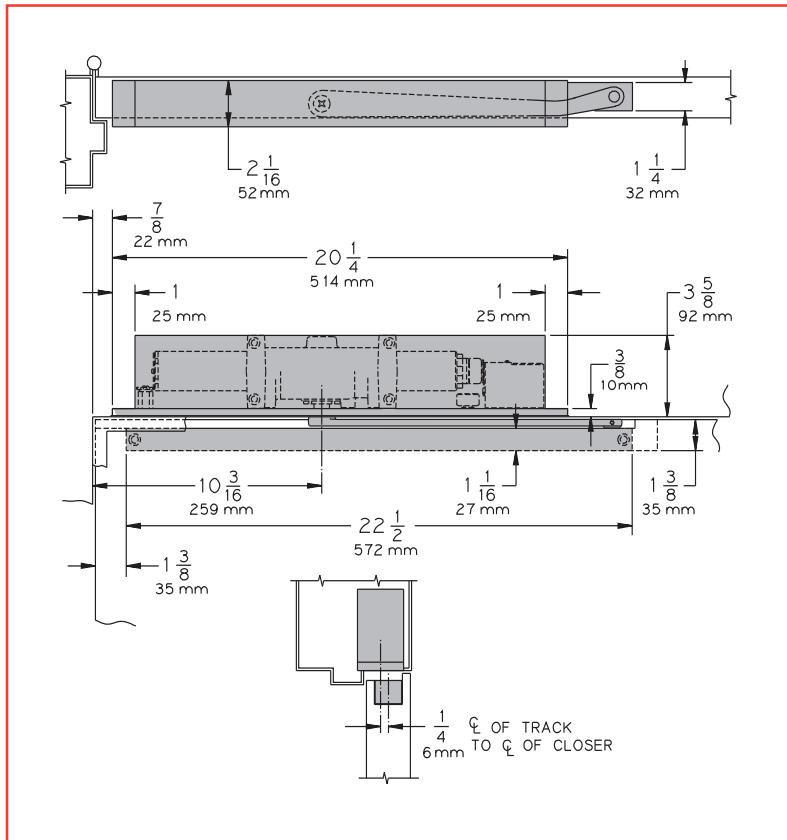


- ▶ **Butt Hinges** should not exceed 5" (127 mm) in width.
- ▶ **Top Rail** 1 3/8" (35 mm) mortise required.  
5/16" (8 mm) cutout required at top of door, stop face only.
- ▶ **Door Thickness** 1 3/4" (44 mm) minimum.
- ▶ **Door Width** 2'4" (711 mm) minimum.
- ▶ **Hollow Metal Frame** Requires minimum 4" (102 mm) x 4" frame. Consult factory or template for preparation details.
- ▶ **Bypass** (suffix "B80" or "B140") eliminates hold-open function up to a specified point of the doors swing.  
B80 cylinder from 0° to 80°.  
B140 cylinder from 0° to 140°.
- ▶ **Wiring Diagram**

### Options

- ▶ Hold-open bypass.
- ▶ 24V or 120 volt input, please specify.

### Special Templates

Customized installation templates or products may be available to solve unusual applications. Contact LCN for assistance.

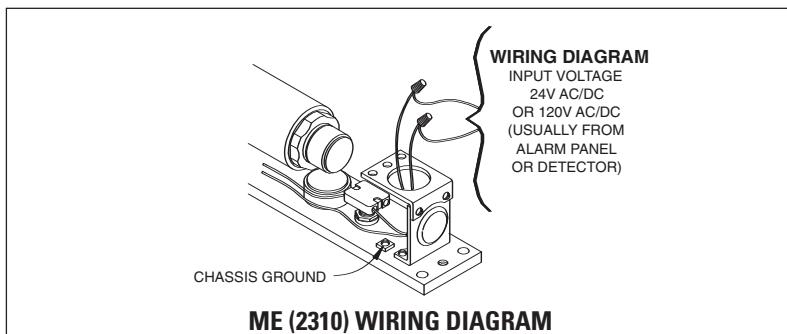


# LCN 2310ME SERIES

## CYLINDER


### ME CYLINDER, 2310ME-3971

Standard, handed cast iron cylinder assembly. 24V holding solenoid (24) or 120V holding solenoid (120), please specify.

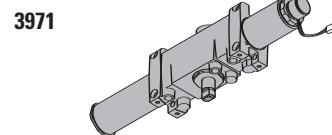

### ME CYLINDER, 2310ME-3071


Standard, handed cylinder and mounting plate assembly. "On/Off" switch assembly controls hold-open function. Circuitry accepts either AC or DC input. 24V holding solenoid (24) or 120V holding solenoid (120), please specify.

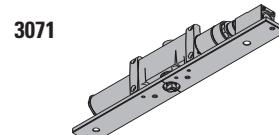

## ARM

### STANDARD ARM, 2310ME-3077T


Handed arm.

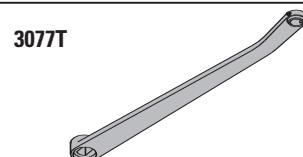

## TRACK

### STANDARD TRACK, 2310ME-3038


Standard, non-handed track.

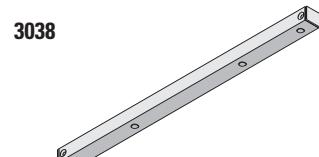

## SWITCH

### SWITCH, 2310ME-3351


"On/Off" switch assembly provides continuous hold-open function. Available as 24V or 120V, please specify.

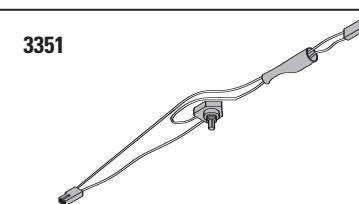

## INSTALLATION ACCESSORIES


### FIRE SHIELD, 2310ME-420

22 gauge steel liner mounts in the track mortise of the door's top rail for 20 minute labeled wood doors with hollow metal frames.

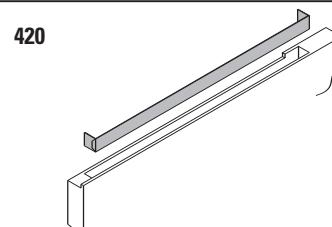

### TRANSFORMER, 4040SE-3210


Reduces line voltage from 120V to 24V AC. Mounted on plate for 4" (102 mm) x 4" x 2 1/8" (54 mm) junction box (by others).

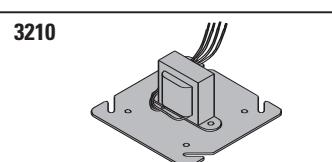

### TRACK ROLLER, 2310ME-3034

Quiet, low friction roller assembly.

Shoulder dimension "X" = 1/16" (2 mm).

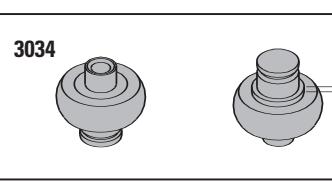

# LCN 2310ME SERIES

## TABLE OF SIZES

Closing power of 2314ME Series closers may be increased 15%.

→ Indicates recommended range of door width for closer size.

### INTERIOR DOOR WIDTH

28"	34"	38"	48"
711mm	864mm	965mm	1219mm

2314 → size 4

Minimum Door Width

## HOW-TO-ORDER 2310ME SERIES CLOSERS

### 1. SELECT CYLINDER SIZE.

2314ME

### 2. SPECIFY HAND.

RH

LH

### 3. VOLTAGE

24V AC/DC

120V AC/DC

### 4. SPECIFY FINISH.

Standard Powder Coat \_\_\_\_\_

Aluminum, Dark Bronze, Statuary,

Light Bronze, Black, Brass.

### Closer will be shipped with:

- FINISH PLATES,
  - STANDARD ARM,
  - STANDARD TRACK,
  - TRACK ROLLER,
  - WOOD & MACHINE SCREW PACK,
- unless options listed below are selected.

## CLOSER OPTIONS

### CYLINDER FUNCTION

Bypass 80° (B80)

Bypass 140° (B140)

### FINISH

Custom Powder Coat (RAL) \_\_\_\_\_

Plated Finish, US \_\_\_\_\_

### SCREW PACK

TORX Machine Screw (TORX)

### INSTALLATION ACCESSORIES

Fire Shield, 2310ME-420

Transformer, 4040SE-3210

### SPECIAL TEMPLATE

ST-\_\_\_\_\_