

310-4-x Series

The industrial grade, for surface vertical-rod exit devices

310-4-1

For both leaves of a pair of doors when spacing of the vertical rod is between 4" and 4-3/4"

PK keeper standard

310-4-2

For both leaves of a pair of doors when spacing of the vertical rods is between 4-5/8" and 5-3/8"

PK keeper standard

310-4-3

For both leaves of a pair of doors when spacing of the vertical rods is between 5-1/4" and 6"


PK keeper standard

310-4-30

For both leaves of a pair of doors when spacing of the vertical rods is between 2-5/8" and 3-3/8"

PK keeper standard

The 310-4-x vertical surface mounted series is designed for heavy duty applications on single or double doors. The all stainless steel construction of this device makes it ideal for high abuse applications. This line of electric strikes will accommodate rim exit devices with a swinging, pullman style latchbolt.

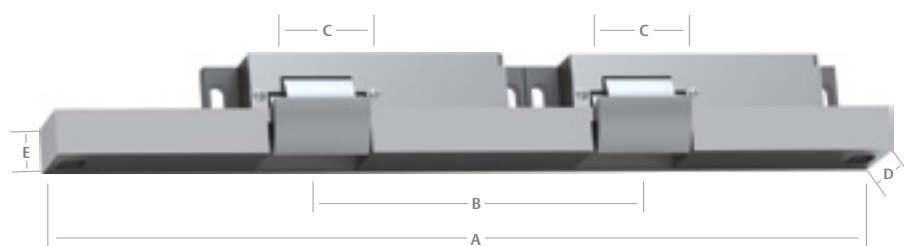

	A	B	C	D	E
310-4-1	13-3/8"	4-3/8"	1-13/16"	1-1/2"	3/4"
310-4-2	14	5"	1-13/16"	1-1/2"	3/4"
310-4-3	14-5/8"	5-5/8"	1-13/16"	1-1/2"	3/4"
310-4-30	12"	3"	1-13/16"	1-1/2"	3/4"

Specifications

- UL 1034, burglary-resistant listed
- UL 294 (6th Edition) listed
- ANSI/BHMA A156.31, Grade 1
- New York City accepted
- RoHS compliant

Electrical (continuous duty)

- .51 Amps at 12 VDC
- .25 Amps at 24 VDC

Standard Features

- Tamper-resistant, heavy duty construction
- Constructed entirely of stainless steel for strength and corrosion resistance
- Static strength 1,500 lbs.
- Dynamic strength 70 ft-lbs.
- Endurance 500,000 cycles
- Adjustable keeper to allow for door and frame misalignment
- Pullman keeper
- Non-handed
- Fail secure
- Plug-in connector
- Five-year limited warranty

Optional Features

- Fail safe

LCBMA » Latchbolt & Locking Cam Monitor with Auxiliary Switch

Accessories

2001-1 » Wire-in bridge rectifier

2001M » Plug-in bridge rectifier

2004M » ElectroLynx® adapter

2005M3 » SMART Pac® III

2006M » Plug-in buzzer

Finishes

630 » Satin stainless steel

605 » Bright brass

606 » Satin brass

612 » Satin bronze

613 » Bronze toned

629 » Bright stainless steel

Note: Double-door models are available with four different center-to-center dimensions between latchbolt keepers. Keepers are wide enough to compensate for vertical-rod exit bolts which may be as much as 3/8" (10mm) off center-to-center dimension, either way.

Note: When using an electric strike in conjunction with a vertical-rod exit device:

1. The bottom rod of the exit device must be removed or made inoperative.
2. The latchbolt of the exit device must be the "Pullman" or beveled type.
3. The latchbolt must be free-latching and remain projected while the door is open. Mechanisms that hold the latchbolt retracted while the door is open, and automatically release it when the door is closed, must be removed or made inoperative

