


CAMUTP24

Camera Surge Protection Panel for
video, RS422 and 24 volt power

The CAMUTP24 is designed to provide multistage surge video protection for fixed and PTZ cameras. It is ideally suited for outdoor cameras which need extreme protection on all signal connections.

The CAMUTP24 provides a heavy single point ground connection and can be installed in minutes. Proper installation is critical to proper operation of the unit. Please read installation instructions completely and insure good ground connections.

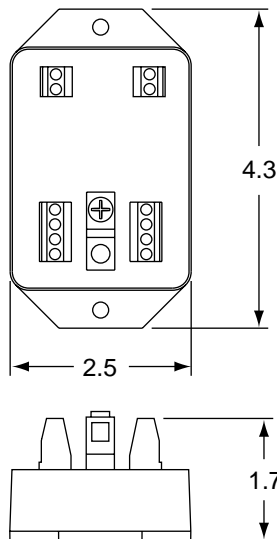

SPECIFICATION

Size	1.7"H x 4.3"W x 2.5"D	Temperature	-40C to +85C
Power Requirements	NONE REQUIRED	Frequency	DC to 10 MHz
Video Insertion Loss	<0.2dB		
Impedance	50 or 75 ohms		

Limited Lifetime Warranty

NITEK warrants that this product is to be free from defects in materials and workmanship, for the life of the product. The warranty given by NITEK is in lieu of any other warranties, express or implied. NITEK assumes no responsibility for damages or penalties incurred resulting from the use of this product. NITEK's liability under any warranties shall be discharged by replacing or repairing, at our option, the defective product. NITEK's liability for any product shall not exceed a refund of the purchase price. The warranty listed here is intended only as a summary of your full and complete warranty. For a full and complete warranty of this product contact NITEK.

NITEK®

5410 Newport Drive, Suite 24 • Rolling Meadows, IL 60008

(800) 528-4343 • (847) 259-8900 • FAX (847) 259-1300

Internet: www.nitek.net • E-mail: info@nitek.net

CAMUTP24

Camera Surge Protection Panel for video, RS422 and 24 volt power

INSTALLATION

The CAMUTP24 must be properly installed to insure maximum protection. The function of the CAMUTP24 is to allow a surge to be routed to ground and to clamp the protected equipment inputs to a minimum voltage.

There are three key points to remember when installing the CAMUTP24. First provide a low impedance connection between the CAMUTP24 and your protected equipment. This is best done by keeping the **PROTECTED** cable connections as short as possible.

Second the system should use a single ground point. Connect the grounding stud of the CAMUTP24 to a single ground point. A single ground point is a proper building ground or earth ground to which equipment grounds are connected. Ideally the protected equipment should be isolated from ground. If the CAMUTP24 and the protected equipment are both grounded you will provide a parallel path to ground and a portion of the surge current can flow through that path.

Finally, the **UNPROTECTED** cables should not be crossed with the **PROTECTED** cables. Crossing cables could provide a path for surge currents to bypass the CAMUTP24 protection circuits.

