


LCN 4000T SERIES

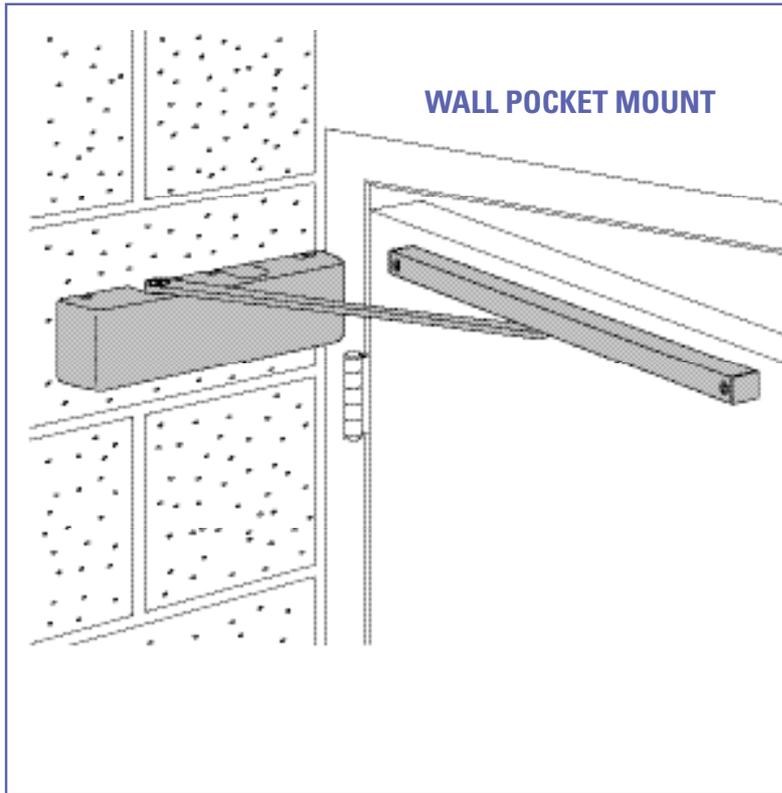


The 4000T is a heavy duty closer to reliably control fire and smoke barrier doors with maximum swing of 90°.

Designed for use with an SEM 7850 wall magnet.

- ▶ **Cast Iron**
- ▶ **Forged Steel Arm**
- ▶ **Double Heat Treated Steel Pinion**
- ▶ **All Weather Fluid**
- ▶ **UL & cUL Listed**

- ▶ 4000T series closer is shipped with standard arm, standard track, track roller, standard plastic clip-on cover, and wood and machine screw pack. See 4000T Series page 73 for options.
- ▶ Sized cylinders for interior fire/smoke barrier doors to 4'0".
- ▶ Closer mounts in a wall pocket, hinge side, on either right or left hand door.
- ▶ Standard or optional custom powder coat finish.
- ▶ Optional plated finish on metal cover, arm and fasteners.
- ▶ Optional SRI primer for installations in corrosive conditions is available with powder coat only.
- ▶ The 4000T Series is UL and cUL listed with a standard arm for self-closing doors.
- ▶ Tested and certified under ANSI Standard A156.4, grade one.

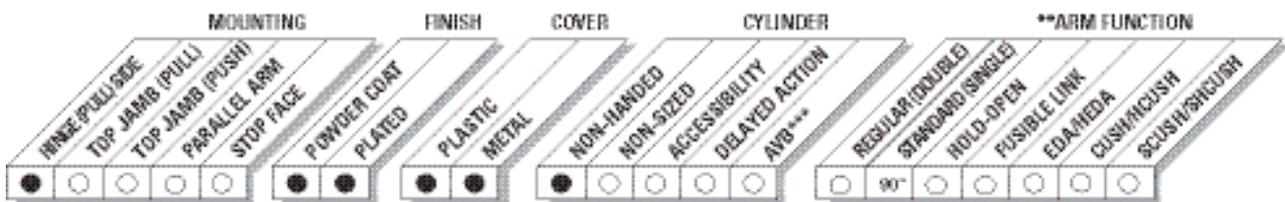

● Available
○ Not available

**Maximum opening/hold-open point with standard template.
*** Advanced Variable Backcheck

LCN 4000T SERIES

WALL POCKET MOUNTING

Cylinder mounts on wall.

Track mounts on hinge side of door.

MAXIMUM OPENING

Templating allows 90° only.

Hold-open point 90° with magnet.

Dimension 1 is the distance from the centerline of the closer shaft to the centerline of the hinge or pivot. For pocket pivot or total door hinge, 9 1/2" (241 mm).

For butt hinge 8" (203 mm).

For center pivot 10" (254 mm).

Dimension 2 is the distance from the centerline of the pivot or hinge to the cylinder mounting surface. For pocket pivot 4 1/2" (114 mm).

For total door hinge 3 7/8" (98mm)

For butt hinge 2 7/8" (73 mm).

For center pivot 4 1/2" (114 mm).

Dimension 3 is the distance from the centerline of the pivot or hinge to end of the track.

For pocket pivot or total door hinge, 3 7/8" (98mm).

For butt hinge 2 3/8" (60mm).


For center pivot 4 5/8" (117mm).

Options

- Metal cover.

Special Templates

Customized installation templates or products may be available to solve unusual applications. Contact LCN for assistance.

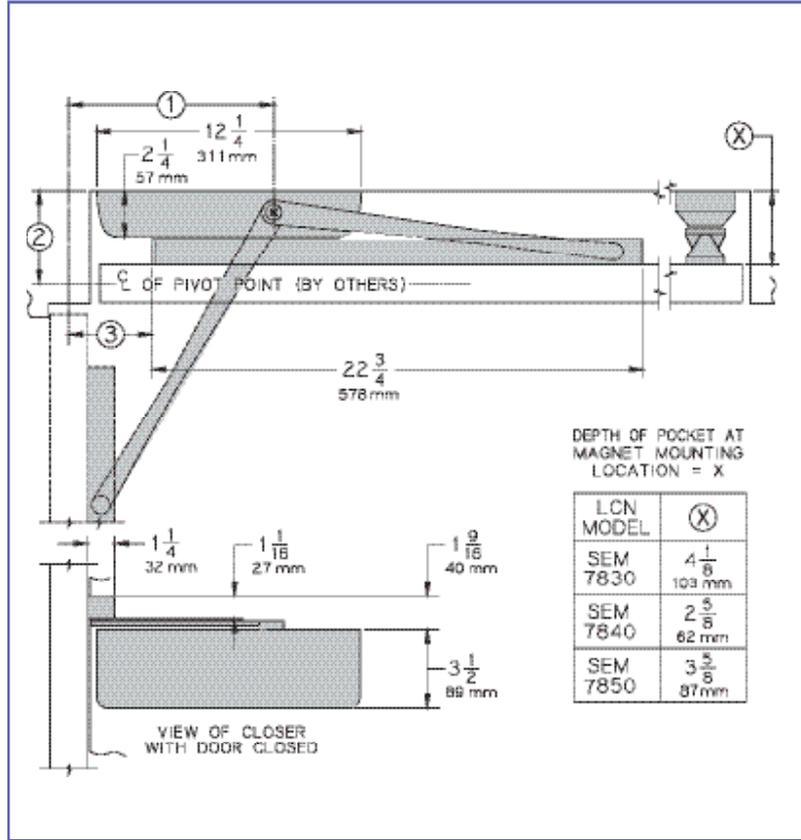


- **Butt Hinges, Pocket Pivot, Total Door Hinge** or **Center Pivot** are door mounting options.
- **Butt Hinges** should not exceed 5" (127 mm).
- **Pocket Depth**, See above table for distance required between door and closer mounting location. This dimension is measured from the cylinder mounting surface to the pull side face of the door at 90°.
- **Wall Magnet SEM 7850** is recommended. Use of other magnets may require special construction to alter the depth of the pocket at the magnet location. See Fire Life Safety Section.

LCN 4000T SERIES

CYLINDERS

CYLINDER, 4000T-3071


Standard, non-handed cast iron cylinder assembly.

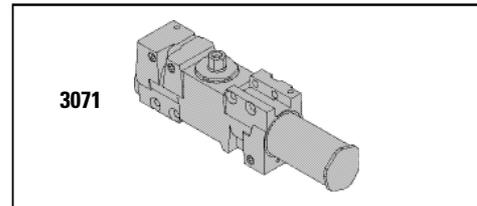

COVERS


COVER, 4000T-72

Standard, non-handed plastic clip-on cover.

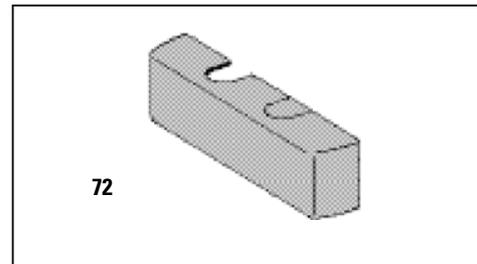

METAL COVER, 4000T-72MC


Optional, handed cover. Required for plated and custom powder coat finishes.

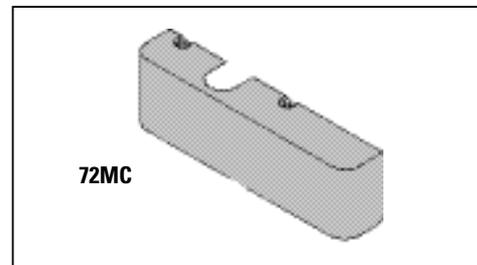

ARM

STANDARD ARM, 4000T-3077T


Non-handed arm.

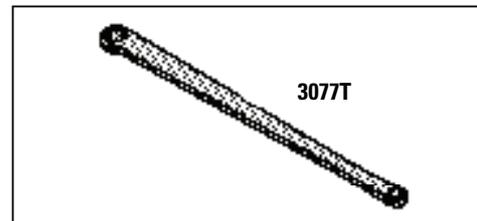

TRACK


STANDARD TRACK, 4000T-3038

Standard, non hold-open, non-handed track.
Will not accept hold-open clip or bumper assembly.

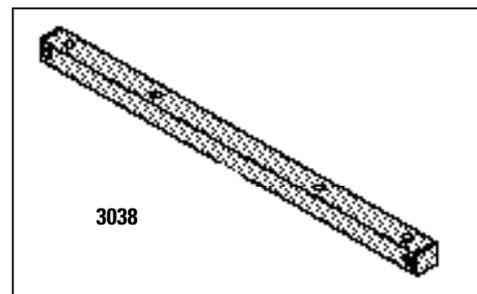

TRACK ROLLER, 4000T-3034

Quiet, low friction roller assembly.
Shoulder Dimension "X" = 1/8" (3 mm).

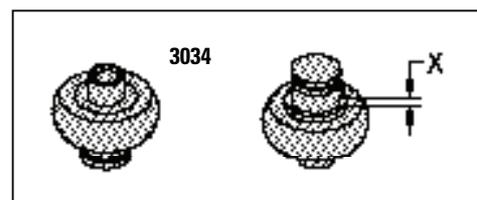

LCN 4000T SERIES

TABLE OF SIZES

Select closer based on width of door.
4000T Series cylinders available in size 3 or 4.
Closing power of 4000T Series closers is not adjustable.

→ Indicates recommended range of door width for closer size.

INTERIOR DOOR WIDTH

	28" 711mm	34" 868mm	38" 965mm	42" 1067mm	48" 1219mm
4003T		size 3			size 4
4004T					size 4
Minimum Door Width					

HOW-TO-ORDER 4000T SERIES CLOSERS

1. SELECT CYLINDER SIZE

- 4003T
- 4004T

2. SELECT FINISH

- Standard Powder Coat _____
Aluminum, Dark Bronze, Statuary,
Light Bronze, Black, Brass.

Closer will be shipped with:

- STANDARD CLIP-ON COVER,
- STANDARD ARM,
- TRACK ROLLER,
- STANDARD TRACK,
- WOOD and MACHINE SCREW PACK,
unless options below are selected.

CLOSER OPTIONS

COVER

- Metal (MC)

FINISH

- Custom Powder Coat (RAL) _____
(handed metal cover required)
- Plated Finish, US _____
(handed metal cover required)
- SRI primer

SCREW PACK

- TB*, Wood & Machine Screw (TBWMS)
- TORX Machine Screw (TORX)
- TB* & TORX Machine Screw (TBTRX)

* Specify door thickness if other than 1 3/4".

SPECIAL TEMPLATE

- ST- _____