


# LCN 4020T SERIES

## FEATURES

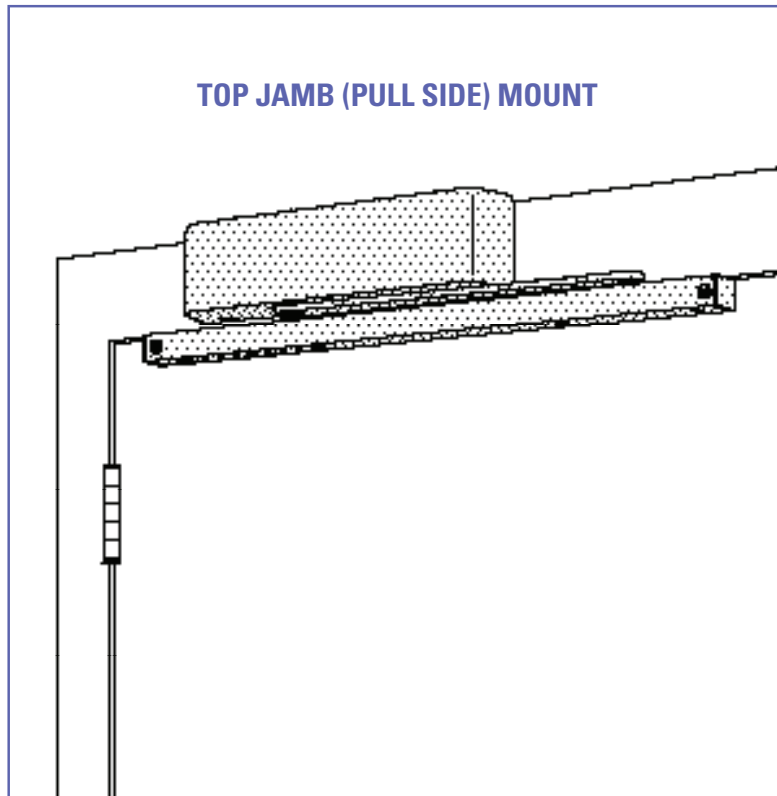


*The 4020T SMOOTHIE® is LCN's best performing heavy duty track closer designed specifically for interior doors in institutional and other high traffic applications.*

- ▶ **Cast Iron**
- ▶ **Forged Steel Arm**
- ▶ **Double Heat Treated Steel Pinion**
- ▶ **All Weather Fluid**
- ▶ **Fast & Accurate Installation**
- ▶ **UL & cUL Listed**

- ▶ Standard 4020T series closer is shipped with standard arm, standard track, track roller, standard plastic cover, and self reaming and tapping screws. See 4020T Series pages 21 & 22 for options.
- ▶ Sized cylinders for interior doors to 4'0".
- ▶ Closer mounts top jamb (pull side), specify right or left swinging door.
- ▶ Closers to meet ADA requirements. See 4020T Series page 23.
- ▶ Standard or optional custom powder coat finish.
- ▶ Optional plated finish on metal cover, arm and fasteners.
- ▶ Optional SRI primer for installations in corrosive conditions is available with powder coat only.
- ▶ The 4020T Series is UL and cUL listed with a standard track for self-closing doors.
- ▶ Tested and certified under ANSI Standard A156.4, grade one.

MOUNTING					FINISH		COVER		CYLINDER				**ARM FUNCTION							
INSE (PULL) SIDE	TOP JAMB (PULL)	TOP JAMB (PUSH)	PARALLEL ARM	STOP FACE	POWDER COAT	PLATED	PLASTIC	METAL	NON-HANDED	NON-SIZED	ACCESSIBILITY	DELAYED ACTION	AVB**	REGULAR (DOUBLE)	STANDARD (SINGLE)	HOLD-OPEN	FUSIBLE LINK	EDA/HEDA	CUSH/CUSH	SCUSH/SCUSH
<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	180°	100°	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>

- Available
- Not available

 Closer available with less than 5.0 lbs. opening force on 36" door.  
 \*\*Maximum opening/hold-open point with standard template.  
 \*\*\* Advanced Variable Backcheck

# LCN 4020T SERIES

## TOP JAMB (PULL SIDE) MOUNTING

### MAXIMUM OPENING

Templating allows 180° with standard track arm, limited to 100° with optional bumper installed.

Consult factory if door will be held open at 180°

Hold-open points at 80°, 85°, 90°, 95°, or 100° with hold-open tracks.


Please note that many track style door closers are capable of allowing 180° of door swing. Be aware that the majority of track style closers are at their weakest closing force in the 180 – 130° range. Consult factory for applications where exterior or large/heavy door must swing 180°.

### Options

- ▶ Standard track with bumper, hold-open track, hold-open track with bumper.
- ▶ Metal cover.

### Special Templates

Customized installation templates or products may be available to solve unusual applications. Contact LCN for assistance.

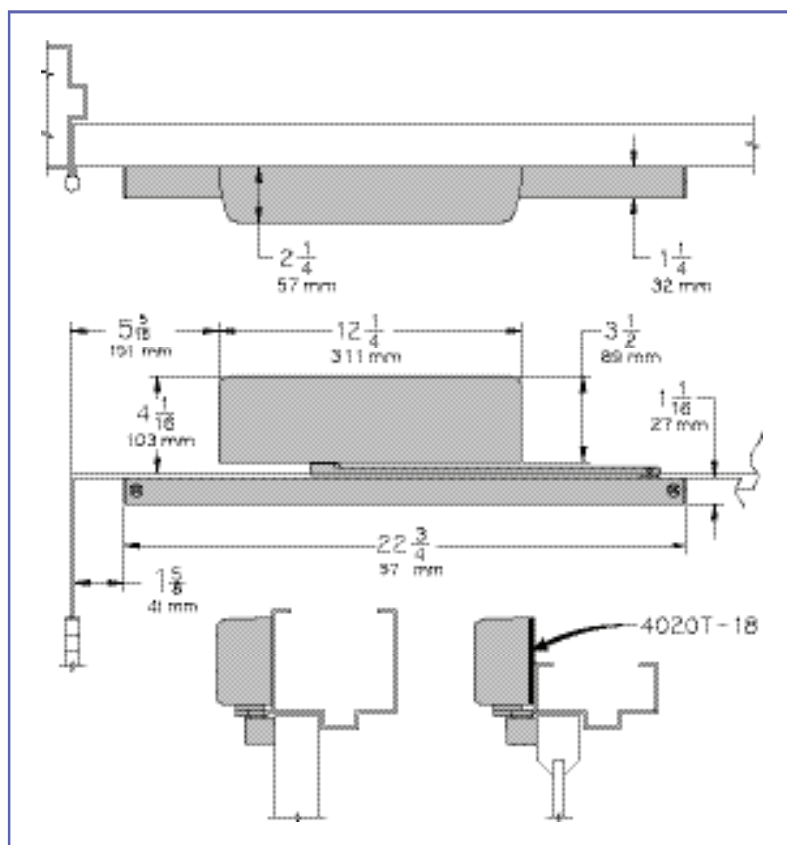

- ▶ **Butt Hinges** should not exceed 5" (127 mm) in width.
- ▶ **Auxiliary Stop** is recommended at hold-open point or where a door cannot swing 180°. Optional track bumper assembly assists backcheck in cushioning the opening swing of the door. It is not intended to replace an auxiliary stop.
- ▶ **Reveal** should not exceed 1/8" (3 mm).
- ▶ **Head Frame** less than 3 7/8" (98 mm), requires PLATE, 4020T-18. Plate requires 1 3/4" (44 mm) minimum.
- ▶ **Clearance** of 1 1/2" (38 mm) behind door required for 90° or 180° installation.


# LCN 4020T SERIES

## CYLINDERS

### CYLINDER, 4020T-3071

Standard, handed cast iron cylinder assembly.


For various applications see "Table of Sizes" on 4020T Series page 23.

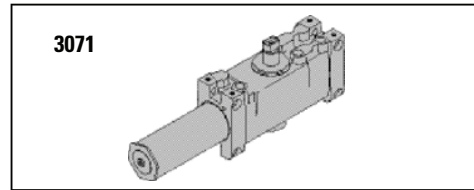

## COVERS


### COVER, 4020T-72

Standard, handed plastic cover.

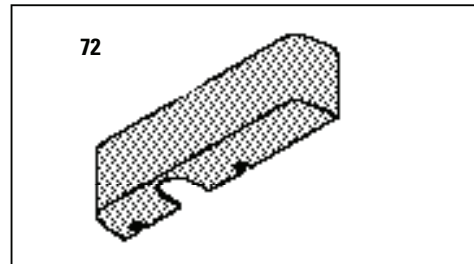

### METAL COVER, 4020T-72MC

Optional, handed cover. Required for plated finishes and custom powder coat finishes.

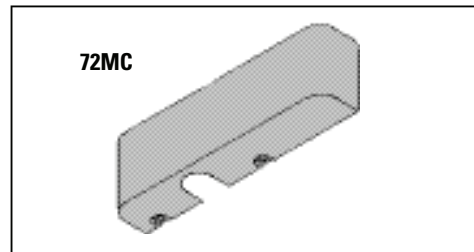


## ARMS

### STANDARD ARM, 4020T-3077T

Handed arm.

Roller not included with arm.

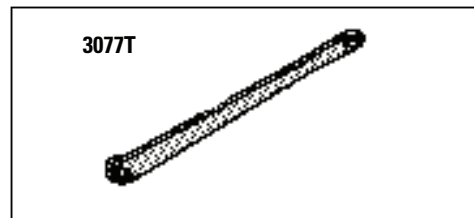

## TRACKS

### STANDARD TRACK, 4020T-3038


Standard, non hold-open, non-handed track.

Will accept hold-open clip and/or bumper assembly.

### STANDARD TRACK with BUMPER, 4020T-3038B

Optional non hold-open, non-handed track with bumper assembly installed.

Will accept hold-open clip.

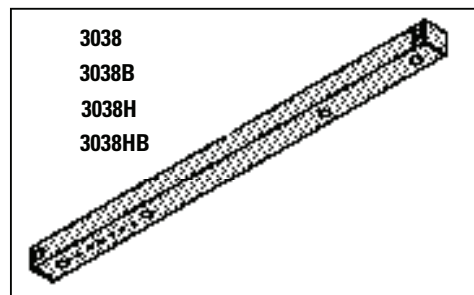

### HOLD-OPEN TRACK, 4020T-3038H

Optional, non-handed track with hold-open clip installed.

Will accept bumper assembly.

### HOLD-OPEN TRACK with BUMPER, 4020T-3038HB

Optional, non-handed track with hold-open clip and bumper assembly installed.


# LCN 4020T SERIES

## INSTALLATION ACCESSORIES

### PLATE, 4020T-18

Required where head frame is less than 3 7/8" (98 mm).

Plate requires minimum 1 3/4" (44 mm) frame face.

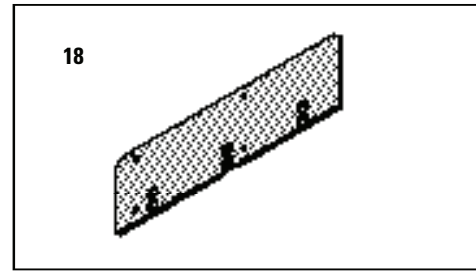


### TRACK BUMPER, 4020T-169

Mounts in track to assist backcheck, not replace auxiliary stop.

Limits maximum opening.

Consists of bumper, bumper post, and mounting screw.

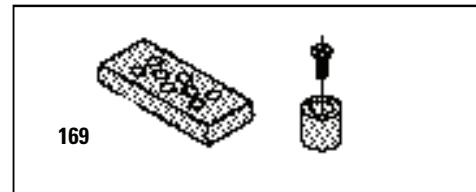


### HOLD-OPEN CLIP, 4020T-3054

Mounts in track to provide hold-open function.

Hold-open point controlled by clip location.


Consists of clip and mounting screws.

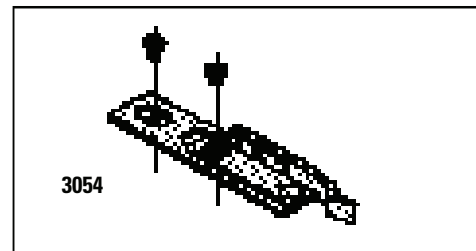

### TRACK ROLLER, 4020T-3034

Quiet, low friction roller assembly.

Shoulder dimension "X" = 1/16" (2mm).

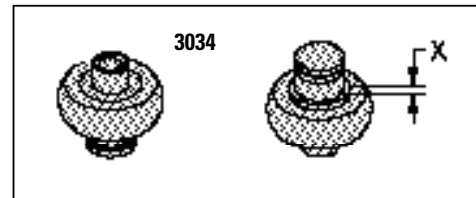

## TABLE OF SIZES

Select closer based on width of door.  
4020T Series cylinders available in size 1, 3 or 4.

Closing power of all 4020T Series closers may be increased 15%.  
Specify next higher size closer where strong drafts exist

→ Indicates recommended range of door width for closer size.

### INTERIOR DOOR WIDTH


	26" 660mm	34" 868mm	38" 965mm	48" 1219mm
	size 1	size 3	size 4	
4023T				
4024T				

Minimum door width

## REDUCED OPENING FORCE 4020T CLOSERS

**CAUTION !** Any manual door closer, including those certified by BHMA to conform to ANSI Standard A156.4, that is selected, installed and adjusted based on ADA or other reduced opening force requirements may not provide sufficient power to reliably close and latch a door.

Refer to POWER OPERATORS section for information on systems that meet reduced opening force requirements without effecting closing power.

	DOOR WIDTH	36"	42"	48"
	8.5* lbs.	N/A	N/A	N/A
	5.0* lbs.	4021T	4021T	4021T

\* Maximum opening force

# LCN 4020T SERIES

## HOW-TO-ORDER 4020T SERIES CLOSERS

### 1. SELECT CYLINDER SIZE

- ☐ 4021T (ADA)
- ☐ 4023T
- ☐ 4024T

### 2. SPECIFY HAND

- ☐ RH
- ☐ LH

### 3. SPECIFY FINISH

- ☐ Standard Powder Coat \_\_\_\_\_  
Aluminum, Dark Bronze, Statuary,  
Light Bronze, Black, Brass.

#### Closer will be shipped with:

- STANDARD COVER,
- STANDARD ARM,
- TRACK ROLLER,
- STANDARD TRACK,
- SELF-REAMING and TAPPING SCREWS  
unless options listed below are selected.

## CLOSER OPTIONS

### COVER

- ☐ Metal (MC)

### FINISH

- ☐ Custom Powder Coat (RAL) \_\_\_\_\_  
(handed metal cover required)
- ☐ Plated Finish, US \_\_\_\_\_  
(handed metal cover required)
- ☐ SRI primer

### TRACK

- ☐ Standard with Bumper (BUMPER)
- ☐ Hold-Open (HO)
- ☐ Hold-Open with Bumper (HBUMPER)

### SCREW PACK

- ☐ TB\* & SRT Screw (TBSRT)
- ☐ Wood & Machine Screw (WMS)
- ☐ TB\*, Wood & Machine Screw (TBWMS)
- ☐ TORX Machine Screw (TORX)
- ☐ TB\* & TORX Machine Screw (TBTRX)

\* Specify door thickness if other than 1 3/4".

### INSTALLATION ACCESSORY

- ☐ Plate, 4020T-18

### SPECIAL TEMPLATE

- ☐ ST- \_\_\_\_\_