

II - E1500-13

EXIT DEVICE INSTALLATION INSTRUCTIONS

FOR USE WITH K-125 SWITCH KIT, DORMA 9000 SERIES
EXIT DEVICES

SWITCH MONITORS EGRESS BY PUSHBAR ACTIVATION OF EXIT DEVICE.

INSTALLATION INSTRUCTIONS

- STEP 1: REMOVE DEVICE FROM DOOR IF APPLICABLE.
- STEP 2: SLIDE END COVER OFF OF DEVICE.
- STEP 3: REMOVE 2 SCREWS THAT HOLD HEAD ASSEMBLY TO CHANNEL AND REMOVE HEAD.
- STEP 4: REMOVE SIX SCREWS FROM BACK OF DEVICE AND SLIDE PUSH-BAR ASSEMBLY OUT OF CHANNEL.
- STEP 5: REMOVE E-CLIP FROM REAR PIVOT ASSEMBLY ON SIDE THAT IS SHOWN IN ILLUSTRATION.
- STEP 6: INSTALL SWITCH KIT K-125 ONTO PIVOT PIN AND REASSEMBLE E-CLIP.
- (NOTE: MAKE SURE THAT SWITCH ARM IS LOCATED UNDER PIVOT ARM AS SHOWN IN ILLUSTRATION).
- STEP 7: CHECK FOR PROPER SWITCH ACTIVATION WHEN PUSHBAR IS FULLY DEPRESSED,
REFER TO COLOR CODE CHART FOR PROPER WIRING PER APPLICATION.
- STEP 8: MAKE SURE COLOR CODE FOR WIRES CHART IS USED FOR PROPER HOOK-UP OF SWITCH CONTACTS.
- STEP 9: RE-ASSEMBLE EXIT DEVICE. (REVERSE STEPS 1 THROUGH 4)


COLOR CODE FOR WIRES

- YELLOW WIRE: COMMON
- RED WIRE: NORMALLY OPEN
- GRAY WIRE: NORMALLY CLOSED
- WIRE GAUGE: #22 AWG

ELECTRICAL SPECIFICATIONS

- SPDT MONITOR SWITCH
- CONTACT RATING: 4 AMP @ 250VAC

REMOVE 2 EACH SCREWS
AND REMOVE HEAD ASSEMBLY

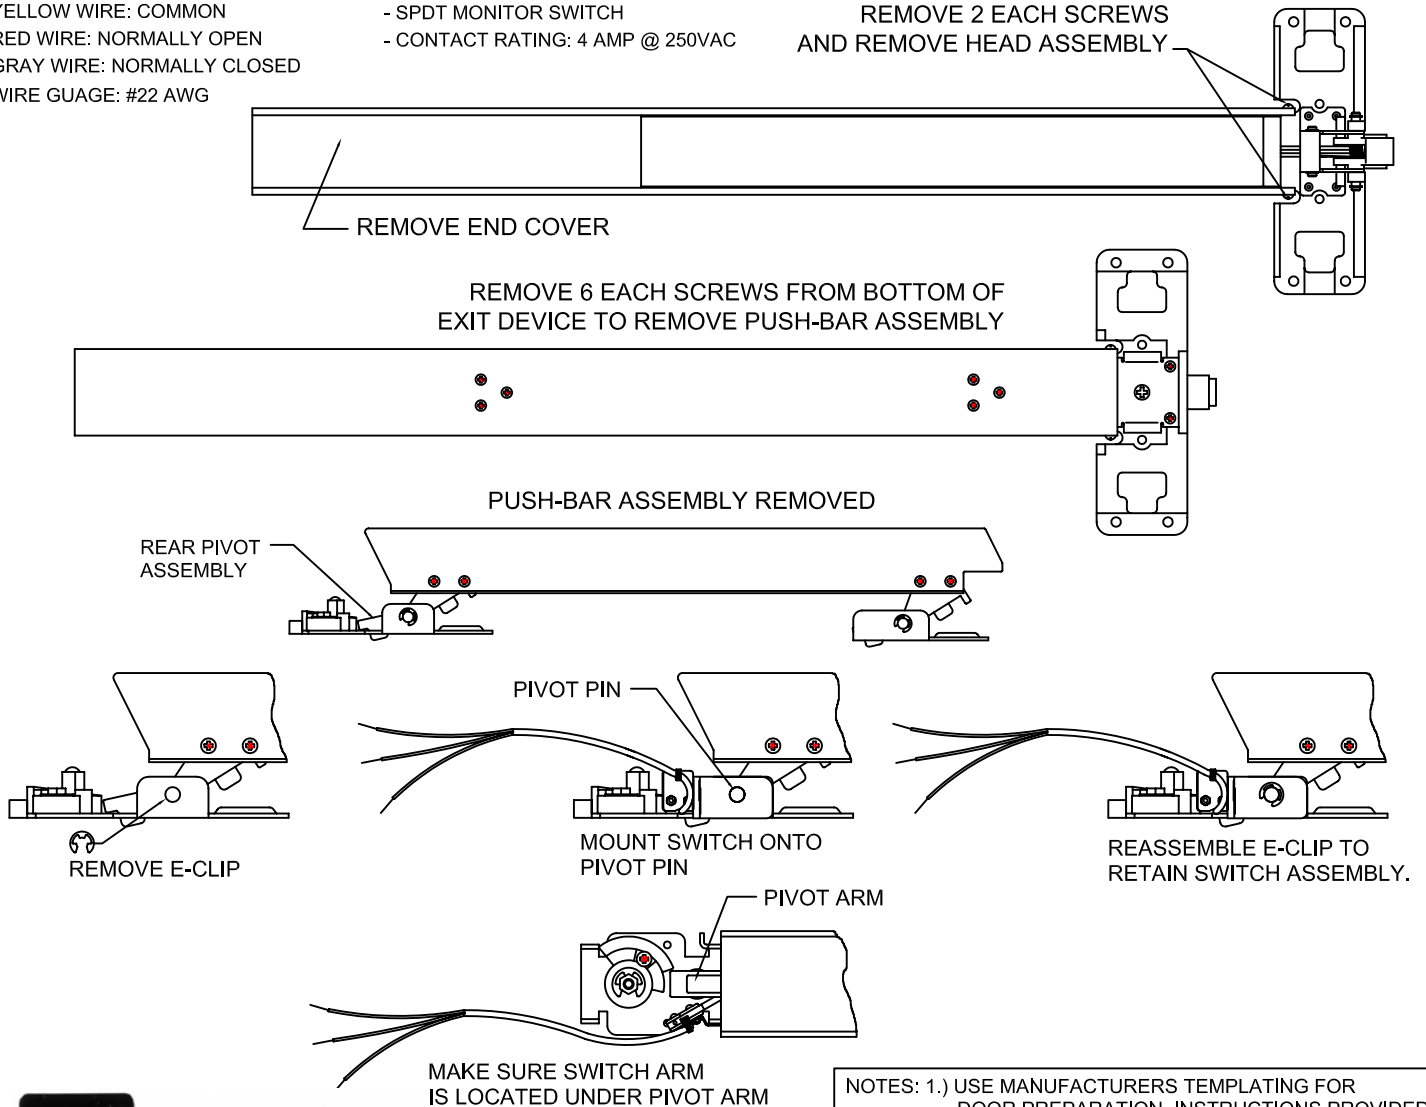

NOTES: 1.) USE MANUFACTURERS TEMPLATING FOR
DOOR PREPARATION. INSTRUCTIONS PROVIDED
AS SHOWN FOR SWITCH KIT MODIFICATION
MODEL K-125

