

II - E1500-19

EXIT DEVICE INSTALLATION INSTRUCTIONS

FOR USE WITH K-102 SWITCH KIT, VON DUPRIN
MODEL 88 EXIT DEVICES,
SWITCH MONITORS EGRESS BY PUSH BAR ACTIVATION
OF EXIT DEVICE.

ELECTRICAL SPECIFICATIONS


- SPDT MONITOR SWITCH
- CONTACT RATING: 4 AMP @ 250VAC

COLOR CODE FOR WIRES

- YELLOW WIRE: COMMON
- RED WIRE: NORMALLY OPEN
- GRAY WIRE: NORMALLY CLOSED
- WIRE GAUGE: #22 AWG

INSTALLATION INSTRUCTIONS

- STEP 1: REMOVE TWO SCREWS AND HOLD DOWN CLAMP (NOTE POSITION OF CLAMP, THE HIGH END IS POSITIONED TOWARD TOP OF HOUSING, THE SHORT END GOES TOWARDS THE BOTTOM).
- STEP 2: REMOVE SPRING MECHANISM FROM HOUSING. NEXT PLACE SWITCH ASSEMBLY INTO HOUSING AS SHOWN. CAREFULLY REPLACE THE SPRING MECHANISM BACK INTO HOUSING.
- STEP 3: REPLACE HOLD DOWN CLAMP WITH SCREWS REMOVED IN STEP 1. BEFORE FULLY TIGHTENING THE SCREWS, MAKE SURE SPRING MECHANISM IS ACTIVATING THE SWITCH. ADJUST BRACKET ASSEMBLY AS NECESSARY FOR PROPER SWITCH ACTIVATION THEN TIGHTEN SCREWS FULLY.

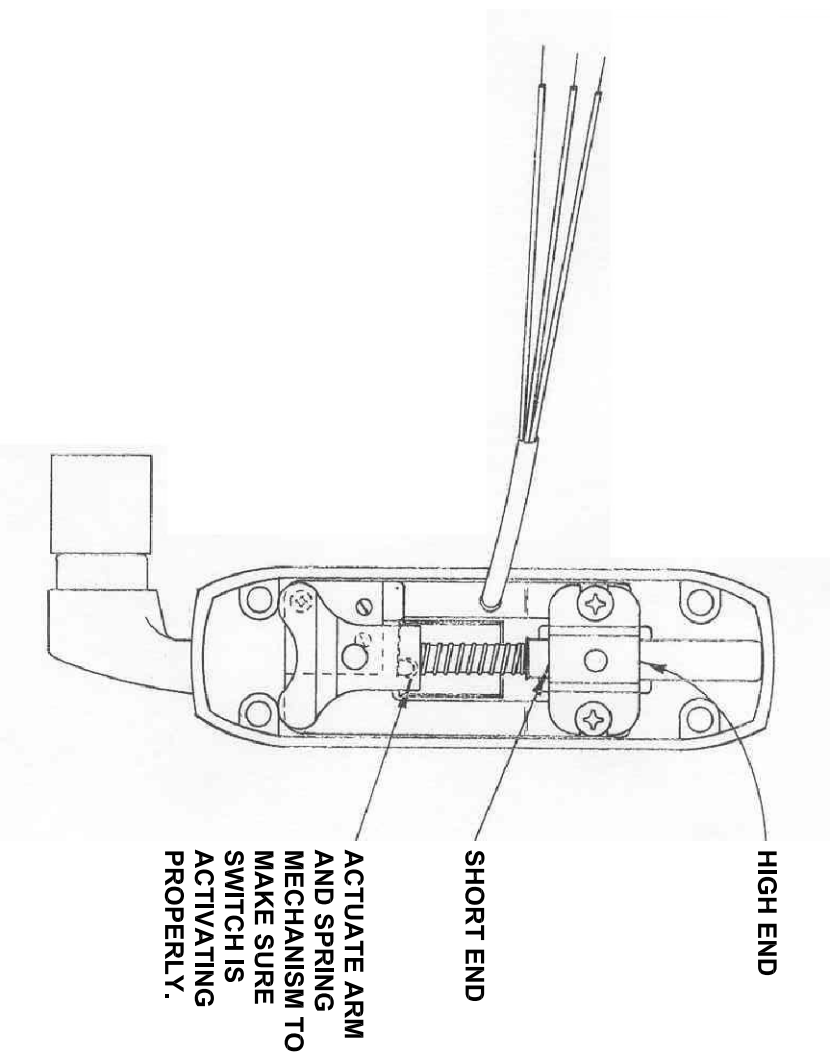

10666 GATEWAY BLVD., ST. LOUIS, MO 63132 (800) 753-5558

REV. 02/10

NOTES: 1.) USE MANUFACTURERS TEMPLATING FOR
DOOR PREPARATION. INSTRUCTIONS PROVIDED
AS SHOWN FOR SWITCH KIT MODIFICATION
MODEL K-102