

II - E1500-3

EXIT DEVICE INSTALLATION INSTRUCTIONS

FOR USE WITH K-108 SWITCH KIT, JACKSON MODELS: 1085 AND 1095 EXIT DEVICES
SWITCH MONITORS EGRESS BY PUSHBAR ACTIVATION OF EXIT DEVICE

ELECTRICAL SPECIFICATIONS

- SPDT MONITOR SWITCH
- CONTACT RATING: 4 AMP @ 250VAC


COLOR CODE FOR WIRES

- YELLOW WIRE: COMMON
- RED WIRE: NORMALLY OPEN
- GRAY WIRE: NORMALLY CLOSED
- WIRE GAUGE: #22 AWG

INSTALLATION INSTRUCTIONS

- STEP 1: MOUNT THE SWITCH KIT ASSEMBLY ON THE BACK OF THE HINGE STYLE CASE.
- STEP 2: LOCATE SWITCH AS SHOWN.
- STEP 3: SECURE ASSEMBLY WITH SCREWS PROVIDED.
- STEP 4: DRILL PREP HOLE FOR WIRES AND PROVIDE RACEWAY TO ELECTRIC HINGE.

INSTALL PROVIDED SCREWS
TO SECURE ASSEMBLY

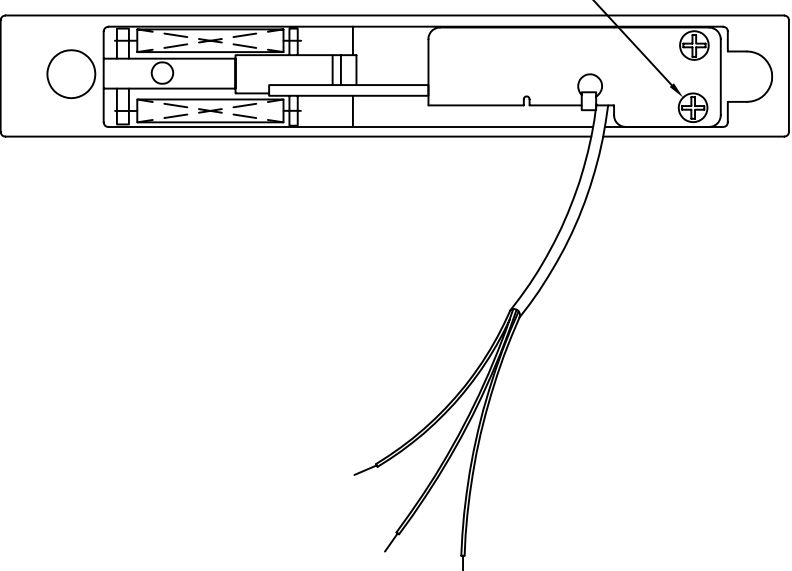

NOTES: 1.) USE MANUFACTURERS TEMPLATING FOR
DOOR PREPARATION. INSTRUCTIONS PROVIDED
AS SHOWN FOR SWITCH KIT MODIFICATION
MODEL K-108

