


# II - E1500-4

## EXIT DEVICE INSTALLATION INSTRUCTIONS

FOR USE WITH K-109 SWITCH KIT, CORBIN RUSSWIN ED4000, ED5000 AND YALE 7000 SERIES EXIT DEVICES  
SWITCH MONITORS EGRESS BY PUSHBAR ACTIVATION OF EXIT DEVICE

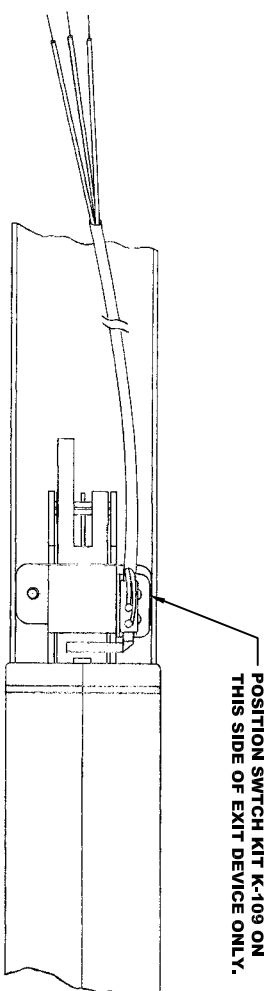


### ELECTRICAL SPECIFICATIONS

- SPDT MONITOR SWITCH
- CONTACT RATING: 4 AMP @ 250VAC

### COLOR CODE FOR WIRES

- YELLOW WIRE: COMMON
- RED WIRE: NORMALLY OPEN
- GRAY WIRE: NORMALLY CLOSED
- WIRE GAUGE: #22 AWG

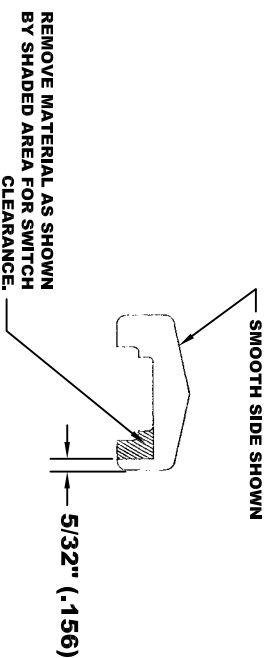

### INSTALLATION INSTRUCTIONS

- STEP 1: REMOVE REAR COVER AND BOTTOM CHANNEL COVER.
- STEP 2: LOCATE EXPOSED REAR CRASH BAR MECHANISM.
- STEP 3: REMOVE SCREW INDICATED IN ILLUSTRATION FROM BOTTOM OF DEVICE AND DISCARD.
- STEP 4: POSITION SWITCH BRACKET AS SHOWN AND REPLACE WITH SCREW THAT IS PROVIDED.
- STEP 5: MODIFY REAR BLACK END CAP COVER AS SHOWN.
- STEP 6: REPLACE BOTTOM CHANNEL, COVER AND REAR END CAP.

NOTES: 1.) USE MANUFACTURERS TEMPLATING FOR DOOR PREPARATION. INSTRUCTIONS PROVIDED AS SHOWN FOR SWITCH KIT MODIFICATION MODEL K-109

