

FEATURES



The 4310ME is UL listed for smoke barrier or labeled fire doors. Tested and certified under ANSI Standard A156.15. Conforms to life safety code, NFPA 101. An ME provides only the closer/holder function.

- ▶ Standard 4310ME series closer shipped with a 24V or 120V cylinder (please specify) on a mounting plate, metal cover, Swing-Free arm, track, track roller, and wood and machine screw pack. See 4310ME Series pages 29 & 30 for options.
- ▶ Sized cylinder for interior doors to 4'0".
- ▶ Functions as full rack and pinion door closer when hold-open is not engaged or current is interrupted with Swing-Free arm engaged.
- ▶ Handed for right or left swinging door.
- ▶ Concealed or exposed electrical connections.
- ▶ Built-in "On/Off" switch controls hold-open function.
- ▶ Swing-Free arm allows door to be moved without door closer resistance.
- ▶ Interfaces with fire alarm systems. Consult factory.
- ▶ Standard or optional custom powder coated finish.
- ▶ Optional plated finish on cover, arm, and fasteners.

● Available
○ Not available

* Maximum hold-open with standard template. See individual closer series for degrees of opening and hold-open per installation.

LCN 4310ME SERIES

HINGE (PULL) SIDE MOUNTING

Information applies to ME closer.

MAXIMUM OPENING

Templating allows 180°.

Infinite hold-open points up to 160°.

Optional double egress arm limited to 95°.

Please note that many track style door closers are capable of allowing 180° of door swing. Be aware that the majority of track style closers are at their weakest closing force in the 180 – 130° range. Consult factory for applications where exterior or large/heavy door must swing 180°.

ME ELECTRICAL OPTIONS


These assemblies have a single electrical circuit with a choice of voltages. A separate TRANSFORMER, 4040SE-3210, can be used to reduce line voltage to 24V AC. Circuitry accepts either AC or DC input. 24V holding solenoid (**24**) or 120V holding solenoid (**120**), please specify.

Options


- ▶ Hold-open bypass.
- ▶ Double egress arm.
- ▶ 24V or 120 volt input, please specify.

Special Templates

Customized installation templates or products may be available to solve unusual applications. Contact LCN for assistance.

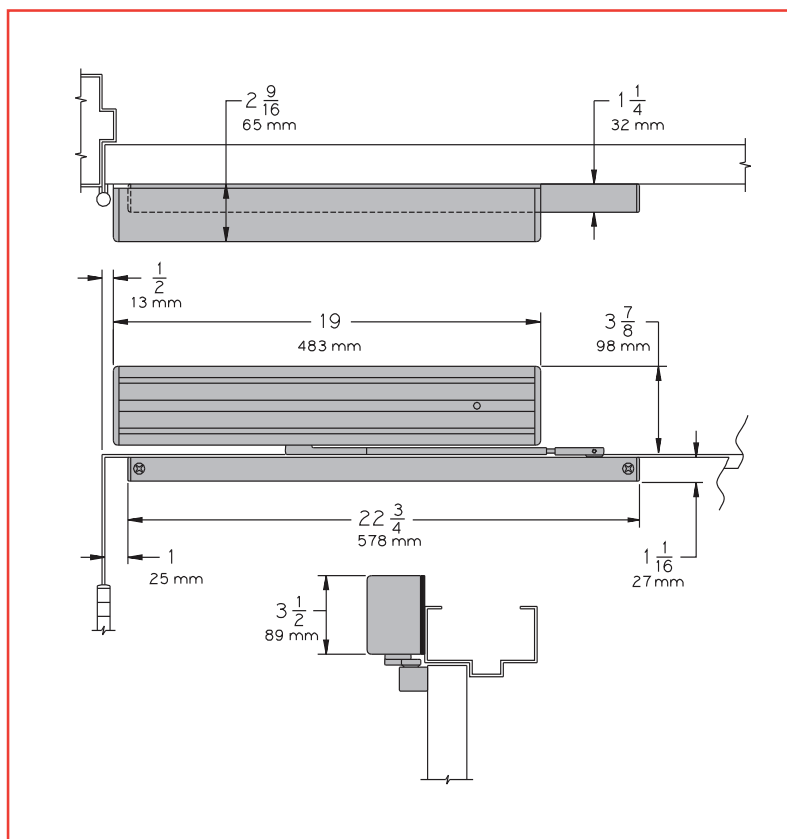

- ▶ **Butt Hinges** should not exceed 4 1/2" (114 mm) in width.
- ▶ **Top Rail** 1 1/16" (27 mm) minimum.
- ▶ **Reveal** should not exceed 1/8" (3 mm) for Swing-Free arm. Should not exceed 2 11/16" (68 mm) for double egress arm.
- ▶ **Head Frame** requires 2" (51 mm) minimum.
- ▶ **Clearance** of 1 1/4" (32 mm) behind door required for installation.
- ▶ **Bypass** (suffix "B80 or B140") eliminates hold-open function up to a specified point of the doors swing. B80 cylinder from 0° to 80°. B140 cylinder from 0° to 140°.
- ▶ **Wiring Diagram**

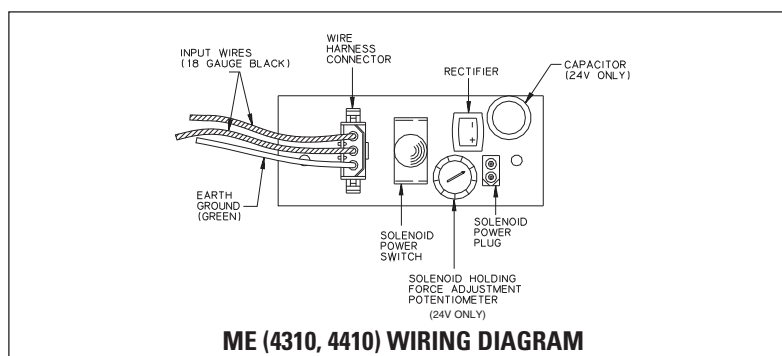

LCN 4310ME SERIES


ACCESSORIES

CYLINDER

ME CYLINDER, 4310ME-3971

Standard, handed cast iron cylinder assembly. 24V holding solenoid **(24)** or 120V holding solenoid **(120)**, please specify.


4310ME-3971



ME CYLINDER, 4310ME-3071

Standard, handed cylinder and mounting plate assembly. "On/Off" switch assembly controls hold-open function. Circuitry accepts either AC or DC input. 24V holding solenoid **(24)** or 120V holding solenoid **(120)**, please specify.

4310ME-3071




COVERS

COVER, 4310ME-72MC

Handed, metal cover.

4310ME-72MC




ARMS

SWING-FREE ARM, 4310ME-3077SF

Handed arm.
After door is placed in hold-open, secondary pivot point allows up to 160° swing without door closer resistance.


3077SF



DOUBLE EGRESS ARM, 4310ME-3077DE

Optional, handed arm for double egress doors and frames. 2 11/16" (68 mm) maximum reveal.

3077DE




TRACK

TRACK, 4310ME-3038

Standard, non-handed track.

3038




LCN 4310ME SERIES

SWITCH

SWITCH, 4310ME-3351


"On/Off" switch assembly provides continuous hold-open function. Available as 24V or 120V, please specify.

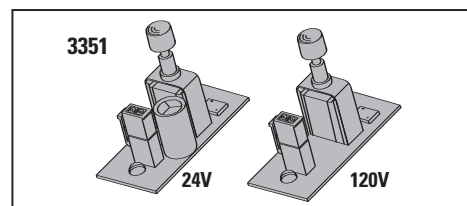

INSTALLATION ACCESSORIES


TRACK ROLLER, 4310ME-3034

Quiet, low friction roller assembly. Shoulder dimension "X" = 1/8" (3mm).

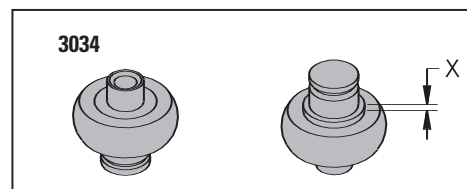


TRANSFORMER, 4040SE-3210

Reduces line voltage from 120V to 24V AC. Mounted on cover for 4" (102 mm) x 4" x 2 1/8" (54mm) junction box (by others).

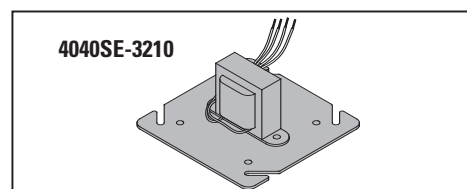

ME WIRING HARNESS, 4310ME-3354

Three wire harness with 6" (152 mm) leads for field wiring connections.

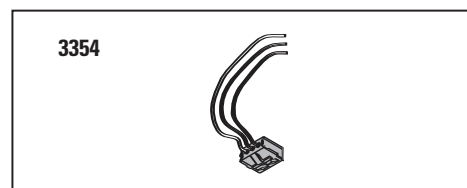

LCN 4310ME SERIES

TABLE OF SIZES

Closing power of 4314ME Series closers may be increased 15%.

→ Indicates recommended range of door width for closer size.

INTERIOR DOOR WIDTH

	26" 660mm	34" 864mm	38" 965mm	48" 1219mm
4314ME	→ size 4			
Minimum Door Width				

HOW-TO-ORDER 4310ME SERIES CLOSERS

1. SELECT CYLINDER SIZE.

☐ 4314ME

2. SPECIFY HAND.

☐ RH

☐ LH

3. VOLTAGE

☐ 24V AC/DC

☐ 120V AC/DC

4. SPECIFY FINISH.

☐ Standard Powder Coat _____
Aluminum, Dark Bronze, Statuary,
Light Bronze, Black, Brass.

Closer will be shipped with:

- STANDARD COVER,
 - SWING-FREE (SF) ARM,
 - STANDARD TRACK,
 - TRACK ROLLER,
 - WOOD & MACHINE SCREW PACK,
- unless options listed below are selected.

CLOSER OPTIONS

CYLINDER FUNCTION

☐ Bypass 80° (B80)

☐ Bypass 140° (B140)

ARM

☐ Double Egress (DE)

FINISHES

☐ Custom Powder Coat (RAL) _____

☐ Plated Finish, US _____

SCREW PACK

☐ TB*, Wood & Machine Screw (TBWMS)

☐ TORX Machine Screw (TORX)

☐ TB* & TORX Machine Screw (TBTRX)

*Specify door thickness if other than 1 3/4".

INSTALLATION ACCESSORIES

☐ Transformer, 4040SE-3210

SPECIAL TEMPLATE

☐ ST-_____