

II - M1500-18

BEST 40H SERIES ELECTRIC LOCK M1510/1520C FUNCTION CHANGE INSTRUCTIONS

TO CHANGE THE LOCKING FUNCTION FOLLOW THE BELOW INSTRUCTIONS CAREFULLY.

STEP 1: REMOVE THE 4 COVER SCREWS AND COVER

STEP 2: USING THE ILLUSTRATION BELOW, REMOVE SCREW AND REPLACE SCREW IN PROPER HOLE AS FOLLOWS


A FOR FAIL SAFE M1510C (POWER LOCK) FUNCTION

B FOR FAIL SECURE M1520C (POWER UNLOCK) FUNCTION

STEP 3: REPLACE COVER AND SCREWS. MAKE SURE SOLENOID IS PROPERLY POSITIONED IN COVER SLOT.

A INSERT SCREW HERE FOR FAIL SAFE (POWER LOCK) OPERATION

B INSERT SCREW HERE FOR FAIL SECURE (POWER UNLOCK) OPERATION

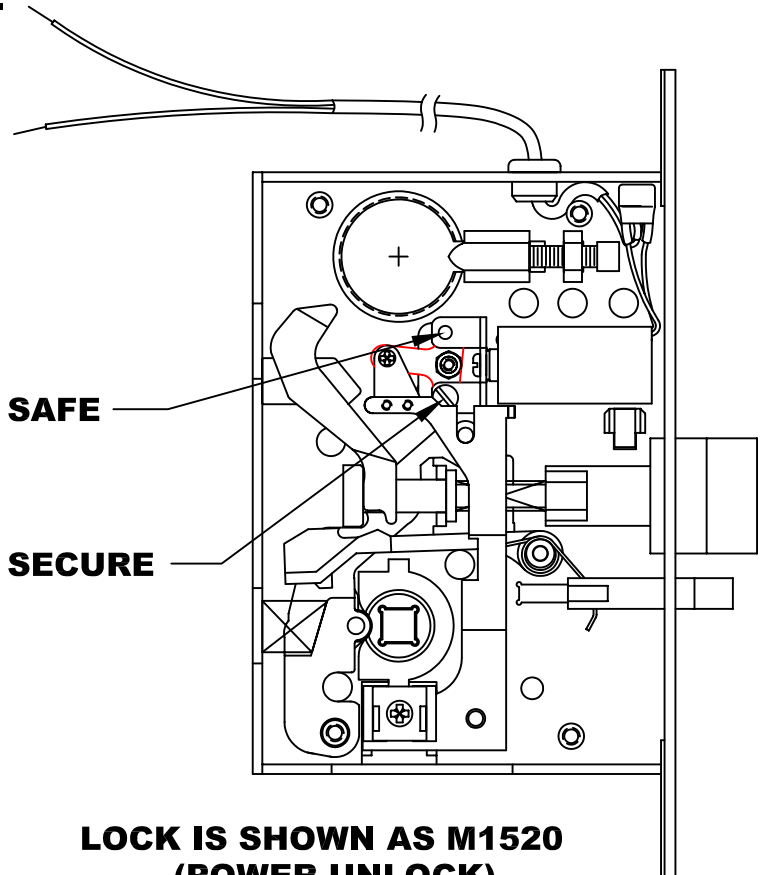

**LOCK IS SHOWN AS M1520
(POWER UNLOCK)**

