

ISN-CC1 Ceiling Mount PIR Detectors

www.boschsecurity.com



BOSCH

Invented for life



- ▶ DIP switch settings
- ▶ Mirror switch for easy adjustments to coverage patterns
- ▶ 14 m (46 ft) wide angle coverage (ISN-CC1-50W)
- ▶ 30 m (98 ft) long range coverage (ISN-CC1-100N)

The ISN-CC1 Ceiling Mount Detectors include the ISN-CC1-50W and the ISN-CC1-100N models. Both models have adjustable mirrors and sensitivity levels for flexibility.

Functions

DIP Switch Settings

Use DIP switches to select a setting for the light emitting diode (LED), relay, and sensitivity. In the ISN-CC1-50W Ceiling Mount Detector, use the DIP switch to set pulse count.

Indicators

Both detector models have one LED that emits red light when the detector activates an alarm. You can set the alarm LED to on or off. The LED flashes when power is initially applied and when the detector experiences a malfunction.


Self-Diagnosis

Both detector models monitor for technical malfunctions. The Alarm LED flashes to indicate a problem.

Certifications and approvals


Region	Certification	
USA	UL	ANSR: Intrusion Detection Units (UL639)

Installation/configuration notes

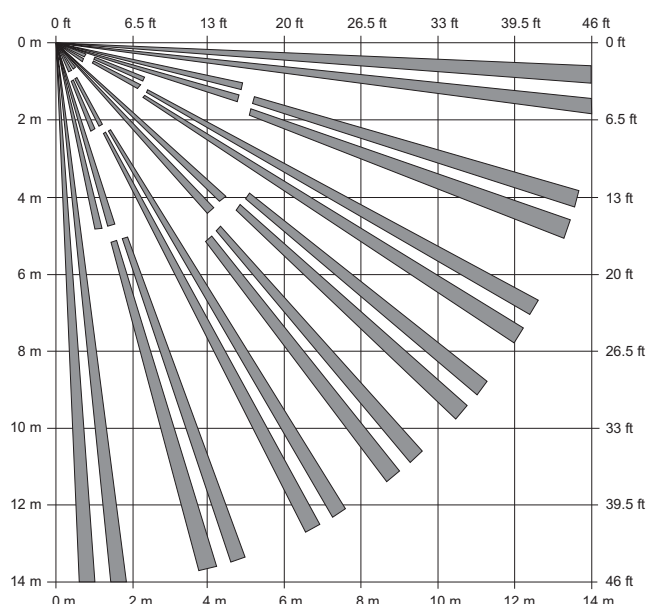


Top View

ISN-CC1-50W wide angle coverage: 14 m (46 ft) maximum range, 15 zone pairs, and 30 fingers.

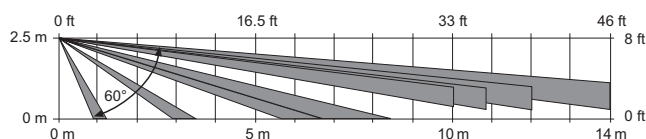


Side View

ISN-CC1-50W wide angle coverage: 14 m (46 ft) maximum range, 15 zone pairs, and 30 fingers.



Top View

ISN-CC1-100N long range coverage: 30 m (98 ft) maximum range, eight zone pairs, and 16 fingers.



Side View

ISN-CC1-100N long range coverage: 30 m (98 ft) maximum range, eight zone pairs, and 16 fingers.

Mounting Considerations

When installing the detector, mount it in a location free of rapid temperature change, vibrations, electrical or electromagnetic noise, corrosive gas and dust, sunlight, condensation, animals, and moving objects such as doors or curtains.

The recommended ceiling height is 2.5 m to 5 m (8 ft to 16 ft).

Wiring Considerations

Wire Gauge	Maximum Length
0.3 mm (22 AWG)	700 m (2250 ft)
0.5 mm (20 AWG)	1200 m (3900 ft)
0.75 mm (18 AWG)	1800 m (5900 ft)

Technical specifications

Electrical

Voltage (Supply):	9 VDC to 28 VDC, non-polarized
Current Draw:	25 mA

Environmental

Humidity:	95% RH or less, non-condensing
Temperature (Operating):	-20°C to +50°C (-4°F to +122°F)

Mechanical

Dimensions (diameter x height):	16 cm (6.3 in.) x 4.5 cm (1.8 in.)
---------------------------------	------------------------------------

Mirror Angle Adjustment

- ISN-CC1-50W: 30° vertically
- ISN-CC1-100N: 33° vertically

Weight:	190 g (6.7 oz)
---------	----------------

Outputs

Alarm:	One selectable Form 1A (NO) or Form 1B (NC) semiconductor relay. Contacts rated at 0.1 A at 30 VDC.
Tamper:	One Form 1B (NC). Contacts rated at 0.1 A at 30 VDC.

Ordering information

ISN-CC1-50W Ceiling Mount PIR Detector

14 m (46 ft) wide angle coverage and 30° vertical mirror angle adjustment.

Order number **ISN-CC1-50W**

ISN-CC1-100N Ceiling Mount PIR Detector

30 m (98 ft) long range coverage and 33° vertical mirror angle adjustment.

Order number **ISN-CC1-100N**

Represented by:

Americas:

Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
security.sales@us.bosch.com
www.boschsecurity.us

Europe, Middle East, Africa:

Bosch Security Systems B.V.
P.O. Box 80002
5617 BA Eindhoven, The Netherlands
Phone: + 31 40 2577 284
Fax: +31 40 2577 330
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific:

Robert Bosch (SEA) Pte Ltd, Security
Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6571 2808
Fax: +65 6571 2699
apr.securitysystems@bosch.com
www.boschsecurity.asia

China:

Bosch (Shanghai) Security Systems Ltd.
201 Building, No. 333 Fuquan Road
North IBP
Changning District, Shanghai
200335 China
Phone +86 21 22181111
Fax: +86 21 22182398
www.boschsecurity.com.cn

America Latina:

Robert Bosch Ltda Security Systems Division
Via Anhanguera, Km 98
CEP 13065-900
Campinas, Sao Paulo, Brazil
Phone: +55 19 2103 2860
Fax: +55 19 2103 2862
latam.boschsecurity@bosch.com
www.boschsecurity.com