



## USB to Serial Converter TU-S9 (v2.0R)

This USB to Serial converter allows you to connect a RS-232 serial device such as a modem to a USB port on your Desktop or Laptop PC.

### PRODUCT OVERVIEW

- Connect a RS-232 serial device such as a modem to a USB port on your computer
- Easy installation with Universal Plug and Play (UPnP)
- Supports multiple operating systems

### FEATURES

- USB 1.1 Specifications
- RS-232 serial interface
- Supports data rate up to 6 Mbps
- Detects USB suspend condition
- Compliant with **Windows 8.1, Windows 8, Windows 7, Vista, XP, 2000, ME, 98SE** and **Mac OS 10.1~10.9**
- Install as a standard Windows COM port, full RS-232 modem control signals, RS-232 data signals; TxD, RxD, RTS, CTS, DSR, DTR, DCD, RI, GND
- Provides dual buffers for upstream and downstream data transfer
- Supports automatic handshake mode
- Powered by USB port, no external power adapter required.
- Easy Plug and Play installation
- 2-years limited warranty




## SPECIFICATIONS

### HARDWARE

<b>Interface</b>	<ul style="list-style-type: none"><li>• USB 1.1 Type A</li><li>• RS-232 (9-pin) male</li></ul>
<b>Supported OS</b>	<ul style="list-style-type: none"><li>• Windows 8.1 (32/64-bit), 8 (32/64-bit), Windows 7 (32/64-bit), Vista (32/64-bit), XP (32/64-bit), 2000, ME, 98SE</li><li>• Mac OS 10.1~10.9</li></ul>
<b>Cable Length</b>	<ul style="list-style-type: none"><li>• 60 cm (24 inches)</li></ul>
<b>Cable Gauge</b>	<ul style="list-style-type: none"><li>• 28/24 AWG</li></ul>
<b>Data Rate</b>	<ul style="list-style-type: none"><li>• 6 Mbps</li></ul>
<b>Power Consumption</b>	<ul style="list-style-type: none"><li>• 500 mA (max)</li></ul>
<b>Weight</b>	<ul style="list-style-type: none"><li>• 40 g (1.4 oz)</li></ul>
<b>Temperature</b>	<ul style="list-style-type: none"><li>• Operating: 0° ~ 40° C (32° ~ 104° F)</li><li>• System: -10° ~ 45° C (14° ~ 113° F)</li></ul>
<b>Humidity</b>	<ul style="list-style-type: none"><li>• Max 85% (non-condensing)</li></ul>
<b>Certifications</b>	<ul style="list-style-type: none"><li>• CE, FCC</li></ul>

## NETWORKING SOLUTIONS

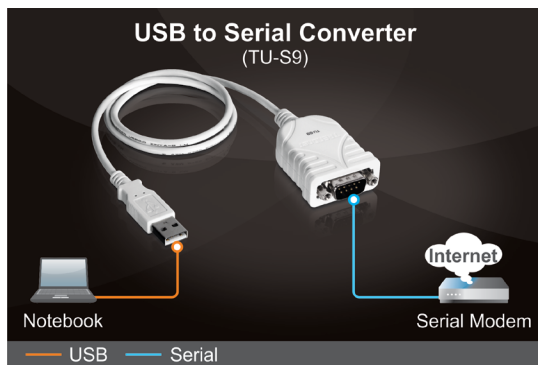

## PACKAGE CONTENTS

TU-S9

Quick Installation Guide

CD-ROM (Driver and User's Guide)

## RELATED PRODUCTS

TU2-700	7-Port High Speed USB Hub w/ Power Adapter
TU2-400E	4-Port USB Hub
TU2-EX12	12-Meter USB 2.0 Extension Cable

## CONTACT INFORMATION

**TRENDnet**

20675 Manhattan Place, Torrance, CA 90501 USA

Tel: 1-310-961-5500

Fax: 1-310-961-5511

Web: [www.trendnet.com](http://www.trendnet.com)

Email: [sales@trendnet.com](mailto:sales@trendnet.com)

**1-888-326-6061**

