


DATA SHEET

COD. **5724C**

SIMPLEBUS COLOUR BRACKET FOR HANDSFREE BRAVO MONITOR

Bracket for digital Simplebus colour system required to complete the Bravo hands-free version monitor. The video door entry monitor is complete with privacy of speech. The standard pushbuttons on the monitor take on the function of door open pushbutton, porter switchboard call or free pushbutton (C/N.O.) and internal lighting pushbutton or video request. It manages the local floor call and call repetition as standard. Complete with DIP SWITCH with 8 positions for programming the user code. Addition of the pushbutton card art. 5733 allows availability of 4 supplementary pushbuttons. All the pushbuttons can be programmed by means of programmer art. 1251/A which allows the various functions to be set. Fitted with branch terminal art. 1214/2C.

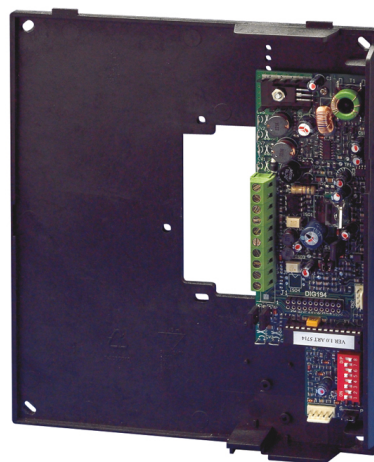

Functions

| | |
|--------------------------------|-----|
| Privacy function: | Yes |
| Automatic gain control (AGC): | Yes |
| Alarm function: | No |
| Switchboard call function: | Yes |
| Floor door call function: | Yes |
| Actuator control function: | Yes |
| Privacy conversation function: | Yes |
| Intercom function: | No |

General info

| | |
|-----------------------------|---------------|
| Product height (mm): | 197 |
| Product width (mm): | 169 |
| Operating temperature (°C): | -5/55 |
| Self-ignition: | Yes |
| EAN product code: | 8023903194470 |
| Intrastat code: | 85176910 |
| Customisable ringtone: | Yes |

Compatibility

| | |
|-------------------------|-----|
| Simplebus Color system: | Yes |
|-------------------------|-----|

Audio/video specifications

| | |
|---------------------|-----|
| Audio system: | No |
| Audio/video system: | Yes |

Electrical specifications

| | |
|----------------------------------|-----|
| Maximum current absorption (mA): | 160 |
|----------------------------------|-----|

DATA SHEET

Packaging

| | |
|---------------------------|-------|
| Single pack height (mm): | 30 |
| Single pack width (mm): | 210 |
| Single pack weight (Kg): | 0,375 |
| Single pack depth (mm): | 170 |
| Single pack volume (dm3): | 1,071 |