

MODEL 8012

RELAY



SPECIFICATIONS

- D.P.D.T. CONTACTS, 2 FORM C
- CONTACTS RATED 3A @ 28 VDC
- PLUGS INTO 8007, 8007AC AND 8007S RELAY BASE
- OPERATES ON TWELVE VOLTS DC
- MINIMUM OPERATING VOLTAGE 9.6 VDC
- MAXIMUM OPERATING VOLTAGE 14.4 VDC
- COIL RESISTANCE 1000 OHMS
- TEMPERATURE RANGE -55DEG C TO +75 DEG C
- SIZE 1" H x .87" L x .75" W
- U.L. RECOGNIZED RELAY



ALARM CONTROLS CORPORATION

19 BRANDYWINE DRIVE P.O. BOX 280


DEER PARK, NY 11729

1 631 586-4220 1 800 645-5538

WWW.ALARMCONTROLS.COM EMAIL INFO@ALARMCONTROLS.COM

RELAY TERMINAL DESIGNATION FOR MODELS 8006, 8012 AND 8024

BOTTOM VIEW OF RELAY

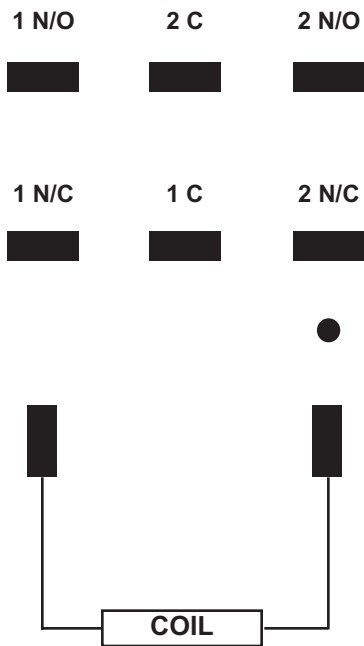

ALARM CONTROLS CORPORATION
DEER PARK, NY 11729