



# 9700 Series

The stylish  
**windstorm-  
rated and fire-  
rated, square  
bolt solution**

The 9700 Series is a heavy duty, surface mounted electric strike designed to accommodate Corbin Russwin SecureBolt™ and Yale SquareBolt® exit devices. All components are completely encased within its 3/4" thick stainless steel housing, so no cutting on the frame is required for installation. It is field selectable for fail secure or fail safe operation, and for 12 or 24 VDC.

The 9700 is designed with the strength and durability required to exceed the severe forces of ANSI Windstorm testing. This unique electric strike also complies with NFPA 80-07 guidelines for retrofit into fire-rated frames.

## Specifications

- UL listed to ANSI 250.13-2003 Severe windstorm listed
- UL 10C fire-rated, 3 hour (fail secure only)
- CAN4-S104 (ULC-S104), NFPA-252 and ASTM-E152 fire door conformant
- California Fire Marshall listed
- NFPA 80-07 compliant
- Florida Building Code Approved (FL#19224)
- UL 1034 burglary-resistant listed and suitable for outdoor use
- UL 294 (6th Edition) listed
- ANSI/BHMA A156.31 Grade 1
- RoHS compliant
- Patents: 6,390,520; 8,454,063 and patent pending

## Frame Application


- Metal
- Wood

## Electrical (continuous duty)

- .45 Amps at 12 VDC
- .25 Amps at 24 VDC

## 9700 Models

9700	Universal electric strike	
RF-9700	Integrated Prox	Includes the strike body, Prox reader and door position switch
IC-9700	Integrated iCLASS®	Includes the strike body, iCLASS reader and door position switch

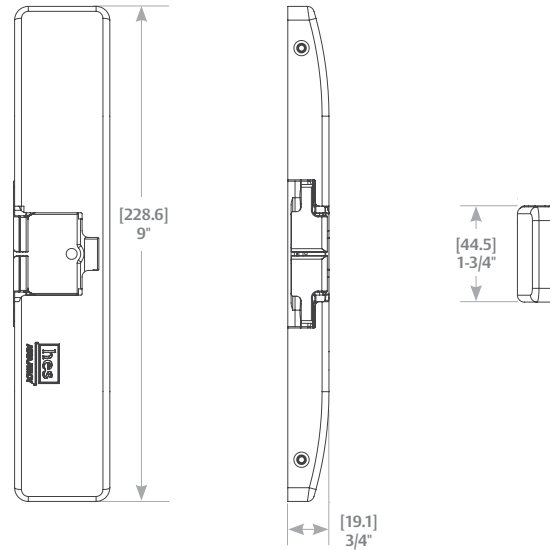

### Standard Features

- Installs in metal or wood
- Wood screws not provided
- Separate base and decorative cover for easy adjustments
- Stainless steel construction
- Tamper-resistant
- Static strength to 2,000 lbs.
- Dynamic strength to 120 ft-lbs.
- Endurance 1,000,000 cycles
- Field selectable fail secure/fail safe
- Dual-voltage 12 or 24 VDC
- Horizontal adjustment
- Non-handed
- Internally mounted solenoid
- Five year limited warranty

### Optional Features

**LBM** » Latchbolt monitor

**LBSM** » Latchbolt strike monitor

### Accessories

**9000-108** » Spacer plate (black or 630 finish)

**9000-MTK** » Metal template kit

**SMB** » Surface mounting box

**2001M** » Plug-in bridge rectifier

**2004M** » ElectroLynx® adapter

**2005M3** » SMART Pac® III

**2006M** » Plug-in buzzer

### Finishes

**630** » Satin stainless steel

**605** » Bright brass

**606** » Satin brass

**612** » Satin bronze

**613** » Bronze toned

**613E** » Dark oxidized satin bronze

**629** » Bright stainless steel



RIM EXIT  
DEVICES



FIELD SELECTABLE  
(12 OR 24VDC)



FIELD SELECTABLE  
(FAIL SECURE /  
FAIL SAFE)



FIRE RATED



GRADE 1



OUTDOOR  
RATED



UL 1034  
BURGLARY  
LISTED



ANSI A250.13-2003  
WINDSTORM  
RESISTANT

