





Safety Technology International, Inc.
2306 Airport Road • Waterford, Michigan 48327-1209
Phone: 248-673-9898 • Fax: 248-673-1246
Toll Free: 800-888-4784 • E-mail: info@sti-usa.com
Web: www.sti-usa.com

Safety Technology International (Europe) Ltd.
Unit 49G Pipers Road • Park Farm Industrial Estate • Redditch
Worcestershire • B98 0HU • England • Tel: 44 (0) 1527 520 999
Fax: 44 (0) 1527 501 999 • Freephone: 0800 085 1678 (UK only)
E-mail: info@sti-europe.com • Web: www.sti-europe.com

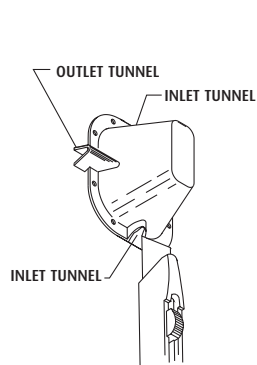


1

SELECT THE INLET TUNNEL TO BE USED, AND CAREFULLY CUT A SECTION OF THE TUNNEL WALL TO BE USED FOR WIRE ACCESS.




3


LEAVE APPROXIMATELY 1 INCH OF WIRE EXPOSED AS SHOWN

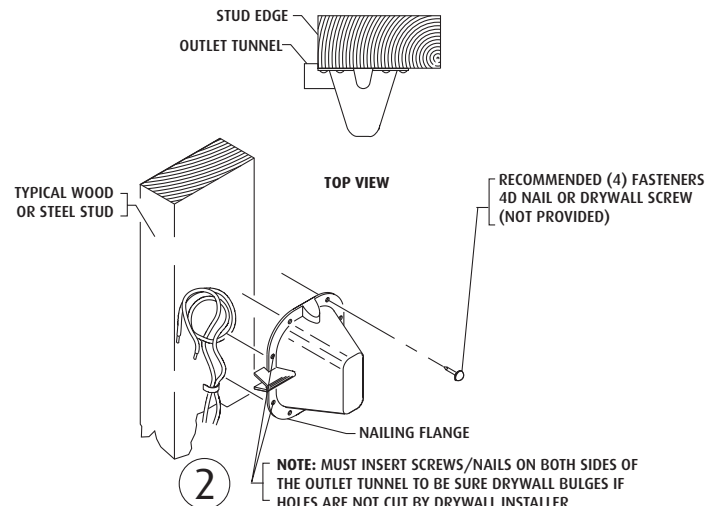

ROUTE WIRES UP STUD LENGTH TO SELECTED HEIGHT. COIL AND SECURE WIRES AS SHOWN. PLACE THE LOW VOLTAGE OUTLET HOUSING OVER COILED WIRES. MAKE SURE OUTLET TUNNEL IS BUTTED AGAINST STUD EDGE AND NO WIRES ARE PINCHED BETWEEN STUD AND NAILING FLANGE. SECURE HOUSING WITH EITHER SCREWS OR NAILS.

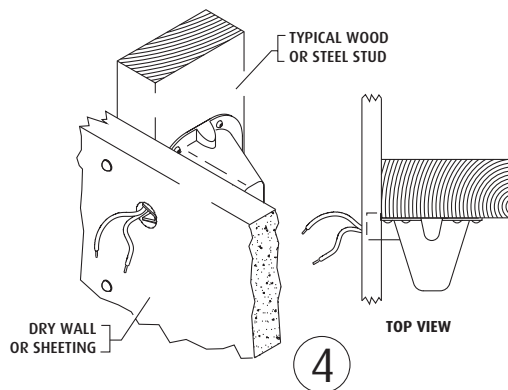

4

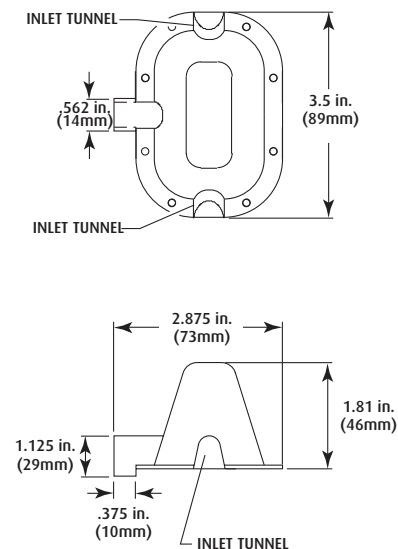

PRODUCT DIMENSIONS

Electronic warranty form at www.sti-usa.com/wc14

INSTALLATION OF STI-9745 LOW VOLTAGE SPLICE BOX

All specifications and information shown were current as of publication and are subject to change without notice.

9745IS MAY2006

