



UTP Passive Video Balun Hub



ACCBH16

The **ACCBH16** UTP Passive Video Hub allows the use of ordinary Unshielded Twisted Pair (UTP) cable in the place of costly and bulky coaxial cable to transmit video up to 2000 feet*. The **ACCBH16's** unique tool-less design makes installation a snap. Exceptional interference rejection allows video, power and data to share the same cable. The **ACCBH16** can accommodate up to 16 channels in a compact 1U rackmount design. Integrated surge suppression protects equipment from voltage spikes.

It supports NTSC, PAL and SECAM formats and is ideal for use with CCTV equipment such as CCTV cameras, monitors, switchers, multiplexers, VCRs and DVRs.

The **ACCBH16** is designed to use in conjunction with either single channel baluns or another multi-port hub such as the **ACCBH16**. Sixteen 30 inch cables are included with each **ACCBH16**.

Features:

- Transmits video Up to 2000 feet*
- No tools required/installs in minutes
- Surge protected
- Sixteen 30 inch cables Included
- No Power Required
- 16 Ports, compact and rack-mountable
- UL Listed for the U.S. and Canada
- Limited Lifetime Warranty

Applications:


- Commercial and Industrial Security
- Government and Military
- Law Enforcement
- Intelligent Transportation Systems (ITS)
- Casino Surveillance Systems
- Airport Security Systems




Easy Installation:



Raise flip up cover

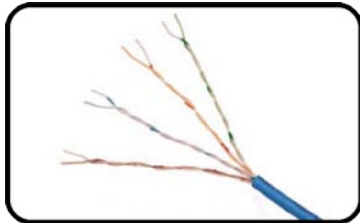

Insert wires

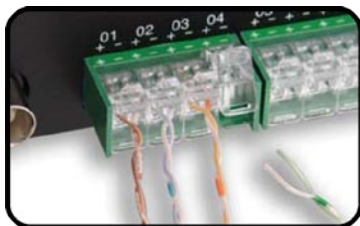



Close Cover



Ready to use in only minutes

Specifications:

Video	Bandwidth	DC to 6 MHz
	Format	NTSC, PAL, SECAM
	Common Mode Rejection	60 dB
	Frequency range	from 15KHz to 5MHz
	Insertion Loss	<2 dB
Distance	Using Cat 5 cable	Up to 2000'*
Wire	Unshielded Twisted Pair	Cat 2, 3, 5 or better
	Gauge	22 to 28 solid wire
Impedance	BNC Connector Side	75 ohms (unbalanced)
	UTP Connector Side	100 ohms (balanced)
Environment	Temperature: Operating	0 to +55 C
	Temperature: Storage	-20 to +75 C
	Humidity	0 to 95%
Mechanical	Size (LxWxH in inches)	18.95 x 6.5 x 1.75
	Mounting	Rackmount

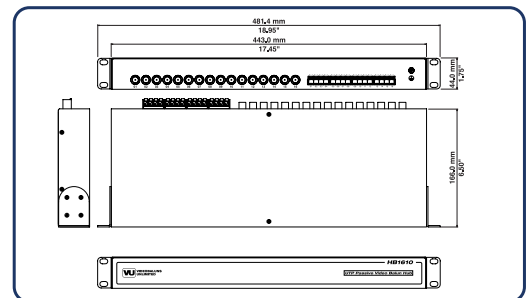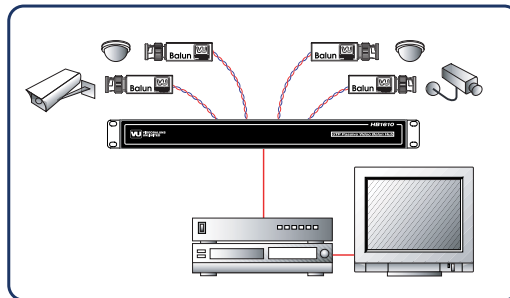

Product Information:

UPC:	8-41430-00544-5
Package Weight:	1.22kg / 2.69lbs
Package Dimensions: (W x D x H)	508mm x 229mm x 127mm 20.0" x 9.0" x 5.0"
Package Cube:	0.015m / 0.527ft

* See installation guide for more information - Distance may vary depending on cable quality