

# Black Diamond SuperLED Illuminator

www.boschsecurity.com



**BOSCH**

Invented for life



SuperLED powered by Black Diamond technology is the industry's first LED infrared illuminator designed to deliver High-Fidelity performance in today's digital world.

Black Diamond optimises the function of integrated digital security systems in low-light and no-light conditions. Surpassing the capabilities of conventional IR illuminators, Black Diamond SuperLED's Even Illumination lights the foreground and background of an entire scene eliminating hotspots and underexposure on scene for an unrivalled night time image.

## Functions

### High-Fidelity Light

- Delivers superior night vision image quality
- Enables proper function of video analytics at night
- Reduces signal noise and other image distortions
- Reduces network bandwidth requirements
- Reduces image lag and dropped frames

### Asymmetric Optics

- Increases infrared illumination range
- Produces Cosec2 Even Illumination for photonically balanced quality

- ▶ Even Illumination balances foreground and background for outstanding image quality
- ▶ Micro-refraction lens technology dramatically increases both the range and horizontal beam of illumination
- ▶ Provides up to 300 m (982 ft) of infrared illumination for increased range of surveillance
- ▶ Delivers up to 135° horizontal beam widths for complete area coverage
- ▶ Superior light management increases operational efficiency, reducing wasted light to zero and minimising power consumption

- Eliminates hotspots and foreground overexposure
- Eliminates background underexposure


### Micro-refraction Lens

- Optimises performance of PTZ and speed domes
- Enables wide beam patterns: 60°, 95°, 135° for broad area coverage
- Reduces number of units required to effectively illuminate a scene
- Reduces customer equipment costs
- Minimises installation and wiring costs

### Superior Light Management


- Increases achievable illumination range
- Delivers high-efficiency operation by reducing wasted light to zero
- Reduces power consumption
- Reduces number of units required to effectively illuminate a scene

### Installation/Configuration Notes

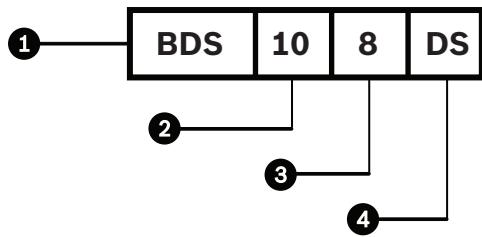

1	Model	BDS	Black Diamond SuperLED
2	Beam Pattern	10	10°
		20	20°
		30	30°
		60	60°
		95	95°
		135	135°
3	Wavelength	850	850 nm
4		DS	

### Dimensions

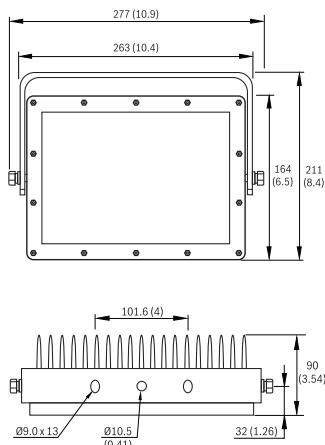

mm (in)

### Technical Specifications

LEDs	560 LED current limited array with Black Diamond technology
Beam Patterns	10°, 20°, 30°, 60°, 95°, 135°
Wavelength	850 nm
Life	Greater than 5 years
Power consumption	120 W nominal on full power (external) 80 W nominal on low power (internal applications)
Temperature Range	-50 °C to +50 °C (-58 °F to +122 °F) max on full power
Environmental	IP67

Construction	Robust, aluminum construction with acrylic front fascia
Weight	4.2 kg (9.3 lb)
Dimensions	277 x 212 x 90 mm (10.9 x 8.3 x 3.5 in)
Colour	Black anodised heat sink with black front fascia
Power Cable	Supplied with 4 m (13 ft) of connecting lead
Bracket	Wall mount U-bracket supplied

### Performance Ranges

Model	Beam Pattern	Achievable Distance*	HOV
BDS10-8DS	10°	300 m (985 ft)	42 m (138 ft)
BDS20-8DS	20°	200 m (660 ft)	70 m (230 ft)
BDS30-8DS	30°	160 m (525 ft)	85 m (280 ft)
BDS60-8DS	60°	110 m (360 ft)	130 m (425 ft)
BDS95-8DS	95°	90 m (295 ft)	200 m (655 ft)
BDS135-8DS	135°	56 m (185 ft)	270 m (885 ft)

\*Actual illumination distance achieved is dependent on camera and lens characteristics.

### Power Supply (included)

Input	85 to 265 VAC (switch mode PSU)
Output	16.2 V at 5.6 A nominal, 12 V at 0.3 A auxiliary
Photocell	Automatic On/Off photocell included, remote photocell option available, part code RP15
Construction	Cast, aluminium IP66 rated
Color	Gray (RAL 7035)
Environmental	IP66
Dimensions	280 x 180 x 100 mm (11.0 x 7.1 x 3.9 in)
Weight	3.8 kg (8.4 lb)

### Ordering Information

#### BDS10-8DS SuperLED Illuminator

High-Fidelity illumination, 10°, 850 nm, includes enhanced features PSU  
Order number **BDS10-8DS**

#### BDS20-8DS SuperLED Illuminator

High-Fidelity illumination, 20°, 850 nm, includes enhanced features PSU  
Order number **BDS20-8DS**

**BDS30-8DS SuperLED Illuminator**

High-Fidelity illumination, 30°, 850 nm, includes enhanced features PSU  
Order number **BDS30-8DS**

**BDS60-8DS SuperLED Illuminator**

High-Fidelity illumination, 60°, 850 nm, includes enhanced features PSU  
Order number **BDS60-8DS**

**BDS95-8DS SuperLED Illuminator**

High-Fidelity illumination, 95°, 850 nm, includes enhanced features PSU  
Order number **BDS95-8DS**

**BDS135-8DS SuperLED Illuminator**

High-Fidelity illumination, 135°, 850 nm, includes enhanced features PSU  
Order number **BDS135-8DS**

**Represented by:**

**Americas:**

Bosch Security Systems, Inc.  
130 Perinton Parkway  
Fairport, New York, 14450, USA  
Phone: +1 800 289 0096  
Fax: +1 585 223 9180  
security.sales@us.bosch.com  
www.boschsecurity.us

**Europe, Middle East, Africa:**

Bosch Security Systems B.V.  
P.O. Box 80002  
5617 BA Eindhoven, The Netherlands  
Phone: +31 40 2577 284  
Fax: +31 40 2577 330  
emea.securitysystems@bosch.com  
www.boschsecurity.com

**Asia-Pacific:**

Robert Bosch (SEA) Pte Ltd, Security Systems  
11 Bishan Street 21  
Singapore 573943  
Phone: +65 6571 2808  
Fax: +65 6571 2699  
apr.securitysystems@bosch.com  
www.boschsecurity.asia

**China:**

Bosch (Shanghai) Security Systems Ltd.  
201 Building, No. 333 Fuquan Road  
North IBP  
Changning District, Shanghai  
200335 China  
Phone: +86 21 22181111  
Fax: +86 21 22182398  
www.boschsecurity.com.cn

**America Latina:**

Robert Bosch Ltda Security Systems Division  
Via Anhanguera, Km 98  
CEP 13065-900  
Campinas, Sao Paulo, Brazil  
Phone: +55 19 2103 2860  
Fax: +55 19 2103 2862  
al.securitysystems@bosch.com  
www.boschsecurity.com