

EXIT WATCH™

COVERT DOOR FRAME, HIGH RESOLUTION COLOR CAMERAS

FEATURES

- VANDAL RESISTANT ALUMINUM CASING. CLEAR ALUMINUM OR DARK BRONZE
- ADVANCED HIGH RESOLUTION -550 TVL CCD BOARD CAMERA
- 1 LUX @ F:2/50 IRE

- 12V REGULATED DC POWER SUPPLY AND MOUNTING HARDWARE INCLUDED
- RCA & BNC PLUG & PLAY CONNECTORS INCLUDED

APPLICATION

Exit Watch covert door frame cameras are installed on the door frame of the exit door, which is the ideal location to capture close-up and clear video images. To all appearances, the unit is a typical height strip you would see anywhere. **Perfect for use in banks, restaurants, filling stations and other retail applications.**

DESCRIPTION

The high quality optical lens and ultra-small high resolution CCD camera makes Exit Watch one of the most advanced units available. The heavy duty, dark brown or silver steel case and back-screened multi-color faceplate are designed to keep the units looking new by protecting it in high traffic areas.

The adjustable/lockable swivel bracket mounts directly to the door frame, enabling Exit Watch to be precisely adjusted for single or double door applications. Exit Watch provides clear and distinct images to law enforcement agencies for identification needs.

The compact EX-7 (6.5" long) can be mounted on either the door frame or over the door (horizontally).

Exit Watch kit includes mounting hardware and 12V DC regulated plug-in power transformer.





CV-EX7

CV-EX36




5502 Timberlea Blvd. Mississauga, ON Canada L4W 2T7 • Toll Free: 1 877 226-3369 (CAMDEN9) Tel: (905) 366-3377 • Fax: (905) 366-3378 • E-mail: info@camdencontrols.com • www.camdencontrols.com

EXIT WATCH ™ COVERT DOOR FRAME, HIGH RESOLUTION COLOR CAMERAS

SPECIFICATIONS


IMAGE DEVICE	SONY 1/3" HIGH RESOLUTION SUPER HAD CCD (752H X 582V)
SCANNING SYSTEM	2 : 1 INTERLACE
RESOLUTION	HORIZONTAL 550 TV LINES
SHUTTER CONTROL	AUTO 1/60 – 1/100,000
ELECTRONIC SHUTTER	BUILT-IN
LENS	3.7 MM
MINIMUM ILLUMINATION	1.0 LUX (F:2.0) / 50 IRE
WHITE BALANCE	AUTO
GAIN CONTROL	AUTO
BACKLIGHT COMPENSATION	AUTO
OUTPUTS/CONNECTIONS	VIDEO - RCA, POWER DC JACK
POWER REQUIREMENTS	12V DC POWER SUPPLY (INCLUDED)
OPERATING TEMPERATURE	14 °F – 122 °F (-10 °C – 50 °C)
FINISH	DARK BROWN OR SILVER BAKED PAINT



CV-EX7

MODEL DESCRIPTION CV-EX36 COLOR 550 TVL, 3.7MM LENS, MIN. ILLUM. 1 LUX @ F:2.0, DARK BROWN CASE CV-EX36S COLOR 550 TVL, 3.7MM LENS, MIN. ILLUM. 1 LUX @ F:2.0, WITH SILVER (ALUMINUM) FINISH CV-EX7 MINI CAM, COLOR 550 TVL, 3.7MM LENS, MIN. ILLUM. 1 LUX @ F:2.0, WITH SILVER (ALUMINUM) FINISH CV-EX7 MINI CAM, COLOR 550 TVL, 3.7MM LENS, MIN. ILLUM. 1 LUX @ F:2.0, DARK BROWN CASE CV-EX7S MINI CAM, COLOR 550 TVL, 3.7MM LENS, MIN. ILLUM. 1 LUX @ F:2.0, WITH SILVER (ALUMINUM) FINISH



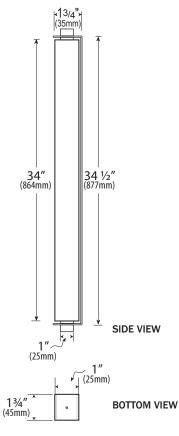





 5502 Timberlea Blvd. Mississauga, ON Canada L4W 2T7 • Toll Free: 1 877 226-3369 (CAMDEN9)

 5

 Tel: (905) 366-3377 • Fax: (905) 366-3378 • E-mail: info@camdencontrols.com • www.camdencontrols.com

 LIT-SP-CV7&36

