

CX-1000/75

CX-1000/75 MINIMINDER

FEATURES

- ADJUSTABLE DELAY FROM 1-120 SECONDS
- ULTRA COMPACT DESIGN
- 12 - 24 VOLTS DC
- SPDT CONTACTS RATED AT 3 AMPS @ 24V DC
- ACCEPTS N.O. DRY INPUTS
- MOUNTING: SUPPLIED WITH DOUBLE-SIDED FOAM TAPE
- TURN POTENTIOMETER CLOCK-WISE TO INCREASE TIME; COUNTER CLOCK-WISE TO DECREASE TIME

DESCRIPTION


Camden Door Controls CX-1000/75 MiniMinder Is a basic easy-to-operate delay on release timer. The delay is adjustable from 1 to 120 seconds, and is accessed by a potentiometer on the board. The Form C relay output is rated at 3 amps @ 24V DC. The input must be a momentary dry contact such as a push or exit switch.

APPLICATION

The MiniMinder is ideal for (de) energizing an electric strike or electromagnet for an adjustable time period. It is also suitable for automatic door operators that do not have built in time delays.

The compact design makes the relay ideal for installations where space is at a premium, for example within the switch box itself.

TYPICAL APPLICATION

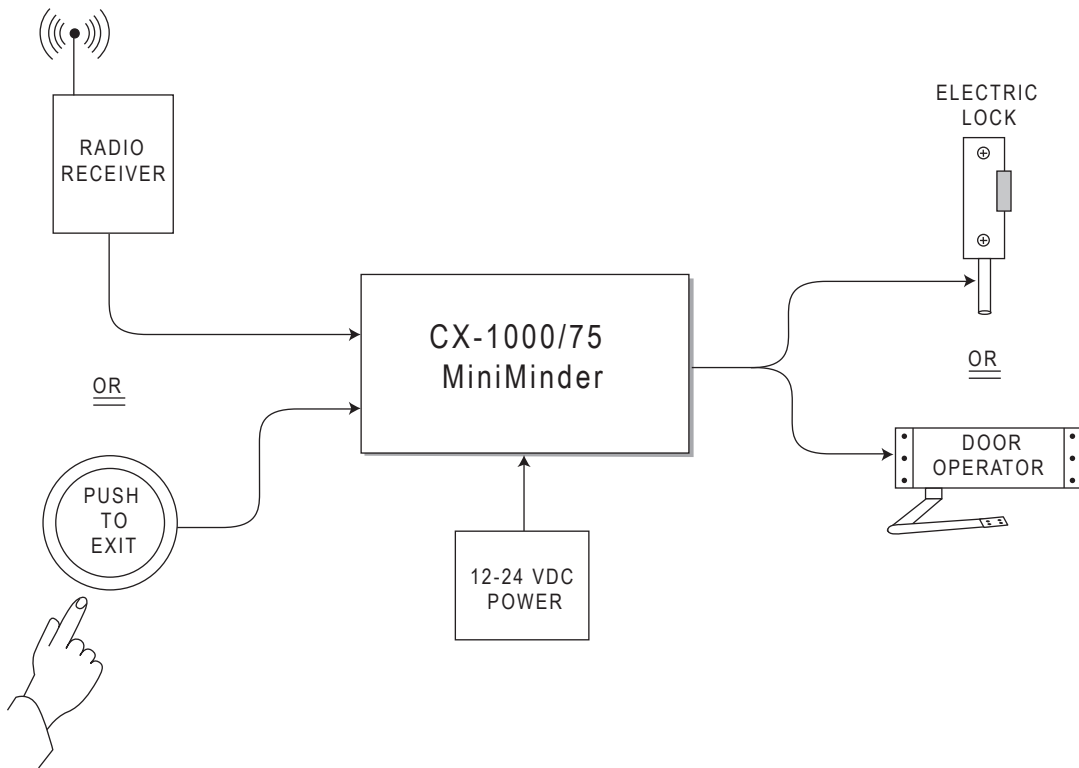

SPECIFICATIONS

DIMENSIONS:	2.7"H x 0.8" W x 1/2" D (69mm x 20mm x 13mm)
MOUNTING:	DOUBLE SIDED FOAM TAPE
ENCLOSURE:	NONE
OPERATING VOLTAGE:	12 - 24 VOLTS DC
CURRENT DRAW:	10 MA IDLE, 40 MA OPERATING
RESPONSE TIME:	0.3 SECONDS
INPUT:	N.O. DRY CONTACT
RELAY OUTPUT:	FORM 'C' (SPDT)
CONTACT RATING:	3 AMPS @ 24V DC
ELECTRICAL LIFE:	100,000 @ RATED CAPACITY
TIME DELAY:	1 - 120 SECONDS

