


DESCRIPTION



The DP38-CI DoorBell Fon **Inbound Relay Trigger Controller** module will give you 0.6 to 3 seconds dry-closure when the Door Station button is pushed. This add-on module will allow your doorbell or any other external trigger devices to be activated along side your phone. This module does not provide power to external devices. It connects an external power source through the dry-closure on the module, which can connect to the external device.

FEATURES

- The mounting bracket allows the DP38-CI to be mounted in any structured wiring cabinet or even on the wall (see UM38-SB cutsheet)
- The DP38-CI activates any external trigger device (e.g. doorbells/chimes, cameras, or lights) while the DP38-C is ringing your phones
- Dipswitch allows for different delay times
- Simple installation: just patch on to existing DP38-C and optional DP38-SW

APPLICATIONS

- Doorbells and melodic chimes
- Cameras and camera switchers
- Exterior lights
- Strobe lights (for the hearing impaired)

SPECIFICATIONS

Power:



- 12VDC/1A power supply (included)

Fuse:


- 1 Amp, 250 V, GFE

Dimensions:

- 5.8125" x 2" x 0.875"
- 6" x 2.188" x 1.750" (w/ dust cover)
- 6.875" x 2" (base w/ butterfly clips)

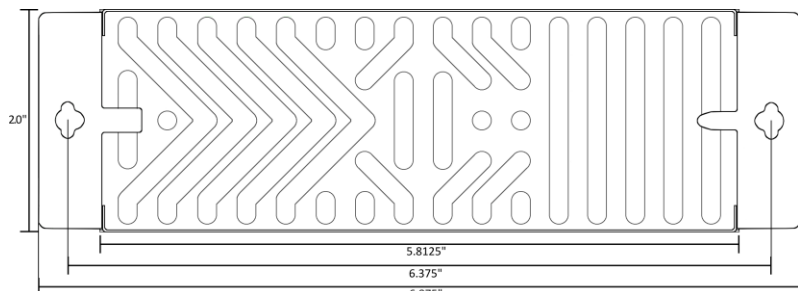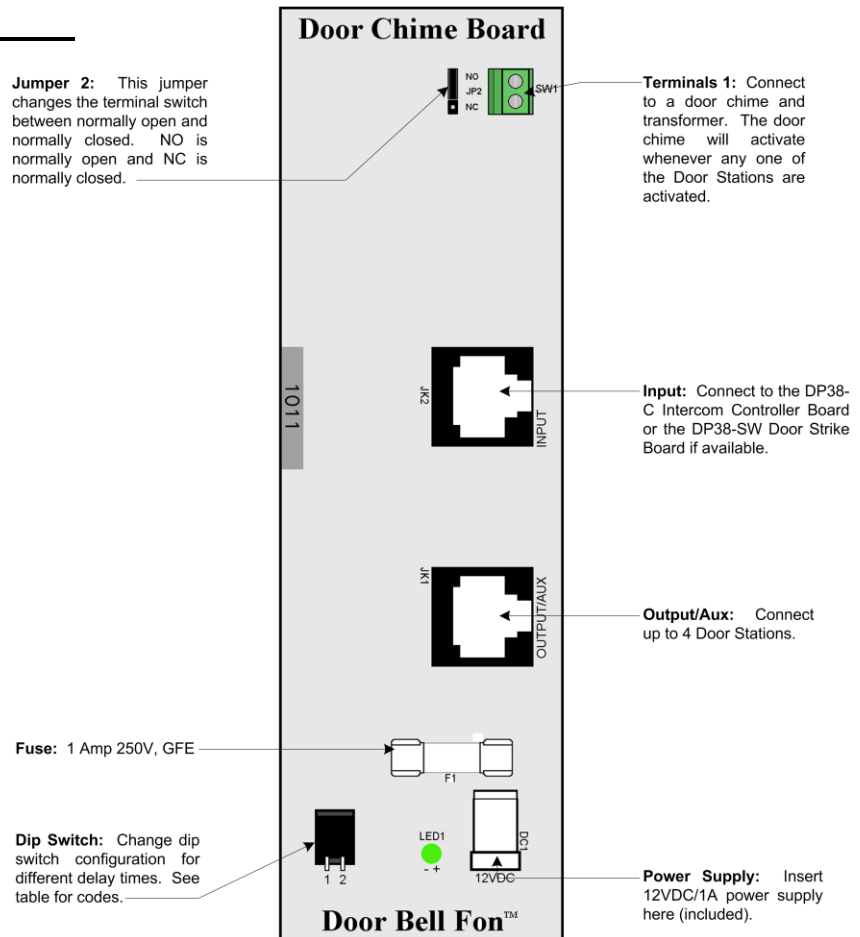

WIRING PROCEDURES

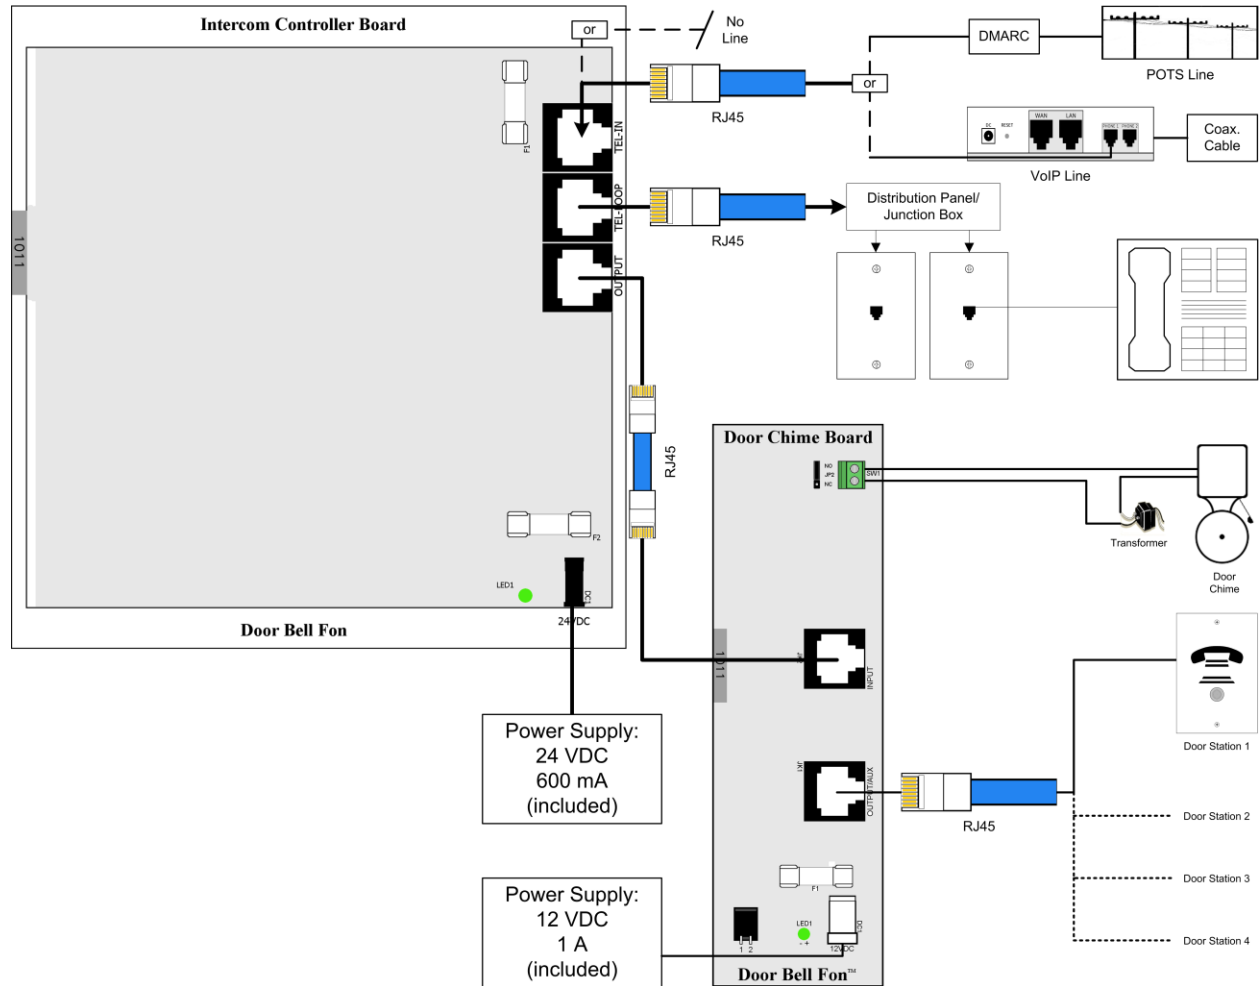

Dipswitch Table

Delay Time (seconds)	Switch 1	Switch 2
3	0	0
1	0	1
2	1	0
0.6	1	1

0 = up
1 = down

Installation notes:

- If using both the DP38-SW and DP38-CI, the DP38-C is connected directly to the DP38-SW first. The DP38-SW is then connected to the DP38-CI.
- Before making any setting changes, please power down all units.