

DP38-NxM

Door Station (M-Series)

DESCRIPTION







DP38-NBKM Black M&S size



DP38-NBZMBronze N&S size



DP38-NSMAluminum M&S size

The M-Series Door Station models include DP38-NBM, DP38-NBKM, DP38-NBZM, and DP38-NSM. These units provide standard door-to-phone communication when used with the DP28-C*. A new design not only brings great new looks, but great new additions as well. A discrete slot is available for an optional third-party 14mm pinhole camera and the weather-proof back box provides quality protection and durability for your unit. All M-Series Door Stations mount into any standard Music and Sound's box as a flush mount. Optional back boxes (DP38-BXMF and DP38-BXMS) are available as both flush and surface mounts. Colors are available in 4 anodized finishes: brass, black, bronze, and aluminum. These Door Stations are also available in kits with the DP28-C as the DP38-BM, DP38-BKM, DP38-BZM, and DP38-SM.


*DP28-C not included

FEATURES

- Manufactured in aluminum with anodized Brass, Black, Bronze, and Aluminum finishes
- Mount into any standard Music and Sound's box as a flush mount
- Optional surface mount back boxes (DP38-BXMF and DP38-BXMS) mount easily on almost any surfaces including fences and gates
- All back boxes are manufactured in steel with black powder-coating finish and provides superior protection from the elements
- No external power required: power drawn from connected Door Station Controller (DP28-C)
- LED button lights up when the Door Station is active
- Discrete slot available for optional 3rd party cameras

APPLICATIONS

- Communicate with people at a door, gate, or any other entrance way where Door Station is present
- Can be placed at:
 - o Front/Rear Entrances o Secured Facilities
 - o Remote Entryways o Senior Housing
 - o Marine Docks o Disabled Housing
 - Delivery Docks o Apartment Complex
- Use in conjunction with the DP29-CI to activate external trigger devices (e.g. door chimes, cameras, lights...) with the Door Station



- Use in conjunction with the DP29-SW to open electronically locked doors or gates with the phone
- Use in conjunction with the DP38-T to answer your door with your cellphone
- Mount a third-party 14mm security camera in the camera slot to see who is at your door
- Use as extra Door Station to any Door Station Kit



ACNC/TotalPlex®

DP38-NxM

Door Station (M-Series)

SPECIFICATIONS

Power:

Circuit Board: no external power required Camera: see third-party camera specifications

Dimensions:

4.1875" x 6.25" x 1.625"

Shipping Weight:

2.0 lbs


Speaker:

Frequency Response: 400~2.8kHz


Impedance: 8Ω Peak Power: 0.25W


Microphone:

Frequency Response: 200~6.8kHz



MOUNTING

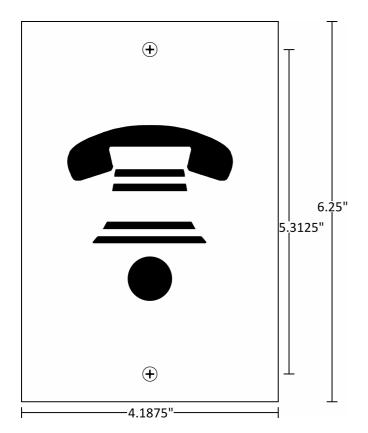



HTTP://WWW.HOMEPHONE.COM

EMAIL: INFO@HOMEPHONE.COM Tel: (630) 241-2800 Fax: (630) 241-2820

1989 UNIVERSITY LANE (Unit H), Lisle, IL 60532