



DTK-DRP16

All-In-One Digital Video Recorder Surge Protector and UPS General Product Specifications

Power outages, surges, and voltage transients on video, data and power lines can render DVRs and security cameras inoperable when they are needed most. DITEK's **DRP16 Series** of CCTV/DVR protectors ensure power quality and continuation of service during electrical events.

DTK-DRP16 DTK-DRP16T

DTK-DRP16B

Product Features

- Combines battery backup, top-quality power and data surge protection, and video surge protection into one convenient product
- Up to 15 minutes of DVR backup power on one outlet
- SAD technology provides optimal circuit protection
- Tight video signal clamping without signal loss
- Available to protect Coax, Coax-Balun, and Twisted Pair Video connections
- Protects two AC outlets, 16 video channels, and 8-wire RJ45 connections
- Product can be used as a standalone unit or mounted in a standard 2U height slot in a 19" rack (specify the DTK-DRPMBK rack mount kit)
- 3 Year Limited Warranty
- Dry Contact for remote monitoring

Specifications

Service Voltage: 120VAC

MCOV: 130VAC

Max Continuous Current: 12 Amps

Max Surge Current: 54,000 Amps (Power),
240A/Channel (Video)

Coaxial Band Pass Range: 0Hz - 10MHz

Protection Modes: L-N, L-G, N-G

Video Clamping Voltage: 2.8V (DRP16);
6.8V (DRP16B, 16T)

RJ45 Ethernet Clamping Voltage: 6.8V

Dimensions: 17.00" x 7.50" x 3.50"
(432mm x 190mm x 88mm)

Weight: 14 lb. (6.3kg)




Modular Backplane Options

- Coax:
DTK-DRP16
2.8V Clamping



- Coax-Balun:
DTK-DRP16B
6.8V Clamping

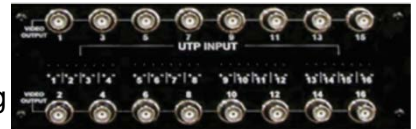

- Twisted Pair:
DTK-DRP16T
6.8V Clamping



NOTE: The **DRP16B** includes a 16-Channel Passive Balun Converter

Battery Backup Specifications

Load Rating: 450VA/250W Max

Battery Run Time (Approx.): 15 Minutes

Low Voltage Transfer to UPS: 95VAC

High Voltage Transfer to UPS: 135VAC

Transfer Time: < 4 ms

Battery Type: 12V/7AH, field replaceable
Part Number: DTK-B12RT7

