

# **SHORT ROLLER BALL\***



**(** )

 $\mathbf{R}$ 

Ι

### \* Replaces the Dome Switch

♦ 360° of Ball Access, Provides Smooth Travel of the Plunger for Longer Life & Better Reliability

- ◆ Screw Down Flange ◆ 12" Wire Leads #22AWG or Screw Terminals
  - ◆ Jacketed Cable, Zip Cord, Longer Leads Available On Request
- ♦ Hermetically Sealed ♦ Plated Contacts Resist Sticking and/or Freezing
  - Built-in E.O.L. Resistors and Diodes Upon Request
  - ◆ Spacer and Mounting Hardware Included ◆ Spacers Sold Separately
    - ◆ Supervisory Loops Upon Request
    - ◆ Colors: White, Brown ◆ Lifetime Warranty







DS-01T

PART N	UMBERS:			
12" Wire Leads			<b>Closed Loop</b> DS-01	<b>SPDT</b> DS-03
Terminal Block			DS-01T	
Travel:	Total Pre Travel	.200 .080 ± .030		

GEORGE RISK INDUSTRIES, INC. GR.I. PLAZA KIMBALL, NE 69145



TOLL-FREE 1-800-445-5218 TOLL-FREE 1-800-523-1227 (308) 235-4645 FAX (308) 235-3561 E-MAIL: grisales@megavision.com WEB SITE: www.grisk.com



## SHORT ROLLER BALL


## INSTALLATION APPLICATION:

360° of ball access provides smooth travel of the ball downward resulting in longer life and better reliability. The shorter length of the body helps the installer by eliminating the need for a long, deep hole to allow for a switch housing. The collar is flanged to insure reliability with positioning and positive retention when the switch is installed.

GRI's creation of the new short roller ball style switch uses a magnetic reed with a rolling ball to control the magnet. The ball plunger can be activated from any direction.

Our improved Short Roller Ball Switch is actuated when the ball rolls into the switch rather than simply being forced into the housing.

**Important Note:** GRI's improved DS and RB Series of products are not recommended for the bottom or side track of windows and doors.

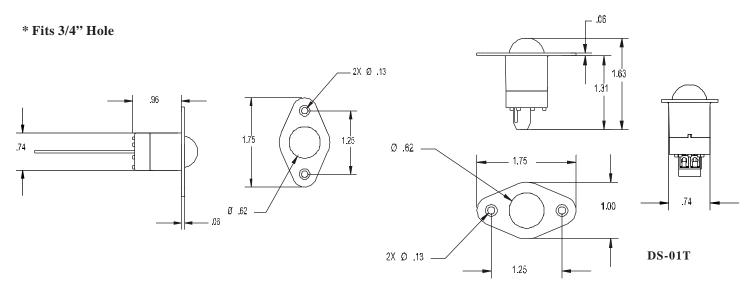

#### GRI products meet or exceed these minimum general specifications:

PART NUMBER	LOOP TYPE	ELECTRICAL CONFIG.	REED FORM	MAXIMUM INITIAL CONTACT RESISTANCE	MAXIMUM CONTACT RATING	MAXIMUM SWITCHING VOLTAGE	MAXIMUM SWITCHING CURRENT
				$(\Omega)$	(W)	(VDC)	(A)
DS-01	Closed	N/O	А	.150	10	200	.500
DS-01T	Closed	N/O	А	.150	10	200	.500
DS-03	Open/Closed	SPDT	С	.140	5	175VDC	.250

### WARRANTY:

Lifetime warranty against workmanship, material and factory defects.

### CONTACT YOUR G.R.I. DISTRIBUTOR OR CALL:

GEORGE RISK INDUSTRIES, INC. GR.I. PLAZA KIMBALL, NE 69145



TOLL-FREE 1-800-445-5218 TOLL-FREE 1-800-523-1227 (308) 235-4645 FAX (308) 235-3561 E-MAIL: grisales@megavision.com WEB SITE: www.grisk.com