

# 2011 CONDENSED CATALOG LIST PRICE GUIDE



# Table of Contents



Lifetime Warranty 3	Access/Egress Controls	
-	6000 Series Monitor Panels	30
Terms and Conditions 4	6000 Series Pushbuttons	30-32
Electromechanical Locks	6170 Series Weatherproof Pushbuttons	33
1300 Series Electric Deadbolt5	6300 Series Audible	32
1600 Series Electric Strikes-Standard 6	6335/6336 Concealed Pushbuttons	39
1700 Series Electric Strikes-Fire	6350 4 Zone Delay Egress Monitor	39
1800 Series Electric Strikes-Fire HD	6370 Monitor/Reset Station	39
Electromagnetic Locks	6451 Series Exit Sensor Bar	40
Electromagnetic Lock Family 8	6500 Series High Visibility Pushplates	34
Typical Installations9	6600 Series Halo Lighted Push Buttons	35
2000 Series 1200 Lbs. HF	6700/6800 Series Pushplates	36
2013 Series Gate Lock 1200 Lbs. HF11	6705/6805 Series Handicapped Pushplates	37
2600 Series Mortise 650 Lbs. HF11	6901 Series Specialty Pushplates	38
2101 Series Early Warning 1200 Lbs. HF 12	7000 Series Keyswitches	41
2268 Series Low Profile 1200 Lbs. HF	7075 Series Break Glass Exit Stations	42
2280 Series SlimLine 1200 Lbs. HF 14	7300/7400 Series Digital Keypads	43
2500 Series Mini-Mag 650 Lbs. HF	8000 Series Consoles	44-46
2585 Series Bantam 650 Lbs. HF	8500 Communicating Bathroom Systems	47
2800 Series Door Holders 16		
Product Approvals 17	Time Controllers	
3000 Series 1500 Lbs. HF	7080 Series Time Delay Module	42
Custom Length Housings 19	7086 Series Programmable Timer	42
3006 Series w/ PIR 20		
3101B Series Delay Egress 1500 Lbs. HF 21	Accessories	
3101B-ES Series Delay Egress Controller 22	7088 Rectifiers - Prewired	42
3101B-R Series Delay Egress Controller 22	9200 Series Door Status Switches	48
TJ Conversion Kits	9300 Series Door Cords	48
Mounting Accessories	Product Approvals	17
Specialty Brackets and Hardware		
4000 Series Filler/Spacer Plates,	Wire Size Selection Chart	29
Angle Brackets24,25	Special Finishes	40
	Special Finishes	49
Power Supplies	Reference Section	50
5025 Series 1 Zone 26		
5500 Series up to 10 Zones	Website Referral	51
5600 Series up to 10 Zones		
5200/5300 Series Transformers		
5400 Series Battery Back-Up 29		

Tel: 1.877.DYNALOCK

# Warranty Support





A lifetime warranty applies to all standard DynaLock products. Damaged products will be repaired or replaced at no charge. Non-standard electronic products, e.g. custom consoles, will be repaired, if possible, at no charge. Custom length housings and special finished products will be replaced only if factory defective. Charges may apply for products damaged by repeated abuse or errors in installation. Products not subject to charges do not have to be returned by the original purchaser.

Please follow this simple procedure when a problem occurs:

- Call toll free 877-DynaLock, ask for a sales engineer and explain the problem. Most problems are resolved by a simple phone consultation. If the problem is not solved, a Return Authorization (RMA) number will be issued to you.
- To request a Return Authorization, please fill out the form at <a href="www.dynalock.com/rma">www.dynalock.com/rma</a> or look under 'Resources' at www.dynalock.com. An RMA number and instructions will be e-mailed to you within 48 hours. Alternatively, you may fax us at (860) 585-0338.
- Clearly mark the shipping container with the RMA number and ship the product prepaid to: DynaLock Corp., 705
   Emmett Street, Bristol, CT 06010. The returned product will be repaired or replaced as soon as possible, usually within 48 hours.

WE ASSUME NO RESPONSIBILITY FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING FROM DEFECTIVE PRODUCTS. OUR SOLE LIABILITY SHALL BE TO REPAIR OR REPLACE DEFECTIVE PARTS WHICH HAVE BEEN RETURNED TO US, POSTAGE PREPAID. EXCEPT FOR THE LIMITED WARRANTY PROVIDED HEREIN, WE EXPRESSLY DISCLAIM ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OR MERCHANTABILITY OF FITNESS FOR A PARTICULAR PURPOSE OR WARRANTIES RELATING TO THE CONDITION OF OUR PRODUCTS.

# **Emergency Technical Support**

Routine technical support is available Monday - Friday, 8:00AM - 5:00PM (EST) by calling the factory toll-free at 1-877-DynaLock.

**Emergency technical support** is available Monday - Friday, 5:00PM - 8:00PM (EST) by calling:

Glen @ 860-637-2599 or Will @ 860-637-2394

# Terms and Conditions



**Terms:** 2% ten days, 30 days net from date of invoice. Minimum single invoice \$50.00 net, plus shipping.

A late charge of 1.5% per month on any balance which remains unpaid after 60 days from date of

invoice.

**Prices:** Unless firm prices have been quoted in writing for specific projects, all prices are subject to change

and prices in effect on the date of shipment will apply. Prices apply to standard domestic packaging.

Errors and omissions in pricing are subject to correction.

**Shipments:** All domestic shipments are F.O.B. DynaLock factory, unless otherwise agreed to in writing by

DynaLock. Purchaser assumes risk of loss upon tender of goods to carrier.

Routing, Receipt & Order Acceptance

Electronically-transmitted customer orders must be routed via fax (860-585-0338) or via email (orders@dynalock.com), and are subject to final acceptance by the DynaLock Customer Service/Order Entry Department. Accepted orders are normally acknowledged within 24 hours. Its the purchaser's responsibility to confirm successful electronic transmission and receipt of their orders by DynaLock Corp. and verify the accuracy of the order acknowledgment. DynaLock assumes no liability for lost or

incorrectly routed, electronically-transmitted orders.

Claim and Notice of Non-Conformity:

Goods must be inspected promptly. Claims relating to nonconformity of goods or shipments must be reported within (10) business days following receipt of goods. All notices and claims must include Purchaser's order number and DynaLock's invoice number. Unless written notice of a claim of nonconformity is given within such 10-day period, the claim may be disregarded. DynaLock's liability for any nonconformity in goods or shipment is expressly limited to replacement of the goods or goods of equal value, together with transportation charges, if any, incurred by Purchaser. PURCHASER SHALL NOT BE ENTITLED TO CLAIM CONSEQUENTIAL DAMAGES FOR ANY NONCONFORMITY OR

DEFECT IN THE GOODS.

**Cancellations:** Orders and/or items may be cancelled only with DynaLock's written consent. DynaLock reserves the

right to impose a cancellation charge.

**Returns:** Returns will not be accepted without prior approval and a RMA number (Return Authorization)

issued by DynaLock's Customer Service Department. Products returned for restocking subject to a **restocking charge of 30%**. Additional charges may be imposed if return is damaged. Purchaser must provide invoice number and information regarding original date of shipment with all returned goods. Any credit issued must be applied to open or future invoices. **Cash refunds will not be issued**. Custom products, e.g. consoles, custom length housings, special finished products cannot be

returned for credit.

**Engineering Charges:** Engineering charges will be discussed, negotiated and estimated prior to any actual engineering

services being performed. DynaLock will not be responsible or bound for estimates or preliminary discussions by telephone. Firm estimates will only be given after submittal of specifications, drawings

and theory of operation.

**Taxes:** Purchaser is responsible for all taxes or charges in lieu of taxes now or hereafter imposed on the sale

or transportation of goods purchased, except for income or similar taxes imposed on DynaLock.

**Governing Law:** The rights and obligations of DynaLock and Purchaser shall be governed by and construed in

accordance with the laws of the State of Connecticut.

**No Modification:** These terms and conditions of sale cannot be modified or amended without DynaLock's

consent. DynaLock shall not be bound by the terms or conditions of any purchase order, order acknowledgment or other form submitted by Purchaser unless DynaLock has consented in writing to

such terms.

Electromagnetic Lock Performance:

DynaLock electromagnetic lock holding force ratings are stated at peak performance (±10%), under

proper mounting and optimum input power conditions.

**Cost and Expenses:** In the event DynaLock incurs any expenses in connection with the enforcement of the Purchaser's

obligations under this order, DynaLock shall be entitled to collect such costs, including reasonable

attorney's fees from the Purchaser in connection therewith.

Prices Effective January 1, 2011 Tel: 1.877.DYNALOCK Page 4 Fax: 1.860.585.0338 ©2011 DynaLock Corp.

# Mortise Electric Deadbolt





## **1300 Series Mortise Electric Deadbolt**

Mortise Mounted Narrow Design \*Fail Safe Electric Deadbolt Lock Specify 12 or 24 VDC/VAC when ordering.

Size: 1-1/2"W x 8"H x 1-5/8"D Backset Current Draw: 0.85 Amps @ 12 VDC/VAC 0.45 Amps @ 24 VDC/VAC

\*Fail Safe operation indicates power required to lock. Interruption of power allows bolt to retract. Not suitable for use on wood door and frame installations or doors equipped with panic devices. Never use on doors designated for or in a path of egress.

MODEL	PRODUCT	FINISH	LIST PRICE
1300-12	Mortise Electric Deadbolt - 12 VAC/VDC	US28	388.00
1300-24	Mortise Electric Deadbolt - 24 VAC/VDC	US28	388.00

OPTIONS		LIST PRICE
ARSB	Auto-Relock Switch - Ball Type	50.00
ARSM	Auto-Relock Switch - Concealed Type	50.00
BPS	Bolt Position Switch	50.00
DPSB	Door Position Switch - Ball Type	50.00
DPSM	Door Position Switch - Concealed Type	50.00
• MB	Mounting Brackets (4 Pieces)	22.00

• NOTE: Required when retro-fitting into existing frame.

# **Electric Strikes**











1605

### **1600 Series Electric Strikes**


DynaLock 1600 Series Electric Strikes are universally adaptable to suit all door and frame types and accommodate most locking devices with up to a 3/4" latch projection. To simplify ordering and speed installation all 1600 Series models feature 12/24V AC/DC field-selectable operation, dial-selectable fail-safe or fail-secure operating mode, 1/4" horizontal adjustment and modular, plug-in wire connections. All models are also available in a low-profile, 1-1/16" backset version, for narrow-style aluminum frames, which accept up to a 5/8" latch projection. Optional latch/keeper monitor switches are also available.

Current Draw: 0.375 Amps @ 12VDC; 0.565 Amps @ 12VAC 0.190 Amps @ 24VDC; 0.280 Amps @ 24VAC

MODEL	PRODUCT	FINISH	LIST PRICE
<b>1604S</b>	Aluminum/Wood Frames, Std. Profile, 1-1/4" x 4-7/8"	US32D	174.00
1604L	Aluminum/Wood Frames, Low Profile, 1-1/4" x 4-7/8"	US32D	174.00
<b>1614S</b>	Steel/Wood Frames, Std. Profile, 1-1/4" x 4-7/8"	US32D	174.00
1614L	Steel/Wood Frames, Low Profile, 1-1/4" x 4-7/8"	US32D	174.00
<b>1605S</b>	Aluminum/Wood Frames, Std. Profile, 1-1/8" x 5-7/8"	US32D	179.00
1605L	Aluminum/Wood Frames, Low Profile, 1-1/8" x 5-7/8"	US32D	179.00
<b>1607S</b>	Aluminum/Wood Frames, Std. Profile, 1-1/4" x 6-7/8"	US32D	179.00
1607L	Aluminum/Wood Frames, Low Profile, 1-1/4" x 6-7/8"	US32D	179.00
<b>1608S</b>	Aluminum/Wood Frames, Std. Profile, 1-7/16" x 7-15/16"	US32D	185.00
1608L	Aluminum/Wood Frames, Low Profile, 1-7/16" x 7-15/16"	US32D	185.00

### **1661 Series Electric Rim Strikes**

DynaLock 1661 Series Electric Rim Strikes are universally adaptable to suit all door and frame types and accommodate Pullman latch rim exit devices with up to a 3/4" latch projection. To simplify ordering and speed installation, the 1661 Series models feature AC/DC operation (specify 12 or 24V), are fully reversible for left or right hand doors, and are horizontally adjustable to compensate for door misalignment. For surface applications a frame depth of 1-5/8" is required (for the electrical insert). Specify the RMP option for semi-mortise installations. For double door installations specify the DDH option to allow mounting of the 1661 on the inactive door leaf.



MODEL	PRODUCT	FINISH	LIST PRICE
1661-12	Fail Secure, 12 VAC/VDC, 1-3/4" x 9"	US32D	300.00
1661-24	Fail Secure, 24 VAC/VDC, 1-3/4" x 9"	US32D	300.00

1600 & 1	661 SERIES OPTIONS	LIST PRICE
LMS	Lock Monitor Switches - Indicate latch and keeper status. For the 1600 Series.	50.00
SF	Special Finishes - US32D standard. US3, US4, US10, US10B and US32 available. For the 1600 Series.	28.00
DDH	Double Door Housing. For the 1661 Series.	148.00
RMP	Rear Mounting Plate - Kit for semi-mortise installations or reinforcement in surface applications. For the 1661 Series.	36.00







# Fire-Labeled Electr<u>ic Strikes</u>



# 0

1704

### 1700 Series Fire-Labeled Electric Strikes

DynaLock 1700 Series Fire-Labeled Electric Strikes accommodate cylindrical, center line mortise, and narrow-line aluminum lock sets, along with mortise exit devices, with up to 3/4" latch projection (non-Pullman type). An enlarged latched cavity width allows compatibility with 3-piece, anti-friction latches. Fail-secure lock mode is standard and 12V and 24V models accept AC/DC input. All models are fully reversible for left or right-hand doors and standard mounting tabs and installation fasteners are included. Radius or square corner, US32D Stainless Steel, ANSI 4-7/8" x 1-1/4" faceplates are available.

MODEL	PRODUCT	FINISH	LIST PRICE
1704-12	Aluminum Frames, Radius Corners, 12VAC/VDC	US32D	310.00
1704-24	Aluminum Frames, Radius Corners, 12VAC/VDC	US32D	310.00
1714-12	Aluminum/Hollow Metal Frames, Square Corners, 12VAC/VDC	US32D	310.00
1714-24	Aluminum/Hollow Metal Frames, Square Corners, 12VAC/VDC	US32D	310.00



# 1800 Series Fire-Labeled Heavy-Duty Electric Strikes

DynaLock 1800 Series Fire-Labeled Heavy-Duty Electric Strikes accommodate cylindrical, center line mortise, and narrow-line aluminum lock sets, along with mortise exit devices, with up to 3/4" latch projection (non-Pullman type). All models are non-handed, feature horizontal adjustable (up to 1/4"), internal solenoid and a heavy-duty, cast stainless steel (US32D) housing. Additionally a concealed pry-guard and saddle-mount housing design enhance strength, durability and tamper resistance. Fail-secure lock mode is standard and 12V and 24V models accept AC/DC input. Choice of ANSI 4-7/8" x 1-1/4" (1814) or 9" x 1-3/8" (1819) faceplates.



MODEL	PRODUCT	FINISH	LIST PRICE
1814-12	4-7/8" x 1-1/4" Faceplate, 12VAC/VDC	US32D	370.00
1814-24	4-7/8" x 1-1/4" Faceplate, 24VAC/VDC	US32D	370.00
1819-12	9" x 1-3/8" Faceplate, 12VAC/VDC	US32D	410.00
1819-24	9" x 1-3/8" Faceplate, 24VAC/VDC	US32D	410.00

Fits Frames cut out for:	Folger Adam 712 (1814)	Folger Adam 310-2 (1819)
	Von Duprin 6211 ANSI (1814)	Von Duprin 6215 (1819)
	Von Duprin 6226 (1819)	



All models are Fire-Labeled, UL 10C (1-1/2 hr.) and UL 1034 Burglary-resistant.

Current Draw (Sound): 0.15 Amps @ 12VDC (Silent) 0.20 Amps @ 12VDC (Buzz)

0.07 Amps @ 24VDC (Silent) 0.11 Amps @ 24VDC (Buzz)





# Electromagnetic **Lock Family**



# **PREMIER LINE**

3000 **SERIES**  1500 LBS. HF FAS-TRAK MOUNTING

### **FEATURES:**

- FULL LINE OPTIONS
- UPGRADABLE CIRCUIT BOARD
- FAS-TRAK MOUNTING
- ONE PIECE HOUSING
- BUILT-IN PIR OPTION
- NO VISIBLE MOUNTING SCREWS

3101B **SERIES** 

1500 LBS. HF DELAY EGRESS **SYSTEM** 

### **FEATURES:**

- FULL LINE OPTIONS
- FAS-TRAK MOUNTING
- ONE PIECE HOUSING
- CODE COMPLIANT MODELS
- NOT AFFECTED BY DOOR IRREGULARITIES
- SELF CONTAINED SYSTEM
- WORKS WITH EXISTING DOOR HARDWARE

# **STANDARD LINE**

2000 **SERIES** 

1200 LBS. HF CONVENTIONAL **MOUNTING** 

### **FEATURES:**

- FULL LINE OPTIONS
- UPGRADABLE CIRCUIT BOARD
- ADJUSTABLE MOUNTING
- SEALED GATE LOCK MODEL
- LOW COST

# **SLIM LINE**

2268 **SERIES** 

1200 LBS, HF "CLASSIC" LOW-PROFILE

### **FEATURES:**

- FULL LINE OPTIONS
- LOW 2" PROFILE
- RETROFITS SOME **EXISTING LOCKS**

2280 **SERIES** 

1200 LBS. HF "CLASSIC" LOW-PROFILE

### **FEATURES:**

- FULL LINE OPTIONS
- UPGRADEABLE CIRCUIT BOARD

Page 8

ONE PIECE HOUSING

# MINI LINE

2500 **SERIES**  650 LBS. HF **STANDARD** MINI-MAG

### **FEATURES:**

- FULL LINE OPTIONS
- UPGRADABLE CIRCUIT BOARD
- LOW-1-3/4" PROFILE
- LOW COST

2585 SERIES

650 LBS. HF "BANTAM" COMPACT LOCK

### FEATURES:

- SMALL 8-1/2" LENGTH
- LOW COST

2600 **SERIES** 


650 LBS. HF SLIDING DOOR MORTISE LOCK

### FEATURES:


- NARROW 1-1/2" WIDTH
- OPTIONAL SLIDING DOOR MOUNTING HARDWARE




# **OUTSWING DOORS**




Single Lock

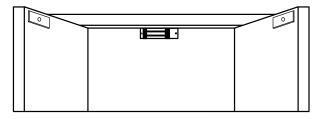

Single Lock Mounted On Double Door Without Center Mullion

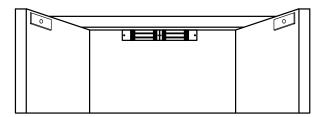

Double Lock Mounted On Double Door Without Center Mullion

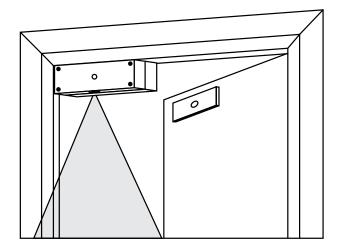

Single Lock With Built-in Adjustable PIR For Immediate Free Egress

3000 Series Electromagnetic Locks have the unique ability to change hand to match door handing. The wiring compartment may be located on the left or right hand side of the lock assembly, ideally toward the center of the opening. Handing may be specified at time of order or easily modified in the field.\*




**3000LHR** 


**3000RHR** 

\* Field modifications will result in the misorientation of the DynaLock logo. Replacement access covers are available from the factory at no charge.

# **INSWING DOORS**

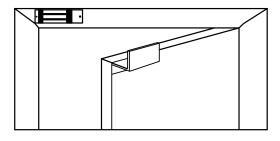

Single Lock, Inswing Door Mounted To Header Face With Adjustable Top Jam "Z" Bracket



Double Lock, Inswing Door Center Mounted To Header Face With Adjustable Top Jamb "Z" Brackets





### 2000 Series 1200 Lb.

Electromagnetic locks, surface mounted for outswing or inswing single or double doors.

Size: 1-1/2"D x 2-3/4"H x 11"L Single or 22"L Double

Multi-voltage field selectable 12/24 VAC/VDC

Current Draw: 0.42 Amps @ 12V Single / 0.84 Amps Double

0.21 Amps @ 24V Single / 0.42 Amps Double



MODEL	PRODUCT	FINISH	LIST PRICE
2011	Single Electromagnetic Lock Outswing	US28	403.00
2012	Single Electromagnetic Lock Pair Outswing	US28	449.00
2022	Double Electromagnetic Lock Outswing	US28	806.00
2011TJ20	Single Electromagnetic Lock Inswing	US28	517.00
2012TJ21	Single Electromagnetic Lock Pair Inswing	US28	622.00
2022TJ22	Double Electromagnetic Lock Pair Inswing	US28	1034.00



OPTIONS		LIST PRICE
• DSM DSM2	Door Status Switch - Signals door closed or ajar. Door Status Switch - For the 2022 Series.	56.00 112.00
• HSM	High Security Monitor. Includes the following: Door Status Switch - Signals door closed or ajar. Dynastat Force Sensor - Indicates efficient magneti	89.00
HSM2	High Security Monitor - For the 2022 Series.	178.00
• VOP	Value Option Package. Includes the following: Door Status Switch - Indicates door closed or ajar. Dynastat Force Sensor - Indicates efficient magneti Anti-Tamper Switch - Signals removal of wiring acce Relock Time Delay - Adjustable 1-80 Seconds.	ess cover.
VOP2	Value Option Package - For the 2022 Series.	310.00
TD	Relock Time Delay - Adjustable 1-80 Seconds.	66.00
CLH	Custom Length Housing - See page 19.	
* LCB	Basic Lock Less Circuit Board	Single Deduct(20.00) Double Deduct(40.00)
• LED	Bi-Color LED - For local signaling of lock status. (Requires HSM or VOP Option. Not available on TJ	36.00
LED2	Bi-Color LED's (2) - For the 2022 Series. (Requires VOP2 Option. Not available on TJ models.)	HSM2 or 72.00
LP	Low Power Coil - 12V only @ 0.16 Amps (Single Lo	ck) 11.00
LP2	Low Power Coils - 12V only @ 0.32 Amps (Double I	
OFA	Offset Armature - For narrow style storefront doors (When ordered with lock)	
SF	Special Finish - Standard finish US28. Special anodi finishes see page 47.	zed



**CSFM** 

Notes: • DSM, HSM, VOP and LED options not available on the 2012 Series.

\* DSM, HSM, VOP, TD and LED options not available with the LCB option.





### 2013 Series 1200 Lb. Gate Lock

Electromagnetic lock, surface mounted for sliding or swinging gates. Face drilled mounting holes, weather resistant, sealed 1/2'' NPT conduit fitting with six foot long 18AWG leads.

Field selectable 12/24 VDC

Size: 1-1/2"D x 2-1/2"H x 9-1/4"L Current Draw: 0.42 Amps @ 12VDC 0.21 Amps @ 24VDC

MODEL	PRODUCT	FINISH	LIST PRICE
2013	Single Gate Lock - 12/24 VDC	US28	433.00

OPTIONS		LIST PRICE
DYN	Dynastat Force Sensor - Indicates efficient magnetic bond.	66.00
GLB	Gate Lock Bracket - Fully adjustable "Z" bracket for swinging gate applications.	111.00
GLB2	Gate Lock Bracket - "L" Brackets for sliding gate application.	137.00
RWE	Rear Wire Exit - Coil wiring exits from back of housing in lieu of conduit nipple.	N/C
SF	Special Finish - Standard finish US28. Special anodized fin-	
	ishes see page 49.	

Notes: For AC operation order #7088 Pre-wired Rectifier Bridge. See page 40.



NYC MEA #23-92-E

# 2600 Series 650 Lb. Mortise Lock

2600

Electromagnetic lock, mortise mounted for sliding door.

Field selectable 12/24 VDC

Size: 1-1/2"W x 8-3/4"H x 1-1/8"D Current Draw: 0.50 Amps @ 12VDC 0.25 Amps @ 24VDC

MODEL	PRODUCT	FINISH	LIST PRICE
<b>2600</b> 346.00	Single Mortise Lock - 12/24 VDC	US28	
OPTIONS			LIST DDICE

OPTIONS		LIST PRICE
AMB DYN	Armature Mounting Block Dynastat Force Sensor - Indicates efficient magnetic bond.	53.00 66.00
МВ	Mounting Brackets - Two piece kit.	21.00
SF	Special Finish - Standard finish US28. Special anodized finishes see page 49.	

Notes: For AC operation order #7088 Pre-wired Rectifier Bridge. See page 40.







Electromagnetic lock, surface mounted for outswing doors. Includes early warning door movement sensor output and door status output. Designed to initiate a remote alarm upon unauthorized exit attempts or to trigger an off-site delay egress system.

Size: 1-1/2"D x 2-3/4"H x 11"L Field selectable 12/24 VDC

Current Draw: 0.42 Amps @ 12VDC

0.21 Amps @ 24VDC

MODEL	PRODUCT	FINISH	LIST PRICE
2101	Single Lock - 12/24 VDC	US28	528.00

OPTIONS		LIST PRICE
LP SF	Low Power - 12VDC only @ 0.16 Amps Special Finish - Standard finish US28. Special anodized finishes see page 49.	11.00

Notes: For AC operation order #7088 Pre-wired Rectifier Bridge. See page 40.





### 2268 Series 1200 Lb. Classic Low Profile

"Classic" low profile electromagnetic locks, surface mounted for single and double outswing or inswing doors. Retrofits some existing locks.

Size: 2-3/16"D x 2"H x 14"L Single or 25"L Double

Multi-voltage field selectable 12/24 VDC For AC operation specify RC Option.

Current Draw: 0.68 Amps @ 12VDC Single / 1.36 Amps Double

0.35 Amps @ 24VDC Single / 0.70 Amps Double



2268-15

MODEL	PRODUCT	FINISH	LIST PRICE
2268-10	Single Electromagnetic Lock Outswing	US28	443.00
2268-15	Single Electromagnetic Lock Pair Outswing	US28	493.00
2268-20	Double Electromagnetic Lock Pair Outswing	US28	886.00
2268-TJ10	Single Electromagnetic Lock Inswing	US28	554.00
2268-TJ20	Double Electromagnetic Lock Pair Inswing	US28	1108.00



_	=	=	=
-			
	2268	-20	



2268-TJ10



2268-TJ20

OPTIONS		LIST PRICE
ATS	Anti-Tamper Switch - Signals removal of the housing cover.	42.00
• DSM	Door Status Switch - Signals door closed or ajar.	56.00
DSM2	Door Status Switch - For the 2268-20 Series.	112.00
• DYN	Dynastat Force Sensor - Indicates efficient magnetic bond.	66.00
DYN2	Dynastat Force Sensor - For the 2268-20 Series.	132.00
• LED	Bi-Color LED - For local signaling of lock status. (Requires DYN Option)	36.00
LED2	Bi-Color LED's (2) - For the 2268-20 Series. (Requires DYN2 Option)	72.00
RC	Rectifier For AC Operation. For 2268-10 and 2268-15 only.	23.00
RC2	Rectifier For AC Operation. For the 2268-20 only.	46.00
SF	Special Finish - Standard finish US28. Special anodized finishes see page 49.	
TD TD2	Time Delay - 1-60 seconds. For 2268-10 & 2268-15 only. Time Delay - 1-60 seconds. For the 2268-20 only.	66.00 132.00

Notes: • DSM, DYN and LED options not available on the 2268-15 Series.







### 2280 Series 1200 Lb. SlimLine

New "upscale" low profile electromagnetic locks, surface mounted for single and double outswing or inswing doors. Seamless one-piece lock housings mount with an adjustable baseplate for quicker installations. Armatures utilize high-impact plastic housings, with incorporated foam pads to reduce noise. When ordered with DSM, concealed disc magnets are included at each end of the armature housings.

Size: 1-1/2"D x 2-1/16"H x 12-3/4"L Single or 25-1/2"L Double

Multi-voltage field selectable 12/24 VDC/VAC

Current Draw: 0.68 Amps @ 12VDC Single / 1.36 Amps Double

0.35 Amps @ 24VDC Single / 0.70 Amps Double



MODEL	PRODUCT	FINISH	LIST PRICE
2280	Single Electromagnetic Lock Outswing	US28	485.00
2282	Double Electromagnetic Lock Pair Outswing	US28	970.00
2280-TJ80	Single Electromagnetic Lock Inswing	US28	607.00
2282-TJ82	Double Electromagnetic Lock Pair Inswing	US28	1214.00



2280-TJ80

OPTIONS		LIST PRICE
DSM	Door Status Switch - Signals door closed or ajar.	56.00
DSM2	Door Status Switch - For the 2282 Series.	112.00
DYN	Dynastat Force Sensor - Indicates efficient magnetic bond.	66.00
DYN2	Dynastat Force Sensor - For the 2282 Series.	132.00
LED	Bi-Color LED - For local signaling of lock status.	36.00
	Flying leads. (Order with DYN. Not available on TJ models.)	
LED2	Bi-Color LED's (2) - For the 2282 Series. Flying leads.	72.00
	(Order with DYN2. Not available on TJ models.)	
SF	Special Finish - Standard finish US28.	
	For special anodized finishes, see page 49.	



Note: For adjustable time delayed relocking, specify Model 7080 in-line time delay module (sold separately).





### 2500 Series 650 Lb. "Mini"

Mini electromagnetic locks, surface mounted for single and double outswing or inswing doors.

Size: 1-1/4"D x 1-3/4"H x 10-1/2"L Single or 21"L Double

Multi-voltage field selectable 12/24 VAC/VDC

Current Draw: 0.50 Amps @ 12V Single / 1 Amp Double

0.25 Amps @ 24V Single / 0.50 Amps Double



MODEL	PRODUCT	FINISH	LIST PRICE
2511	Single Electromagnetic Lock Outswing	US28	340.00
2522	Double Electromagnetic Lock Pair Outswing	US28	680.00
2511TJ	Single Electromagnetic Lock Inswing	US28	422.00
2522TJ2	Double Electromagnetic Lock Pair Inswing	US28	844.00



2511TJ

### 2585 Series 650 Lb. "Bantam"

"Bantam" electromagnetic lock, surface mounted for single outswing or inswing doors.

Size: 1-1/4"D x 1-3/4"H x 8-1/2"L Field Selectable 12/24 VDC.

Current Draw: 0.50 Amps @ 12VDC

0.25 Amps @ 24VDC



MODEL	PRODUCT	FINISH	LIST PRICE
2585	Single Lock Outswing	US28	327.00
2585-TJ85	Single Lock Inswing	US28	409.00

NOTE: Only options available for the 2585 are DSM & Special Finish



		-			
	-	1	_		
		100			
		0			k.
_					p.
201				-	

2585-TJ85

OPTIONS		LIST PRICE
ATS CLH	Anti-Tamper Switch - Signals removal of the housing cover. Custom Length Housing - See page 19.	44.00
DSM	Door Status Switch - Signals door closed or ajar.	56.00
DSM2	Door Status Switch - For the 2522 Series.	112.00
DYN	Dynastat Force Sensor - Indicates efficient magnetic bond.	66.00
DYN2	Dynastat Force Sensor - For the 2522 Series.	132.00
LED	Bi-Color LED - For local signaling of lock status. (Requires DYN Option. Not available on TJ models.)	36.00
LED2	Bi-Color LED's (2) - For the 2522 Series. (Requires DYN2 Option. Not available on TJ models.)	72.00
SF	Special Finish - Standard finish US28. Special anodized finishes see page 49.	

Notes: For AC operation order #7088 Pre-wired Rectifier Bridge. See page 40.



# Electro magnetic Door Holders





2801



2802



2804



2805



2806



2810



2860



2870

# **2800 Series Electromagnetic Door Holders**

DynaLock 2800 Series Electromagnetic Door Holders accept Tri-Voltage, 12VDC, 24VAC/VDC, or 120VAC input (Model 2810 is 24VAC/VDC, only). Standard models are offered for single or double doors and deliver 30-45 lbs. holding force. High-security Model 2810 delivers 400 lbs. holding force.

CURRENT DRAW	VOLTAGE
0.060 AMPS	12VDC
0.030 AMPS	24VAC/VDC
0.105 AMPS	24VAC/VDC (2810)
0.030 AMPS	120VAC








280

MODEL	PRODUCT	LIST PRICE
2801	Floor Mount, Single Door	\$264.00
2802	Floor Mount, Double Door	\$332.00
2803	Flush Wall Mount, 1" Extended Armature	\$155.00
2804	Flush Wall Mount, Standard Armature	\$143.00
2805	Surface Wall Mount	\$163.00
2806	Low Profile Wall Mount	\$155.00
2810	Surface Wall Mount, 400 lbs. Holding Force	\$410.00

ACCESSORI	ES PRODUCT	LIST PRICE
2860	Door Armature & Base, Replacement	\$69.00
2861	Armature Extension, 1/2"	\$11.00
2862	Armature Extension, 3/4"	\$11.00
2863	Armature Extension, 1"	\$11.00
2864	Armature Extension, 2"	\$18.00
2865	Armature Extension, 4"	\$30.00
2866	Armature Extension, 6"	\$42.00
2870	Armature Swivel Extension	\$26.00

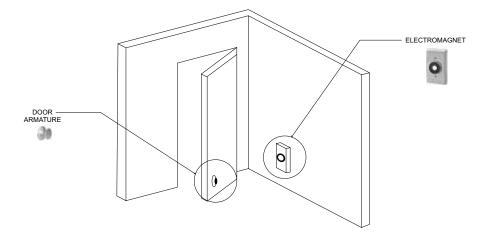

# **Product Approvals**



SERIES		DESCRIPTION	FILE NO.
1600 SERIES			
1700 SERIES	UL •	Burglary-Resistant Electric Door Strikes	FILE #BP7294
1/UU SEKIES	: UL & CUL	Electric Strikes	FILE #R26919
	UL & CUL	Burglary-Resistant Electric Door Strikes	FILE #BP7294
1800 SERIES:			
	UL & CUL UL & CUL	Electric Strikes Burglary-Resistant Electric Door Strikes	FILE #R26919 FILE #BP7294
2000 SERIES		Burgiary-Resistant Liectric Door Strikes	FILL #DP/294
	UL & CUL	Auxiliary Locking Device	FILE #R15538
2260 SERVES	MEA	City of New York Dept. of Buildings	MEA 23-92-E Vol.II
2268 SERIES:	: UL & CUL	Auxiliary Locking Device	FILE #R15538
2500 SERIES:		Administry Locking Device	I ILL #IXIJJJO
	UL & CUL	Auxiliary Locking Device	FILE #R15538
2505 65055	MEA	City of New York Dept. of Buildings	MEA 23-92-E Vol.II
2585 SERIES:	: UL & CUL	Auxiliary Locking Device	FILE #R15538
2800 SERIES:		Addition y Locking Device	11LL #K13330
	UL & CUL	Fire Door Holders	FILE #R26798
2000 CERTES	UL	Releasing Devices	FILE #S4665
3000 SERIES:	: UL & CUL	Auxiliary Locking Device	FILE #R15538
	MEA	City of New York Dept. of Buildings	MEA 23-92-E Vol.II
	CSFM	California State Fire Marshal	#3774-1457:101
3000LC SERII		Auditor Lodino Design	EU E #D1EE20
	UL & CUL MEA	Auxiliary Locking Device City of New York Dept. of Buildings	FILE #R15538 MEA 23-92-E Vol.II
	CSFM	California State Fire Marshal	#3774-1457:101
3006 SERIES:			
3101 SERIES	UL & CUL	Auxiliary Locking Device	FILE #R15538
STUT SEKIES	: UL & CUL	Special Locking Device	FILE #SA9532
	02 00 002	Auxiliary Locking Device	FILE #R15538
	CHGO	City of Chicago Dept. of Buildings	CODE #13-160-269
3101B SERIES	CSFM S.	California State Fire Marshal	#3774-1457:100
STOTE SEKIES	UL & CUL	Special Locking Device	FILE #SA9532
	010:001	Auxiliary Locking Device	FILE #R15538
	CSFM	California State Fire Marshal	#3774-1457:100
5000 SERIES:	: UL & CUL	Caparal Purposa Power Supplies	FILE #E183665
	MEA	General Purpose Power Supplies City of New York Dept. of Buildings	MEA 23-92-E Vol.II
6451 SERIES:			
	UL & CUL	Access Control System Units	FILE #BP8819
	MEA CSFM	City of New York Dept. of Buildings California State Fire Marshal	MEA 23-92-E Vol.II #3774-1457:102
	COLIT	Camornia State File Maishal	#3//4-143/:102



### 3000 Series 1500 Lb.

Electromagnetic locks, surface mounted for outswing or inswing single or double doors.

Size: 1-1/2"D x 2-3/4"H x 11"L Single or 22"L Double

Multi-voltage field selectable 12/24 VAC/VDC

Current Draw: 0.42 Amps @ 12V Single / 0.84 Amps Double (Except 3006)

0.21 Amps @ 24V Single / 0.42 Amps Double (Except 3006)

0.5 Amps @ 12V / 0.3 Amps @ 24V (3006)



3001

MODEL	PRODUCT	FINISH	LIST PRICE
3000	Single Electromagnetic Lock Outswing	US28	443.00
3001	Single Electromagnetic Lock Pair Outswing	US28	491.00
3002	Double Electromagnetic Lock Outswing	US28	886.00
3000TJ30	Single Electromagnetic Lock Inswing	US28	538.00
3001TJ31	Single Electromagnetic Lock Pair Inswing	US28	584.00
3002TJ32	Double Electromagnetic Lock Pair Inswing	US28	1076.00



3002

OPTIONS		LIST PRICE
• DSM DSM2 • HSM	Door Status Switch - Signals door closed or ajar. Door Status Switch - For the 3002 Series. High Security Monitor. Includes the following: Door Status Switch - Signals door closed or ajar. Dynastat Force Sensor - Indicates efficient magne	56.00 112.00 89.00
HSM2 ● VOP	High Security Monitor - For the 3002 Series.  Value Option Package. Includes the following:  Door Status Switch - Indicates door closed or ajar.  Dynastat Force Sensor - Indicates efficient magne	178.00 155.00
VOP2 TD CLH LC	Anti-Tamper Switch - Signals removal of wiring acc Relock Time Delay - Adjustable 1-80 Seconds. Value Option Package - For the 3002 Series. Relock Time Delay - Adjustable 1-80 Seconds. Custom Length Housing - See page 19. A 3000 Series coil assembly supplied in a 2000 Se	310.00 66.00
* LCB	multi-piece housing. Specify LC after any 3000 Senumber. Basic Lock Less Circuit Board	
	Busic Eddit Edds Circuit Bodia	Double Deduct (40.00)
• LED	Bi-Color LED - For local signaling of lock status. (R HSM or VOP Option. Not available on TJ models.)	` ,
LED2	Bi-Color LED's (2) - For the 3002 Series. (Requires VOP2 Option. Not available on TJ models.)	HSM2 or 72.00
LP	Low Power Coil - 12V only @ 0.16 Amps (Single Lot 12V only @ 0.2 Amps (3006)	ock) 11.00
LP2 OFA	Low Power Coils - 12V only @ 0.32 Amps (Double Offset Armature - For narrow style storefront door (When ordered with lock)	
SF	Special Finish - Special anodized finishes see page	49. N/C

NYC MEA #23-92-E **CSFM** 

Notes: • DSM, HSM, VOP and LED options not available on the 3001 Series.

\* DSM, HSM, VOP, TD and LED options not available with the LCB option.



# **Custom Length Housings - Horizontal and Vertical**



3700 - 3750

Vertical Custom Length Housing: Measure dimension floor to bottom of header stop then subtract 1/8". Housing is non-handed.



3500 - 3550

Horizontal Custom Length Housing: Measure dimension between vertical stops then subtract 1/8". Housing is handed - LHR shown.



3600 - 3650

Horizontal Custom Length Housing: Measure dimension between vertical stops then subtract 1/8". Housing is handed - RHR shown.

# **Custom Length Housings**

Custom Length Housings Series' 3500, 3600, 3700 and 3800 may be used with any full size 2000 or 3000 Series electromagnetic lock except the 3006 and 3101B Series. Custom Length Housings 3550, 3650, 3750 and 3850 are designed for use with 2511 and 2522 Mini electromagnetic locks only.

Custom Length Housings provide an unbroken sight line across the header or along a vertical jamb, for a less conspicuous installation. Installation is easy, standard locks are mounted in the conventional manner, a pre-cut track is installed in line with the lock and a "U" shaped channel is attached to the track, concealing both track and lock. Both track and housing ends may be field trimmed as required on all models except the 3700 and 3750.

MODEL	PRODUCT	LIST PRICE
3500	CLH - LHR 30" to 48" Single Horizontal Lock - Single Door. Full Size.	422.00
3550	CLH - LHR 30" to 48" Single Horizontal Lock - Single Door. Mini.	422.00
3600	CLH - RHR 30" to 48" Single Horizontal Lock - Single Door. Full Size.	422.00
3650	CLH - RHR 30" to 48" Single Horizontal Lock - Single Door. Mini.	422.00
3700	CLV to 96" Two Vertical Locks - Single Door. Full Size.	527.00
3750	CLV to 96" Two Vertical Locks - Single Door. Mini.	527.00
3800	CLH to 96" Two Horizontal Locks - Double Door. Full Size.	527.00
3850	CLH to 96" Two Horizontal Locks - Double Door. Mini.	527.00

### Note:

Pricing is for Housing only, locks must be ordered separately. Housings are furnished in US28 finish. For special finishes see page 47. Special lengths or modifications to standard housings are available - consult factory for price and delivery.



3800 - 3850

Horizontal Custom Length Housing: Measure dimension between vertical stops then subtract 1/8". Housing is non-handed and may be installed only when no center mullion is present.





# 3006 Series 1500Lb. Free Egress Maglock

Electromagnetic locks, surface mounted for outswing doors. PIR sensor for immediate door release.

Size: 3"D x 2-3/4"H x 11"L

Multi-voltage field selectable 12/24 VAC/VDC Current Draw: 0.5 Amps @ 12V / 0.3 Amps @ 24V

MODEL	PRODUCT	FINISH	LIST PRICE
3006	Single Electromagnetic Lock with Built-in P.I.R.	US28	928.00



NYC MEA #23-92-E

**CSFM** 

OPTIONS		LIST PRICE
		======
DSM	Door Status Switch - Signals door closed or ajar.	56.00
HSM	High Security Monitor. Includes the following:	89.00
	Door Status Switch - Signals door closed or ajar	
	Dynastat Force Sensor - Indicates effecient magnetic bond.	
LP	Low Power Coil - 12V only @ 0.2 Amps.	11.00
ATS	Anti-Tamper Switch - signals removal of the housing cover.	42.00
OFA	Offset Armature - For narrow style storefront doors.	N/C
	(When ordered with lock)	
SF	Special Finish - Special anodized finishes see page 49.	

Notes: •Intelligent PIR Sensor makes the 3006 the best choice to retrofit an electric strike or other two wire applications. "Eyeball" mount allows PIR adjustment.

**OPTIONS** 



LIST PRICE



### 3101B Series 1500 Lb. Delay Egress System

Delay egress electromagnetic locks, surface mounted for outswing single or double doors. Non-handed.

Sizes: 3"D x 2-3/4"H x 11"L (3101B) 3"D x 2-3/4"H x 22"L (3121B) 3"D x 2-3/4"H x 11"L ea. (3121B2)

Multi-voltage field selectable 12/24 VAC/VDC Current Draw: 0.75 Amps @ 12V / 0.50 Amps @ 24V (3101B)

1.20 Amps @ 12V / 0.75 Amps @ 24V (3121B, 3121B2)



MODEL	PRODUCT	FINISH	LIST PRICE
3101B	Single Delay Egress Lock Outswing	US28	1108.00
3121B	Double Delay Egress Lock Pair Outswing	US28	1753.00
3121B2	Double Delay Egress Lock Pair Outswing	US28	1778.00
	Tandem Unit To Accommodate Center Mullion		



	0		LIGITIKICE
	ATS	Anti-Tamper Switch - Signals removal of the housing cover.	44.00
	ATS2	Anti-Tamper Switch - For the 3121B and 3121B2	88.00
•	BPM	Bypass Monitor - Signals bypass keyswitch activation	56.00
	DSM	Door Status Switch - Signals door closed or ajar.	56.00
	DSM2	Door Status Switch - For the 3121B and 3121B2.	112.00
	DYN	Dynastat Force Sensor - Indicates efficient magnetic bond.	66.00
	DYN2	Dynastat Force Sensor - For the 3121B and 3121B2.	132.00
	ETR	Egress Sensor Omitted - For externally triggered egress.	N/C
	KSO	Keyswitch Omitted - In favor of separate remote keyswitch. (Suggested for door heights over 8 ft.) See page 39.	19.00
	LP	Low Power Coil - 12V only @ 0.40 Amps (Single Lock)	11.00
	LP2 SF	Low Power Coils - 12V only @ 0.72 Amps (Double lock) Special Finish - Standard finish US28. Special anodized finishes see page 49.	22.00

**BUILDING CODE SOFTWARE OPTIONS (FACTORY INSTALLED)** 



BOCA For operation in compliance with BOCA Code. N/C
UBC For operation in compliance with UBC Code. N/C
CHGO For operation in compliance with Chicago Building Code. N/C

Notes: • BPM option not available with the KSO option.

REPLACEME	NT ITEMS	LIST PRICE
•	rogrammed microprocessor. Specify Software Version #.	95.00
(For field repla	cement)	
SIGN 15	Door sign only, 15 second delay verbiage.	32.00
SIGN 30	Door sign only, 30 second delay verbiage.	32.00
3101	Delay Egress Lock (Old style sensor).	1108.00
3101-CHGO	Delay Egress Lock (Old style sensor, compliant with Chicago	1108.00
	Building Code).	

# **Delay Egress Controller**






3101B-ES



3101B-ES Series

Delay egress electronics mounted in enclosure with screw terminal block for hook-up wiring. Typical applications include outside gates and in-swing doors requiring delay egress. Other components are necessary to function properly, see below for more information. BOCA software is available (consult factory).

MODEL	PRODUCT	LIST PRICE
3101B-ES	Delay Egress Controller mounted in 15"x12"x4" steel enclosure	698.00
3101B-R	Delay Egress Controller mounted in 12"x12"x6" weatherproof enclosure, with mounted alarm horn	957.00

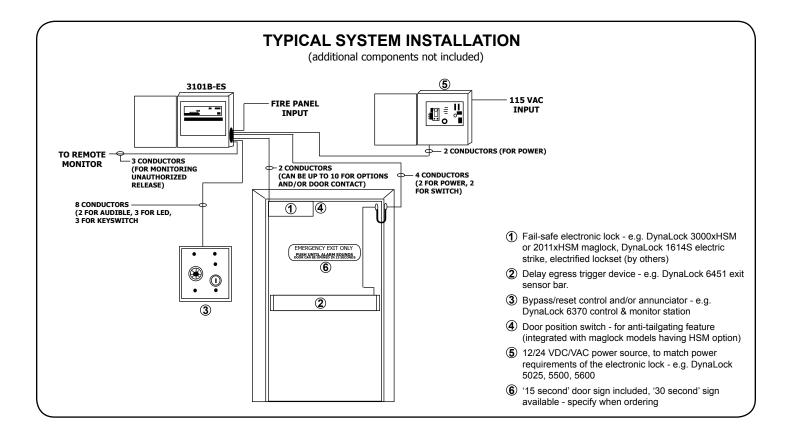

# **Specialty Hardware**











4852



301238





**Gate Lock Bracket** 

Adjustable gate lock brackets facilitate mounting to a variety of gate and post styles.

MODEL	PRODUCT	LIST PRICE
GLB GLB2	Two piece "Z" bracket for swinging gates Two "L" brackets for sliding gates	132.00 137.00

### **Glass Door Brackets**

Glass door brackets facilitate mounting an armature to a glass door with no top rail. Rubber and metal shims protect glass during installation. Brackets will fit 3/8", 1/2" or 3/4" thick doors.

MODEL	USE WITH	LIST PRICE
4850	2011, 2022*, 3000, 3002*	132.00
4852	2012, 3001 (pair)	264.00
4854	2511, 2522* <sup>*</sup>	132.00
4855	2585	132.00
4856	2268-10, 2268-20*	132.00
4858	2268-15 (pair)	264.00
4880	2280, 2282*	132.00
4801	3101B	132.00

<sup>\*</sup> For double locks order two

### **Miscellaneous**

MODEL	PRODUCT	LIST PRICE
301000	180 Piece Hardware Kit - An assortment of commonly used hardware for DynaLock electromagnetic locks. For 2000/3000 Series.	132.00
301238	Hardware Kit. For 3101/3101B Series.	121.00
4920 4930 4940	Metal Template for Model 2011. Metal Template for Model 3000. Metal Template for Model 3101B.	145.00 252.00 157.00
4951	Concrete/Wood Bracket for 2011/3000LC Size: 1-1/2"D x 1/2"H x 11"L	76.00

### **Top Jamb Conversion Kits**


Kits convert 2000, 3000 and 2280 Series locks to top jamb mounting applications on inswing doors. All kits include "Z" armature bracket(s) and mounting hardware. 2000 and 2280 kits also include "L" lock conversion bracket.


MODEL	PRODUCT	LIST PRICE
TJ20	Converts 2011 to 2011-TJ20	196.00
TJ21	Converts 2012 to 2012-TJ21	222.00
TJ22	Converts 2022 to 2022-TJ22	325.00
TJ30	Converts 3000 to 3000-TJ30	155.00
TJ31	Converts 3001 to 3001-TJ31	180.00
TJ32	Converts 3002 to 3002-TJ32	248.00
TJ80	Converts 2280 to 2280-TJ80	121.00
TJ82	Converts 2282 to 2282-TJ82	243.00


Note: See page 49 for available special finishes on above kits and brackets.

# Mounting Accessories



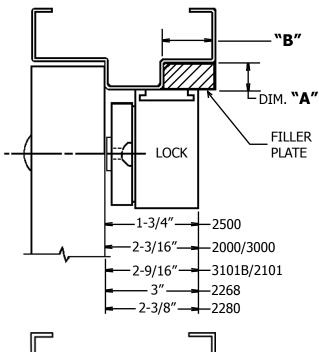

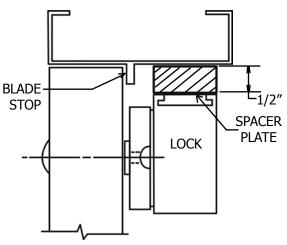

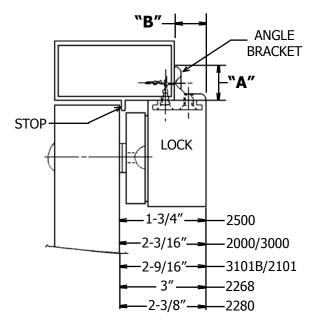


Prices Effective January 1, 2011

# Filler & Spacer Plates Angle Brackets


### **4000 Series Filler Plates**

Filler plates facilitate the mounting of electromagnetic locks by extending the width of the door stop to provide an adequate mounting surface. Where required, select a Filler Plate equal in thickness to the height of the door stop (i.e. Dim. "A").

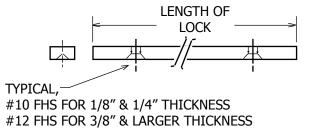

### **4000 Series Spacer Plates**


Spacer plates facilitate the mounting of electromagnetic locks by lowering the entire assembly 1/2", to clear a blade stop. All plates are pre-drilled for the corresponding lock series.



COMES WITH CORRESPONDING MOUNTING HARDWARE. HOUSING SCREWS MOUNT THROUGH SPACER PLATE INTO FRAME.

### **4000 Series Angle Brackets**

Angle Brackets facilitate the mounting of electromagnetic locks by extending the frame header area to provide an adequate mounting surface. Where required, select an Angle Bracket appropriate to accommodate the mounting footprint of the lock.

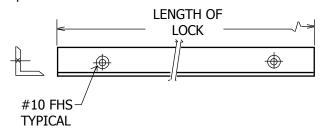

# **Mounting Accessories**



# **Filler Plates**

# **Single MagLocks**

SIZE A x B	<b>2000/3000/3101B</b> (11")	<b>2268-10/15</b> (14")	<b>2511</b> (10-1/2")	<b>2585</b> (8-1/2")	<b>2280</b> (12-3/4")	LIST
1/8 x 1-1/4	#4011	#4014	#4010	#4085	#4080	\$36.00
1/4 x 1-1/4	#4111	#4114	#4110	#4185	#4180	\$40.00
3/8 x 1-1/4	#4211	#4214	#4210	#4285	#4280	\$44.00
1/2 x 1-1/4	#4311	#4314	#4310	#4385	#4380	\$46.00
5/8 x 1-1/4	#4411	#4414	#4410	#4485	#4480	\$49.00
3/4 x 1-1/4	#4441	#4415	#4430	#4486	#4448	\$53.00

# **Double MagLocks**

SIZE A x B	<b>2022/3002/3121B</b> (22")	<b>2268-20</b> (25")	<b>2522</b> (21")	<b>2282</b> (25-1/2")	LIST	CUSTOM LENGTH L = LENGTH (Specify)
1/8 x 1-1/4	#4022	#4025	#4020	#4082	\$ 46.00	#4000-L \$42.00 Per. Ft.
1/4 x 1-1/4	#4122	#4125	#4120	#4182	\$ 51.00	#4100-L \$42.00 Per. Ft.
3/8 x 1-1/4	#4222	#4225	#4220	#4282	\$ 53.00	#4200-L \$42.00 Per. Ft.
1/2 x 1-1/4	#4322	#4325	#4320	#4382	\$ 55.00	#4300-L \$44.00 Per. Ft.
5/8 x 1-1/4	#4422	#4425	#4420	#4482	\$ 57.00	#4400-L \$44.00 Per. Ft.
3/4 x 1-1/4	#4442	#4426	#4450	#4449	\$ 63.00	#4440-L \$44.00 Per. Ft.

# **Spacer Plates**

2000/3000/3101B	2511	2522	2585	2268-10/15	2268-20	2280	2282
#4301	#4302	#4303	#4304	#4305	#4306	#4307	#4308
LIST \$65.00	LIST \$53.00	LIST \$61.00	LIST \$53.00	LIST \$53.00	LIST \$61.00	LIST \$53.00	LIST \$61.00

NOTE: For 2022, 3002, & 3121B order 2 Spacer Plates for each lock. All Spacer Plates are 1/2" thick and the same depth and length as the lock. Proper hardware packs included.

# **Angle Brackets**

# **Single MagLocks**

SIZE A x B	<b>2000/3000/3101B</b> (11")	<b>2268-10/15</b> (14")	<b>2511</b> (10-1/2")	<b>2585</b> (8-1/2")	<b>2280</b> (12-3/4")	LIST
1 x 1	#4511	#4514	#4510	#4585	#4580	\$49.00
1-1/2 x 1-1/2	#4611	#4614	#4610	#4685	#4680	\$55.00
1-1/2 x 2	#4711	#4714	#4710	#4785	#4780	\$71.00

# **Double MagLocks**

SIZE A x B	<b>2022/3002/3121B</b> (22")	<b>2268-20</b> (25")	<b>2522</b> (21")	<b>2282</b> (25-1/2")	LIST	CUSTOM LENGTH L = LENGTH (Specify)
1 x 1	#4522	#4525	#4520	#4582	\$60.00	#4500-L \$42.00 Per. Ft
1-1/2 x 1-1/2	#4622	#4625	#4620	#4682	\$76.00	#4600-L \$42.00 Per. Ft
1-1/2 x 2	#4722	#4725	#4720	#4782	\$87.00	#4700-L \$42.00 Per Ft





### **5025 Series Single Zone**

- Field selectable voltage output: 12VDC or 24VDC.
- Power output: 1 Amp @ 12/24VDC.
- Filtered and regulated voltage output.
- · Built-in battery charging circuit.
- Choice of 4 or 7 Amp/Hour battery back-up capacity.
- May be connected to fire alarm with N.C. contacts.
- 15" x 12" x 4" hinge cover steel enclosure with knockouts.

MODEL	PRODUCT	LIST PRICE
5025	Power Supply with direct output and built-in battery charging circuit.	219.00

OPTIONS		LIST PRICE
ATS	Anti-Tamper Switch - Signals opening of enclosure cover.	44.00
<b>BBU1-4</b>	Battery Back-up - 4 AH @ 12VDC, 1 battery.	66.00
BBU1-7	Battery Back-up - 7 AH @ 12VDC, 1 battery.	95.00
BBU2-4	Battery Back-up - 4 AH @ 24VDC, 2 batteries.	132.00
BBU2-7	Battery Back-up - 7 AH @ 24VDC, 2 batteries.	190.00
САВ	Cable Kit - For third party batteries (Included at no charge with all BBU options).	21.00
KLC	Key Locked Cover - Includes two keys.	38.00
PC	Power Cord - Six foot, pre-connected, 3-wire line cord with ground.	32.00

NYC MEA #23-92-E

# **Battery Back-Up** Time

TOTAL	BATTERY SIZE				
CURRENT DRAW	4AH	7AH			
0.25A	13.3hrs	23.3hrs			
0.5A	6.6hrs	11.7hrs			
0.75A	4.4hrs	7.8hrs			
1A	3.3hrs	5.8hrs			

NOTE: Estimated times shown. Battery condition, temperature, and other factors may affect performance.

# **Power Supply Lock Capacity Chart**

				. ,			
OUTPUT	MAX	LOCKING DEVICE					
VOLTAGE	LOAD	1300	2511	2011/3000	2268-10	3006	3101B
12VDC	1A	1	1	2	1	1	1
24VDC	1A	2	3	4	2	3	1
RATINGS	PER LOCK	0.85A@12V 0.45A@24V	0.50A@12V 0.25A@24V	0.42A@12V 0.21A@24V	0.68A@12V 0.35A@24V	0.50A@12V 0.30A@24V	0.75A@12V 0.50A@24V







NYC MEA #23-92-E

### 5500 Series Multi Zone

- Field selectable voltage output: 12VDC or 24VDC.
- Power output: 3 Amps @ 12VDC / 2 Amps @ 24VDC.
- · Filtered and regulated voltage output.
- · Built-in battery charging circuit.
- Choice of 4 or 7 Amp/Hour battery back-up capacity.
- Fire alarm tie-in capability (with FAC option).
- 15" x 12" x 4" hinge cover steel enclosure with knockouts.
- Power on LED.
- Direct power output or choice of 5 or 10 zone distribution/expansion boards.

MODEL	PRODUCT	LIST PRICE
5500	Power Supply with direct output and built-in battery charging circuit.	475.00

# BATTERY BACK-UP TIME

TOTAL	BATTERY SIZE			
CURRENT DRAW	4AH	7AH		
0.25A	13.3hrs	23.3hrs		
0.5A	6.6hrs	11.7hrs		
0.75A	4.4hrs	7.8hrs		
1A	3.3hrs	5.8hrs		
1.25A	2.7hrs	4.7hrs		
1.5A	2.2hrs	3.9hrs		
1.75A	1.9hrs	3.3hrs		
2A	1.7hrs	2.9hrs		
2.25A	1.5hrs	2.6hrs		
2.5A	1.3hrs	2.3hrs		
2.75A	1.2hrs 2.1h			
3A	1.1hrs	1.9hrs		

NOTE: Estimated times shown. Battery condition, temperature, and other factors may affect performance.

OPTIONS	l l	LIST PRICE
ATS	Anti-Tamper Switch - Signals opening of enclosure cover.	44.00
BBU1-4	Battery Back-up - 4 AH @ 12VDC, 1 battery.	66.00
BBU1-7	Battery Back-up - 7 AH @ 12VDC, 1 battery.	95.00
BBU2-4	Battery Back-up - 4 AH @ 24VDC, 2 batteries.	132.00
BBU2-7	Battery Back-up - 7 AH @ 24VDC, 2 batteries.	190.00
САВ	Cable Kit - For third party batteries (Included at no charge with all BBU options).	21.00
CM	Control Module - Plug-in (Requires DB5 or DB10)	87.00
CMTD	Control Module w/Time Delay - Plug-in, 0-80 second relock delay (Requires DB5 or DB10).	99.00
DB5	Distribution Board - 5 zone fused, accepts up to 5 CM or CMTD modules.	103.00
DB10	Distribution Board - 10 zone fused, accepts up to 10 CM or CMTD modules.	131.00
FAC	Fire Alarm Module - Plug-in (One per supply).	63.00
FACMR	Fire Alarm Module with Manual Reset.	190.00
ILB	Interlock Logic Board - Four DPDT relays.	106.00
KLC	Key Locked Cover - Includes two keys.	38.00
PC	Power Cord - Six foot, pre-connected, 3-wire line cord with ground.	32.00

# **Power Supply Lock Capacity Chart**

OUTPUT	MAX	LOCKING DEVICE					
VOLTAGE	LOAD	1300	2511	2011/3000	2268-10	3006	3101B
12VDC	3 <b>A</b>	3	5	6	4	5	3
24VDC	2A	4	7	8	5	6	3





5600



NYC MEA #23-92-E

### **5600 Series Multi Zone**

- Two available voltage outputs: 12VDC or 24VDC. Specify when ordering.
- Power output: 10 Amps @ 12VDC / 5 Amps @ 24VDC.
- Filtered and regulated voltage output.
- Built-in battery charging circuit.
- Choice of 4 or 7 Amp/Hour battery back-up capacity.
- Fire alarm tie-in capability (with FAC option).
- 15" x 12" x 4" hinge cover steel enclosure with knockouts.
- · Power on LED.
- Direct power output or choice of 5 or 10 zone distribution/expansion boards.

MODEL	PRODUCT	LIST PRICE
5600-12	Power Supply, 12VDC @ 10Amps	659.00
5600-24	Power Supply, 24VDC @ 5 Amps	659.00

# Battery Back-Up Time

TOTAL	BATTERY SIZE				
CURRENT DRAW	4AH	7AH			
1A	3.3hrs	5.8hrs			
2A	1.7hrs	2.9hrs			
3A	1.1hrs	1.9hrs			
4A	0.8hrs	1.4hrs			
5A	0.7hrs	1.2hrs			
6A	0.6hrs	1hr			
7A	0.5hrs	0.8hrs			
8A	0.4hrs	0.7hrs			
9A	0.4hrs	0.6hrs			
10A	0.3hrs	0.5hrs			

NOTE: Estimated times shown. Battery condition, temperature, and other factors may affect performance.

OPTIONS		LIST PRICE
ATS	Anti-Tamper Switch - Signals opening of enclosure cover.	44.00
BBU1-4	Battery Back-up - 4 AH @ 12VDC, 1 battery.	66.00
BBU1-7	Battery Back-up - 7 AH @ 12VDC, 1 battery.	95.00
BBU2-4	Battery Back-up - 4 AH @ 24VDC, 2 batteries.	132.00
BBU2-7	Battery Back-up - 7 AH @ 24VDC, 2 batteries.	190.00
CAB	Cable Kit - For third party batteries (Included at no charge with all BBU options).	21.00
CM	Control Module - Plug-in (Requires DB5 or DB10)	87.00
CMTD	Control Module w/Time Delay - Plug-in, 0-80 second relock delay (Requires DB5 or DB10).	99.00
DB5	Distribution Board - 5 zone fused, accepts up to 5 CM or CMTD modules.	103.00
DB10	Distribution Board - 10 zone fused, accepts up to 10 CM or CMTD modules.	131.00
FAC	Fire Alarm Module - Plug-in (One per supply).	63.00
FACMR	Fire Alarm Module with Manual Reset.	190.00
ILB	Interlock Logic Board - Four DPDT relays.	106.00
KLC	Key Locked Cover - Includes two keys.	38.00
PC	Power Cord - Six foot, pre-connected, 3-wire line cord with ground.	32.00

# **Power Supply Lock Capacity Chart**

OUTPUT	MAX	LOCKING DEVICE						
VOLTAGE	LOAD	1300	2511	2011/3000	2268-10	3006	3101B	
12VDC	10A	10	19	23	14	19	13	
24VDC	5A	10	19	23	13	16	9	

PATINGS DED INCK   STORTE -   STORTE -	0.42A@12V	0.68A@12V	0.50A@12V	0.75A@12V
	0.21A@24V	0.35A@24V	0.30A@24V	0.50A@24V





# **5200 Series Open Transformers**

MODEL	PRODUCT	LIST PRICE
5212	Open Transformer, 120/12 VAC, 2 Amp	74.00
5213	Open Transformer, 120/12 VDC, 2 Amp	95.00
5224	Open Transformer, 120/24 VAC, 2 Amp	74.00
5225	Open Transformer, 120/24 VDC, 2 Amp	95.00



5324

# 5300 Series Plug-In Transformers

MODEL	PRODUCT	LIST PRICE
5312	Plug-in Transformer, 120/12 VAC, 3 Amp	38.00
5313	Plug-in Transformer, 120/12 VDC, 3 Amp	51.00
5324	Plug-in Transformer, 120/24 VAC, 1.5 Amp	38.00
5325	Plug-in Transformer, 120/24 VDC, 1.5 Amp	51.00



5400

# **5400 Series Battery Back-Up Power Supply**

MODEL	PRODUCT	LIST PRICE
5400	Power Supply, 1 Amp @ 12VDC only, with 4 AH battery back-up and charger.	238.00

Wire Size Selection Charts

Load Current At 24V							
WIRE RUN (FT)	0.25A	0.5A	0.75A	1A	1.25A	1.5A	2A
100	18	18	18	18	16	16	14
150	18	18	16	16	14	14	12
200	18	18	16	14	14	12	12
250	18	16	14	14	12	12	12
300	18	16	14	12	12	12	-
400	18	14	12	12	-	-	-
500	16	14	12	-	-	-	-
750	14	12	-	-	-	-	-
1000	14	-	-	-	-	-	-

Load Current At 12V							
WIRE RUN (FT)	0.25A	0.5A	0.75A	1A	1.25A	1.5A	2A
100	18	18	16	14	14	12	12
150	18	16	14	12	12	12	-
200	16	14	12	12	-	-	-
250	16	14	12	-	-	-	-
300	16	12	12	-	-	-	-
400	14	12	-	-	-	-	-
500	14	-	-	-	-	-	-
750	12	-	-	-	-	-	-
1000	-	-	-	-	-	-	-







6010 6020

### **6000 Series Monitor Panels**

6000 Monitor Panels provide bi-color LED's, red/green, operating on 12 or 24 VDC. Mounted on brushed stainless steel US32D switch plate.

MODEL	PRODUCT	LIST PRICE
6010	One Bi-Color LED, Red/Green, 12/24VDC	64.00
6020	Two Bi-Color LED's, Red/Green, 12/24VDC	98.00

OPTIONS		LIST PRICE
DBL-AUD	Two Gang Plate with Audible Sounder - 1-28VDC.	24.00
NR SF	Narrow Plate - 1-3/4" wide, substitute. Special Finishes - Standard finish US32D. See page 47.	6.00

# EXIT O



6115 6125

# 6000 Series Pushbuttons

6000 Series controls provide a popular selection of request to exit (REX) controls in multiple switching configurations. Monitoring is accomplished with optional illuminated or audible indicators.

Standard finish - Brushed Stainless Steel US32D.

Standard button color - Green.

All switches SPDT contacts.





6135 6145

MODEL	PRODUCT	LIST PRICE
6115M	One Pushbutton, 1 Gang, Momentary	78.00
6115A	One Pushbutton, 1 Gang, Alternate Action	80.00
6125M	Two Pushbuttons, 1 Gang, Momentary	153.00
6125A	Two Pushbuttons, 1 Gang, Alternate Action	158.00
6135M	Three Pushbuttons, 1 Gang, Momentary	208.00
6135A	Three Pushbuttons, 1 Gang, Alternate Action	214.00
6145M	Four Pushbuttons, 2 Gang, Momentary	273.00
6145A	Four Pushbuttons, 2 Gang, Alternate Action	285.00

OPTIONS		LIST PRICE
AUD	Audible Sounder - 1-28VDC (Requires DBL option).	18.00
DBL	Two Gang Plate - 4-9/16" wide, for options.	6.00
ILM	Illuminated Pushbutton - Specify 12 or 24VDC (per button).	10.00
LED	Bi-Color LED - Red/Green, 12/24VDC.	32.00
NR	Narrow Plate - 1-3/4" wide, substitute.	6.00
P2 SF	Additional set of SPDT contacts (per button). Special Finishes - See page 49.	40.00
WPC	Weather Proof Cover - For single gang 6115 only.	16.00
ATS	Anti-Tamper Switch	42.00





1-5/8" Dia. Plastic Red Button



1-5/8" Dia. Plastic Red Button Marked EXIT

### **6000 Series Pushbuttons**

6000 Series controls provide a popular selection of request to exit (REX) controls in multiple switching configurations. Monitoring is accomplished with optional illuminated or audible indicators.

Standard finish - Brushed Stainless Steel US32D.

Standard button color - Red (green available).

MODEL	PRODUCT	LIST PRICE
6210 6220 6230	Palm Switch, A-A, SPDT Palm Switch, A-A, DPDT Palm Switch, MOM, FORM Z	126.00 176.00 82.00
6211 6221 6231	Palm Switch, marked "EXIT", A-A, SPDT Palm Switch, marked "EXIT", A-A, DPDT Palm Switch, marked "EXIT", MOM, FORM Z	130.00 180.00 86.00

OPTIONS		LIST PRICE
AUD	Audible Sounder - 1-28VDC (Requires DBL option).	18.00
DBL	Two Gang Plate - 4-9/16" wide, for options.	6.00
LED	Bi-Color LED - Red/Green, 12/24VDC.	32.00
NR	Narrow Plate - 1-3/4" wide, substitute.	6.00
SF	Special Finishes - See page 49.	
GRN	Green Button	N/C
ATS	Anti-Tamper Switch	42.00
CB-NO CB-NC	Contact Block - 6230 & 6231 may have one additional set of momentary NO or NC contacts.	12.00

# **NOTES:**

**A-A** Alternate Action (Maintained)

**MOM** Momentary Action

SPDT Single Pole Double Throw
DPDT Double Pole Double Throw

FORM Z Single Pole Double Throw, Double Break





LIST PRICE

90.00

276.00

357.00

357.00

### **6000 Series Pushbuttons**

**MODEL** 

6275



6270 2" Square Plastic **Green Button Black EXIT** Illuminated

**PRODUCT** 6270 Pushbutton, 2" Sq. MOM, SPDT, 12/24VDC



6275 3/8" Dia. **SST Button** With Pneumatic **Time Delay** 



6280 Pushbutton, 1" Dia. SST MOM, SPDT 160.00 6282 Pushbutton, 1" Dia. SST A-A, SPDT 164.00

Pushbutton, 3/8" Dia. 1-60 Sec. PTD, FORM Z



6280,6282 1" Dia. SST Button **Heavy Duty** Vandal Resistant 6290

Palm Switch, 1-5/8" Dia. FORM Z, PTD 30 Sec. Min., NFPA 101, 2003

Paragraph 7-2.1.6.2



6291 Palm Switch, 1-5/8" Dia. FORM Z, PTD

30 Sec. Min., City of Denver Policy Statement 1994, Paragraph 4



6290 1-5/8" Dia. Plastic **Red Button Marked EXIT** NFPA 101 Code

6300

50.00 Audible, 6-28VDC



6291 1-5/8" Dia. **Plastic Red Button Marked UNLOCK DOOR Denver Code** 

LIST PRICE **OPTIONS LED** Bi-Color LED - Red/Green, 12/24VDC 32.00 Narrow Plate - 1-3/4" wide. Available on NR 6.00 6275, 6280, 6282, and 6290 only. Special Finishes - Standard finish US32D. See SF

page 49. **Anti-Tamper Switch** 

42.00 **ATS** 

Fax: 1.860.585.0338

6300 1-3/4" Dia. Audible 90 dB @ 30 cm NOTES:

A-A Alternate Action (Maintained) MOM **Momentary Action** 

**SPDT** Single Pole Double Throw **DPDT** Double Pole Double Throw

Single Pole Double Throw, Double Break FORM Z

**PTD** Pneumatic Time Delay

Stainless Steel SST



©2011 DynaLock Corp.



6171



6172



6173



6174



6175

Prices Effective January 1, 2011



6176

ALL MODELS HAVE WHITE BUTTON WITH GREEN LED BACKLIGHT ILLUMINATED

## **6170 Series Weatherproof Pushbutton**

Commercial grade weatherproof pushbutton. Button is 3/4" diameter white thermoplastic raised dome, rated IP68 water-tight (up to 1 meter), IP64 moisture-proof, and IP64 dust-tight. Single gang plate, includes weatherproof faceplate gasket and tamper-resistant faceplate screws. Green LED backlit button on all models, field selectable 12/24 VDC. All models are momentary-action SPDT-Double Break (FORM Z)

Contact Rating: 3A @ 115VAC

Operating temperature rating: -67°F to +185°F

MODEL	PRODUCT	LIST PRICE
6171 6172 6173 6174 6175 6176	Blank Faceplate Faceplate Silkscreened "EXIT" Faceplate Silkscreened "EXIT/SALIDA" Faceplate Silkscreened "EXIT/SORTIE" Faceplate Silkscreened "PUSH TO UNLOCK" Faceplate Silkscreened "PUSH TO OPEN"	140.00 150.00 150.00 150.00 150.00
OPTIONS		
DDV	Weatherproof Surface Back Box 25/ " doop	40.00

BBX	Weatherproof Surface Back Box - 25/8" deep	40.00
CSF	Custom Silkscreened Faceplate - Consult	
	factory for price and delivery	
SF	Special Finish Faceplate - US32D standard,	
	see page 49 for other finishes	
ATS	Anti-Tamper Switch	42.00

Tel: 1.877.DYNALOCK Page 33 Fax: 1.860.585.0338








# **6500 Series High Visibility Pushplates**

6500 Series Pushplates are double-gang, heavy duty egress controls machined from solid aluminum featuring electroluminescent illuminated signage. Multiple switching configurations and finishes are available. All models are low profile (13/16" projection from wall) and tamper resistant. *Consult factory for custom signage*.

Standard finish - Satin Aluminum US28. Current Draw: 30mA @ 12 or 24VDC

PTD Contact Rating: 10A @ 125VAC / All Others: 6A @ 125VAC

### **MODEL SELECTION**

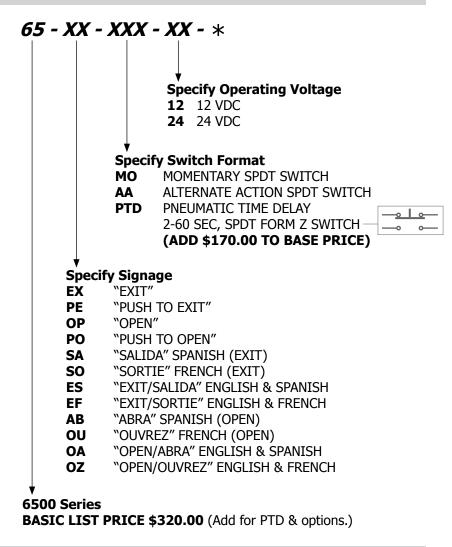

* OPTIONS		LIST PRICE
DP	DPDT Switch. Not available with PTD option.	10.00
SF	Special Finishes - US28 standard. US3, US4, US10, US13, US10B, US19, US26 available.	70.00
CS	Custom Signage - Please consult factory.	

Lamp illuminates indefinitely. Optimal brightness up to 10,000 hours (continuous usage). Field replacements are available, consult factory.



ETNICH

US32D

US32D

FORM C RELAY (5A @ 125V)

35.00

30.00

LICT DDICE

### 6610 / 6610E One-Gang Halo-Lighted Piezo REX Push Button



DynaLock's 6610/6610E is a heavy duty single gang, halo-lighted piezo REX push button. Features include selectable illumination (green/red/no illumination), Form C relay outputs and single finger touch activation. This illuminated switch is non-sparking, non-magnetic and corrosion resistant, making it a perfect fit for industrial, high risk environments as well as access control systems and direct door control.

6610

MODEL

66BB-10

66BB-20

10-24VDC

MODEL	PRODUCI	1 1141311	LIST PRICE
6610	Single Gang, Blank Faceplate, 10-24VDC	US32D	140.00
6610E	Single Gang, "Push To Exit" Faceplate, 10-24VDC	US32D	140.00



6610E

# 6620 / 6620E Narrow Mullion Halo-Lighted Piezo REX Push Button

DDODUCT

DynaLock's 6620/6620E is a heavy duty narrow, halo-lighted piezo REX push button. Features include selectable illumination (green/red/no illumination), Form C relay outputs and single finger touch activation. This illuminated switch is non-sparking, non-magnetic and corrosion resistant, making it a perfect fit for industrial, high risk environments as well as access control systems and direct door control.



**MODEL PRODUCT FINISH** LIST PRICE 6620 Narrow, Blank Faceplate, 10-24VDC US32D 130.00 6620E Narrow, "Exit" Faceplate, 10-24VDC US32D 130.00

6620

OPTIONS	LIST PRICE

Surface Back Box, Single Gang

Surface Back Box, Narrow

15mA @ 24VDC (STANDBY)



OPERATING VOLTAGE	CURRENT INPUT	CURRENT INPUT	VOLTAGE OUTPUT

140mA @ 24VDC (MAX)

6620E





# **Single Gang**



Single Gang Recessed



**Narrow** 



Narrow Recessed

# 6700/6800 Series Pushplates

6700 & 6800 Series Pushplates are heavy duty egress controls machined from solid aluminum with engraved "PUSH TO EXIT" signage. Multiple switching configurations and finishes are available. Narrow recessed models are specifically designed for installation in aluminum store front frames, requiring minimal cut-out/preparation. All momentary models feature "all active" operation. Consult factory for special engraving.

Standard finish - Satin Aluminum US28 PTD Contact Rating: 10A @ 125VAC

All Others: 6A @ 125VAC

MODEL	PRODUCT	LIST PRICE
6700	Single Gang 1-60 Sec. PTD, FORM Z	366.00
6710	Single Gang A-A, SPDT	120.00
6720	Single Gang A-A, DPDT	158.00
6730	Single Gang MOM, SPDT	120.00
6740	Single Gang MOM, DPDT	158.00
6750	Single Gang, Recessed 1-60 Sec. PTD, FORM Z	380.00
6751	Single Gang, Recessed A-A, SPDT	145.00
6752	Single Gang, Recessed A-A, DPDT	185.00
6753	Single Gang, Recessed MOM, SPDT	140.00
6754	Single Gang, Recessed MOM, DPDT	180.00
6800	Narrow 1-60 Sec. PTD, FORM Z	366.00
6810	Narrow A-A, SPDT	116.00
6820	Narrow A-A, DPDT	152.00
6830	Narrow MOM, SPDT	116.00
6840	Narrow MOM, DPDT	152.00
6850	Narrow, Recessed 1-60 Sec. PTD, FORM Z	375.00
6851	Narrow, Recessed A-A, SPDT	140.00
6852	Narrow, Recessed A-A, DPDT	180.00
6853	Narrow, Recessed MOM, SPDT	135.00
6854	Narrow, Recessed MOM, DPDT	175.00

OPTIONS		LIST PRICE
SF	Special Finishes - US28 standard. US3, US4, US10, US13, US10B, US19, US26 available.	70.00

### NOTES:

A-A	Alternate Action (Maintained)
MOM	Momentary Action
SPDT	Single Pole Double Throw
DPDT	Double Pole Double Throw
PTD	Pneumatic Time Delay
FORM Z	Single Pole Double Throw, Double Break

# Access/Egress Controls





#### **Single Gang**



Single Gang Recessed



**Narrow** 



Narrow Recessed

#### 6705/6805 Series Handicapped Pushplates

6705 & 6805 Series Handicapped Pushplates are heavy duty egress controls machined from solid aluminum with blue engraved handicapped symbol. Multiple switching configurations and finishes are available. Narrow recessed models are specifically designed for installation in aluminum store front frames, requiring minimal cut-out/preparation. All momentary models feature "all active" operation. Consult factory for special engraving. Standard finish - Satin Aluminum US28

PTD Contact Rating: 10A @ 125VAC

All Others: 6A @ 125VAC

MODEL	PRODUCT	LIST PRICE
6705	Single Gang 1-60 Sec. PTD, FORM Z	355.00
6715	Single Gang A-A, SPDT	120.00
6725	Single Gang A-A, DPDT	160.00
6735	Single Gang MOM, SPDT	115.00
6745	Single Gang MOM, DPDT	155.00
6755	Single Gang, Recessed 1-60 Sec. PTD, FORM Z	380.00
6765	Single Gang, Recessed A-A, SPDT	145.00
6775	Single Gang, Recessed A-A, DPDT	185.00
6785	Single Gang, Recessed MOM, SPDT	140.00
6795	Single Gang, Recessed MOM, DPDT	180.00
6805	Narrow 1-60 Sec. PTD, FORM Z	350.00
6815	Narrow A-A, SPDT	115.00
6825	Narrow A-A, DPDT	155.00
6835	Narrow MOM, SPDT	110.00
6845	Narrow MOM, DPDT	150.00
6855	Narrow, Recessed 1-60 Sec. PTD, FORM Z	375.00
6865	Narrow, Recessed A-A, SPDT	140.00
6875	Narrow, Recessed A-A, DPDT	180.00
6885	Narrow, Recessed MOM, SPDT	135.00
6895	Narrow, Recessed MOM, DPDT	175.00

OPTIONS		LIST PRICE
SF	Special Finishes - US28 standard. US3, US4,	70.00

US10, US13, US10B, US19, US26 available.

#### **NOTES:**

A-A	Alternate Action (Maintained)
MOM	Momentary Action
SPDT	Single Pole Double Throw
DPDT	Double Pole Double Throw
PTD	Pneumatic Time Delay
FORM Z	Single Pole Double Throw, Double Break

# **Specialty Exit Controls**





#### **Double Gang**

#### **6901 Series Pushplates**

DynaLock Specialty Exit Controls provide "out of the box" solutions to meet specific codes or mandates governing egress requirements within a facility, municipality or region.

6901 Series are tamper resistant, heavy duty double gang pushplates machined from solid aluminum. All models with "PUSH TO EXIT" signage engraved. Lettering is black with 1/8" stroke and 1" height (minimum). All momentary models feature "all active" operation. Standard finish - Satin Aluminum US28

PTD Contact Rating: 10A @ 125VAC / UL

All Others: 6A @ 125VAC / UL



Double Gang Recessed

MODEL	PRODUCT	LIST PRICE
6901 6911 6921 6931	Double Gang 1-60 Sec. PTD, FORM Z Double Gang A-A, SPDT Double Gang A-A, DPDT Double Gang MOM, SPDT	397.00 215.00 240.00 210.00
6941 6951 6961 6971 6981 6991	Double Gang MOM, DPDT  Double Gang, Recessed 1-60 Sec. PTD, FORM Z Double Gang, Recessed A-A, SPDT Double Gang, Recessed A-A, DPDT Double Gang, Recessed MOM, SPDT Double Gang, Recessed MOM, DPDT	235.00 422.00 240.00 265.00 235.00 260.00

OPTIONS		LIST PRICE
SF	Special Finishes - US28 standard. US3, US4, US10, US13, US10B, US19, US26 available.	70.00

#### **NOTES:**

**A-A** Alternate Action (Maintained)

**MOM** Momentary Action

**SPDT** Single Pole Double Throw Double Pole Double Throw PTD Pneumatic Time Delay

**FORM Z** Single Pole Double Throw, Double Break

<u>-0 | 0-</u>

# **Specialty Controls**



28.00



#### **6335 Series Pushbuttons**

Station controls furnished in compact, surface-mounted enclosures. Designed to be concealed under a desk or in a similar installation.

Dimensions: 1"H x 2-1/4"W x 2"D

MODEL	PRODUCT	LIST PRICE
6335 6336 6337 6338	<ol> <li>Pushbutton, SPDT Maintained Contact</li> <li>Pushbutton, SPDT Momentary Contact</li> <li>Pushbuttons, SPDT Maintained Contacts</li> <li>Pushbuttons, SPDT Momentary Contacts</li> </ol>	112.00 109.00 150.00 132.00
OPTIONS		LIST PRICE
P2 P4 ILM	Upgrade to DPDT contacts (6335/6336 only). Upgrade to DPDT contacts (6337/6338 only). Illuminated Pushbutton - Specify 12 or 24VDC (6335/6336 only).	30.00 60.00 14.00

Illuminated Pushbuttons - Specify 12 or 24VDC

#### **6350 Series Monitor Station**

(6337/6338 only).

ILM<sub>2</sub>

Four zone monitor station is designed to work in conjunction with up to four Series 3101B delay egress systems. Each 6350 is mounted on a standard two gang plate and includes four bi-color LED's and one sounder with mute switch, to visually and audibly signal delay egress status at a remote location. For full functioning all locks connected to the 6350 require the Dynastat option.

MODEL	PRODUCT	LIST PRICE
6350	Four Zone Monitor Station for Delay Egress Systems. Furnished with a 5312 Transformer.	400.00

#### 6370 Series Control & Monitor Station

Single zone control & monitor station is designed for use with a separate, component style delay egress system. It includes audible and visual monitoring of lock and delay egress status. Reset and release functions are provided by keyswitch. Each 6370 is mounted on a standard two gang plate. System requirements are outlined on page 21.

MODEL	PRODUCT	LIST PRICE
6370	Single Zone Control & Monitor Station for Delay Egress Systems.	160.00



6337

6350



6370





#### 6451 Series Exit Sensor Bar

Non-latching, non-handed exit sensor bar for use with electromagnetic lock to provide immediate, single-motion egress. Non-mechanical optical sensors require no adjustment and provide DPDT output contacts. A mechanical switch is also built-in as a redundant back-up release. Available in three standard lengths, easily cut in the field for custom width doors. Minimum travel, positive stops and metal end caps provide true vandal and wear resistance. Furnished with power transfer cable from door to frame.

Not to be used with electric deadbolt locks.

Current Draw: 0.100 Amps @ 12/24 VDC/VAC

Relay: DPDT / 5 Amps @ 30 Volts

c UL US
LISTED

NYC MEA #23-92-E

**CSFM** 

MODEL	PRODUCT	LIST PRICE
6451-36	Exit Sensor Bar, For 36" Door, US28 Finish	380.00
6451-42	Exit Sensor Bar, For 42" Door, US28 Finish	380.00
6451-48	Exit Sensor Bar, For 48" Door, US28 Finish	380.00

NOTE: All models for doors with 5/8" or less frame stop. Actual bar length is 2" less than width of door x 2-3/8"H x 2-7/16"D Distance between mounting holes is 2-3/4" less than width of door.



PTE OPTION

OPTIONS		LIST PRICE
CAB64 TSB	Cable Kit - 16 ft., 8 cond., to facilitate wiring.  Mounting pads modified to match Securitron®	38.00 17.00
SF	TSB mounting footprint.  Special Finishes - Standard finish US28. Also available in anodized dark bronze (US10B) or	40.00
WDK	satin brass (US4), to match door trim. Wood Door Kit - (4) #10 sex nuts and bolts for	17.00
	wood doors 1-3/4" to 2-1/4" thick.	
DMB	•	duct (70.00)
PTE	PUSH TO EXIT Engraved Signage - 1" high, 1/8" stroke, red filled.	60.00
CLC	Custom Length Cut - Specify desired overall finished length of Exit Sensor Bar.*	21.00

\* TIP: To calculate Custom Length Cut, subtract 3/4" from the distance between door stops (D).



Fax: 1.860.585.0338

# Keyswitches





#### 7001xCYL



7001xNRxCYL



7050

#### **7000 Series Keyswitches**

Keyswitches may be used to control electric locks, shunt or activate security panels, consoles or any similar requirements. The assembly is supplied with face plate, bracketry, cylinder locknut and one or two switches depending on model ordered. The user typically supplies the mortise cylinder and cam when master keying a system. Models 7050 & 7051 do not require a cylinder.

Switch contacts rated 6 Amps @ 125VAC and are available momentary or maintained, SPDT or DPDT. Switch assembly requires 1-1/2" depth clearance and is shipped on single, double or narrow gang plates.

Standard Finish: US32D

Cylinder Requirements: 1-1/8" or 1-1/4" Mortise Cylinder with "bat" type cam.

MODEL	PRODUCT	LIST PRICE
7001	Maintained, (1) SPDT	127.00
7002	Momentary, (1) SPDT	116.00
7003	Maintained, (2) SPDT	155.00
7004	Momentary, (2) SPDT	133.00
7005	Momentary/Maintained, 1 Each SPDT	143.00
7021	Maintained, (1) DPDT	154.00
7022	Momentary, (1) DPDT	143.00
7023	Maintained, (2) DPDT	199.00
7024	Momentary, (2) DPDT	177.00
7025	Momentary/Maintained, 1 Each DPDT	184.00
7035	Elec. Time Delay, 0-60 Sec. SPDT, 2 Gang	266.00
7050	3101B Type, Momentary/Maintained	89.00
7051	3101B Type, Momentary/Momentary	127.00

OPTIONS		LIST PRICE
* ATS	Anti-Tamper Switch	42.00
• AUD	Audible Sounder - 1-28VDC (Requires DBL option).	18.00
• CYL	Mortise Cylinder - 1-1/4" long w/cam, 2 keys.	38.00
DBL	Two Gang Plate - 4-9/16" wide, for options.	6.00
KEY	Key, Extra (Order with CYL option)	6.00
LED	Bi-Color LED - Red/Green, 12/24VDC.	32.00
NR	Narrow Plate - 1-3/4" wide, substitute.	6.00
PBA	Pushbutton - 6115A type (Requires DBL option)	. 59.00
PBM	Pushbutton - 6115M type (Requires DBL option)	. 59.00
。 SF 。	Special Finishes - Standard finish US32D. See page 49.	
WPC	Weatherproof Cover - Single gang only.	16.00

Notes: \* Not available with NR option.

- Not available on 7035.
- All cylinders keyed alike.

# Miscellaneous Electronics





7075



7080



7086



7088

#### 7075 Series Break Glass Exit Stations

Break glass assembly provides auxiliary method of releasing egress doors in an emergency situation. The assembly may be ordered in three versions: standard, standard with LED indicator or standard with audible.

Size: 6-3/4" x 4-1/2"

Contacts: SPDT-DB (FORM Z), MOM rated 6 Amps @ 125VAC -

Furnished with 5 spare glass lenses.

MODEL	PRODUCT	LIST PRICE
7075	Break Glass, Standard	255.00
7076	Break Glass, with Bi-Color LED, Red/Green, 12/24VDC	289.00
7077	Break Glass, with Audible Sounder, 1-28VDC, 1-28VDC	300.00
7078	Spare Contact Block, SPDT	65.00
7079	Spare Lenses, 5 Pk.	44.00

#### 7080 Series Adjustable Time Delay Module

Compact, in-line time delay module provides an adjustable relock delay for an electric lock controlled by a momentary normally-closed access/egress device.

Size: 5/8"W x 2"L x 9/16"D

Input Power: 12-30 VAC/VDC, Contacts: SPDT rated 1 Amp @ 30VDC

Delay Adjustment Range: 0-60 Seconds

MODEL	PRODUCT	LIST PRICE
7080	Adjustable Time Delay Module	69.00

#### **7086 Series Programmable Digital Timer**

365 day/24 hour digital timer provides automated control of electric locks. Programmable for up to 50 weekly/daily events and 10 holidays. Operates on 12 or 24 VAC/VDC @ 0.05A.

Size: 3"W x 5.25"L x 1"D

Contacts: SPDT rated 10 Amps @ 120VAC

MODEL	PRODUCT	LIST PRICE
7086	Programmable Digital Timer	354.00

#### 7088 Prewired Rectifier

MODEL	PRODUCT	LIST PRICE
7088	1 Amp Prewired Rectifier Module	21.00

111 Tel: 1.877.DYNALOCK Page 42 Fax: 1.860.585.0338 ©2011 DynaLock Corp.

# Stand Alone Digital Keypads





**MODEL 7300** 



**MODEL 7350** 



**MODEL 7400** 



**MODEL 7450** 

#### 7300/7350 Stand Alone Digital Keypads

These rugged, vandal resistant all metal piezoelectric keypads are designed for access solutions in harsh industrial, institutional and commercial environments. A user-friendly setup menu makes programming and use a very simple task for end-user's. Both feature audio and visual recognition as well as multiple inputs and outputs for a wide array of functions, auxiliary modes and 500 user codes with three access levels for each. Includes keypad, installation kit, 3 foot wiring cable and a self-adhesive mounting template.

MODEL	PRODUCT	LIST PRICE
7300	Single Gang Box Mounting-3x4 Matrix Keypad	300.00
7350	Narrow Mullion Design-2x6 Matrix Keypad	285.00

#### 7400/7450 Stand Alone Digital Keypads

These durable, high impact, polycarbonate keypads are designed for access solutions for indoor and outdoor residential, commercial and institutional applications. A user-friendly setup menu makes programming and use very simple for end-user's. Both feature audio and visual recognition, red backlit keys for enhanced visibility as well as multiple inputs and outputs for a wide array of functions, auxiliary modes and 500 user codes with three access levels for each. Includes keypad, installation kit, 3 foot wiring cable and a self-adhesive mounting template.

MODEL	PRODUCT	LIST PRICE
7400	Single Gang Box Mounting-3x4 Matrix Keypad	150.00
7450	Narrow Mullion Design-2x6 Matrix Keypad	142.00

#### **Common Features - All Models**

- 500 User Pin Code Capacity
- 4 to 8 Digit Programmable Pin Codes
- 3 User Levels, 3 Access Levels Per User
- Waterproof and Dust Resistant (Meets IP65)
- Two SPDT Form "C" Relay Outputs
- REX and Auxiliary Inputs
- Two Tri-Color LED and Audible Indicators
- Built-in Optical Back Tamper Sensor
- Operates on 12-24VDC or 16-24VAC Input
- Ten Programmable Auxiliary Modes
- Lifetime Warranty





#### **8000SF Series Standard Slope Front Consoles**

Series 8000SF Consoles are designed to control and monitor most any type electric lock and may be ordered with up to 12 stations. An external source of power similar to DynaLock power supplies shown on pages 25 thru 27 is required. Slope front consoles larger than 12 stations or that may have an internal power source are considered custom. Refer to the custom console section pages 43 and 44.

8000SF Consoles are furnished in a black front metal panel with blue metal sides. Available in 4 different size enclosures from 1 to 12 stations. Included features on each station:

One red LED indicator.

One green LED indicator.


One SPDT toggle switch (Specify momentary or maintained contact). All consoles require external power. Specify operating voltage 12 or 24 VDC when ordering.

MODEL	PRODUCT	LIST PRICE
8001SF	1 Station Slope Front Console	380.00
8002SF	2 Station Slope Front Console	506.00
8003SF	3 Station Slope Front Console	633.00
8004SF	4 Station Slope Front Console	844.00
8005SF	5 Station Slope Front Console	950.00
8006SF	6 Station Slope Front Console	1140.00
8007SF	7 Station Slope Front Console	1330.00
8008SF	8 Station Slope Front Console	1468.00
8009SF	9 Station Slope Front Console	1652.00
8010SF	10 Station Slope Front Console	1835.00
8011SF	11 Station Slope Front Console	1856.00
8012SF	12 Station Slope Front Console	2025.00

ACCESSORIES	LIST PRICE

LK

Label Kit - Includes engraved nameplates to number stations 1 thru 12 and 5 nameplates to label functions "SECURE", "UNSECURE", "CLOSED", "OPEN" and "RELEASE" as required. 53.00



MODEL "SF"	Α	В	С
8001-8003	6.5"	8.3"	3.0"
8004-8005	10.0"	8.3″	3.0"
8006-8007 8008	14.0"	8.3"	3.0"
8009-8010 8011-8012	17.0"	8.3″	3.0"

Fax: 1.860.585.0338

# **Custom Consoles**





Module

**8000 Series Custom Consoles** 

Consoles are specially fabricated to customer requirements. The factory must be consulted for specific pricing, delivery and performance specifications. Consoles, regardless of configuration, share common monitoring and control functions. DynaLock has developed a universal control module to perform these functions. It satisfies the majority of applications, keeps initial cost to a minimum and facilitates service.

Please refer to page 44 - "8000 Series Quotation Questionnaire" before contacting Sales for a price quotation.



#### **8000CSF Series**

CSF - Custom Slope Front Consoles are capable of performing additional control and monitoring functions, with increased station capacity beyond the standard 8000SF Series on page 42.



8000DT Series

DT - Desk Top Consoles are furnished in black cabinets with a brushed aluminum finish front panel. Cabinet size and shape are configured to reflect console function.



8000RM and 8000WM Series

RM - Rack Mount and WM - Wall Mount Consoles are furnished on a brushed aluminum finish panel, with or without back box.

# **Custom Consoles**




#### 8000 Series Quotation Questionnaire

Please complete the following questionnaire and fax it to 860-585-0338 for a prompt price and delivery quotation. Refer to 8000 Series Brochure for complete explanation of console terminology, found at www.dynalock.com.

Style of Console:   CSF	Type of electric lock(s)	Type of electric lock(s) to be controlled:	
☐ RM	☐ Electromagnetic	☐ With delay egress	
□DT	☐ Electric Deadbolt	☐ Fail-Safe ☐ Fail-Secure	
□wm	☐ Electric Strike	☐ Fail-Safe ☐ Fail-Secure	
Input Voltage: ☐ 12V ☐ 24V			
Number of Stations:			
Locks to be controlled have the following op	otions: Door Status 🔲	Lock Status	
Console to: ☐ Control/Monitor ☐ Con	trol Only Monitor	Only	
Individual Station Type:   T  TL1	☐ TL2 ☐ TL3	□L1 □L2 □L3	
Type of Control Switch:   Maintained Con	ntact	Contact	
Light color preferences from top to bottom:	(Red, Green, Yellow). (T)	(M) (B)	
Master Alarm Station with Audible (MA):	☐ Yes ☐ No		
If Yes Audible Signals: ☐ Door Status (oper	n) 🔲 Lock Status (unlock	ked) Delay Egress (3101B lock)	
☐ Standard: Audible is correc		occurs and continue until condition	
☐ Other - Explain: _			
Master Alarm Station includes mute switch to new alarm condition) and red power "ON" L	•	vill silence but will be overridden with	
Master Override: ☐ MOT ☐ MOK	☐ MOC		
Master Lockout: MLT MLK	☐ MLC		
System Description of Operation (please tyr	ne lusing a senarate nage if	necessary):	

# Communicating **Bathroom System**



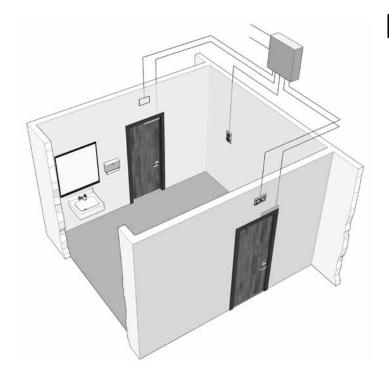

#### 8500 Series Communicating Bathroom Systems

Series 8500 Bathroom Systems provide privacy for the occupant of a single bathroom shared by adjacent rooms. The occupant can lock/unlock all doors using an interior pushbutton. Exterior pushbuttons are located above or adjacent to each door, to provide release of all doors during an emergency. Facilities for fire panel emergency release are also provided. The complete system includes control switches, magnetic locks, power supply, and wiring diagram.

MODEL		PRODUCT	LIST PRICE
8500-2	Two Door System - Inc	cludes:	1800.00
	(2) 2511-DSM (1) 6110-CB-ILM-24V	Maglock with door status switch Red pushbutton, SPDT, maintained silk screened "LOCKED WHEN LIT, PRESS TO OPERATE"	
	(2) 6110-EO-ILM-24V		· II
	(1) 5500-FAC-ILB-24V (1) 900274	Power supply, 24VDC, 2A System wiring diagram	
8500-3	Three Door System - I	ncludes:	2286.00
	(3) 2511-DSM (1) 6110-CB-ILM-24V	Maglock with door status switch Red pushbutton, SPDT, maintained silk screened "LOCKED WHEN LIT, PRESS TO OPERATE"	
	(3) 6110-EO-ILM-24V	Red pushbutton, SPDT, maintained silk screened "EMERGENCY UNLOCK, OCCUPIED WHEN LIT	·11
	(1) 5500-FAC-ILB-24V (1) 900419	•	

# Miscellaneous Accessories







MODEL	PRODUCT	LIST PRICE
9200	Surface mounted magnetic contact SPDT rated 0.3 Amps @ 30VDC.	38.00
9250	Mortise mounted magnetic contact SPDT rated 0.3 Amps @ 30VDC.	58.00
9275	Mortise mounted roller ball type SPDT rated 4 Amps @ 24VDC.	66.00
9280	Mortise mounted roller ball type DPDT rated 4 Amps @ 24VDC.	87.00









#### **9300 Series Armored Door Cords**

MODEL	PRODUCT	LIST PRICE
9300	Flexible armored door cord 18" long, less wires.	40.00
9350	Flexible armored door cord 18" long with three 24"L wires.	53.00

# Special Finishes




DART NUMBER	ALUMIN .	US28 UM BRIGHT BRASS	8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8	USA SI LIGHT BROWN	MEDIUM BROWIN	PARK BARK BONS	8 8 1 8 1 8 1 8 1 8 1 8 1 8 1 8 1 8 1 8	* 67.0
PART NUMBER	/ 3	3/46.	3/ 167.	3/ 8.	3/28	3/ 5	8/ 18	š/
SINGLE MAG. LOCKS	STD	200.00	68.00	68.00	68.00	68.00		156.00
SINGLE MAG. LOCKS - TJ	STD	253.00	111.00	111.00	111.00	111.00	111.00	200.00
DOUBLE MAG. LOCKS	STD	276.00	111.00	111.00	111.00	111.00	111.00	266.00
DOUBLE MAG. LOCKS -TJ	STD	388.00	200.00	200.00	200.00	200.00	200.00	354.00
TJ20 AND TJ30 KIT, 4850 SERIES SPECIALITY BRACKETS	STD	55.00	44.00	44.00	44.00	44.00	44.00	55.00
3500 AND 3600 SERIES CUSTOM LENGTH HOUSING TO 36"	STD	332.00	155.00	155.00	155.00	155.00	155.00	310.00
3700 AND 3800 SERIES CUSTOM LENGTH TO 72"	STD	NA	NA	NA	NA	NA	NA	NA
3700 AND 3800 SERIES CUSTOM LENGTH HOUSING TO 96"	STD	NA	NA	NA	NA	NA	NA	NA
4000 SERIES TO 14"	STD	111.00	68.00	68.00	68.00	68.00	68.00	111.00
4000 SERIES TO 36"	STD	222.00	111.00	111.00	111.00	111.00	111.00	222.00
4000 SERIES TO 72"	STD	NA	NA	NA	NA	NA	NA	NA
4000 SERIES TO 96"	STD	NA	NA	NA	NA	NA	NA	NA
* 6000 AND 7000 CONTROLS AND KEYSWITCH	NA	44.00	44.00	NA	NA	44.00	NA	44.00
6451 EXIT SENSOR BAR	STD	NA	40.00	NA	NA	40.00	NA	NA
7200 KEYPAD	STD	100.00	68.00	68.00	68.00	68.00	68.00	100.00

CONSULT FACTORY FOR AVAILABILITY, COST, DELIVERY AND MINIMUM ORDER BILLING THAT MAY APPLY.
NA - FINISH NOT AVAILABLE. FOR BEST COLOR MATCH SUBMIT SAMPLE.

<sup>\*</sup> Excludes 6500, 6700 & 6800 Series. See pages 33-35 for pricing on these products.



#### **Door Handing**

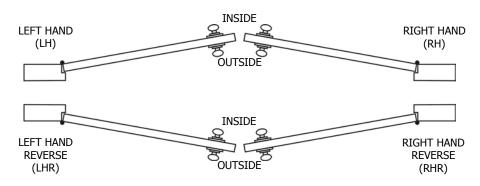

DOOR HAND DETERMINED FROM OUTSIDE

#### **Architectural Finish Reference**

FINISH DESCRIPTION	U.S. STANDARD REFERENCE NO.	BHMA REFERENCE NO.			
Satin Alum	US28	628			
Bright Brass	US3	605			
Satin Brass	US4	606			
Light Bronze	US10	612			
Medium Bronze	US13	617			
Dark Bronze	US10B	613			
Black Satin	US19	631			
Bright Chrome	US26	625			
Satin Stainless Steel	US32D	630			

#### **Switch Contact Forms**

_~	·	-0	<u> </u>
FORM A	SPST-NO	FORM X	SPST-NO-DB
_0	_	-01	<u> </u>
FORM B	SPST-NC	FORM Y	SPST-NC-DB
_0	<u></u>	— <u>o</u> l	0
FORM C	SPDT	FORM Z	SPOT-DB
-0		_	<u> </u>
<u> </u>			<u> </u>
FORM YY	DPST-NC-DB	FORM XX	DPST-NO-DB
-01			<u> </u>
FORM CC	O DPDT	O FORM ZZ	O DPOT-DB

Fax: 1.860.585.0338



Need to know what distributor is in your area?
In need of a maglock spec sheet to finish a quote?
This downloadable content and more is at your fingertips!!
Please visit us on the web at:

www.dynalock.com

- Product Manuals & Templates
- Sales & Technical Literature
- Current List Price Guide
- New Product Announcements
- Trade Show Schedule
- Cross Reference Guide



# 2011 CONDENSED CATALOG LIST PRICE GUIDE ISSUE 11A



### **Lifetime Product Warranty**

All DynaLock standard products are covered by our lifetime warranty. Any factory defective product will be repaired or replaced at no charge.

# **Emergency Technical Support**

Routine technical support is available Monday - Friday, 8:00 AM - 5:00 PM (EST) by calling the factory toll-free at **1-877-DYNALOCK** 

Emergency technical support is available Monday - Friday, 5:00 PM - 8:00 PM (EST) by calling either (860) 637-2599 or (860) 637-2394

For Additional Information Contact:





Proudly Made In The USA

#### **DynaLock Corporation**

705 Emmett Street
P.O. Box 2728
Bristol, CT 06011-2728
Ph/ 877-DYNALOCK Toll Free
860-582-4761
Fx/ 860-585-0338
E-mail/ info@dynalock.com
Web/ www.dynalock.com