
E1500-7

EXIT DEVICE TEMPLATE FOR HOLLOW METAL DOORS

AND YALE TRIM CONTROLS FOR USE WITH MODEL 1560 AND 1570 CORBIN

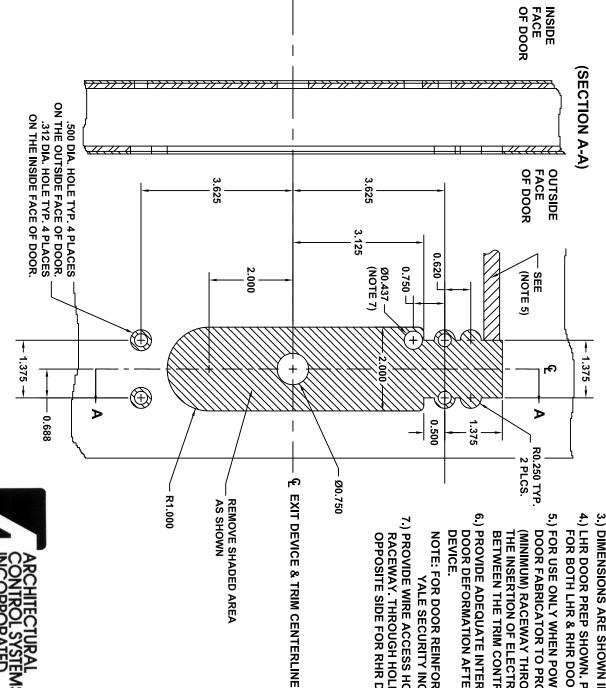

NOTES

- 1.) TEMPLATE FOR USE WITH ELECTRIFIED TRIM MODELS 1560 & 1570. USE MANUFACTURER'S DEVICE TEMPLATE FOR ADDITIONAL INFORMATION.
- 2.) DO NOT SCALE DRAWING
- 3.) DIMENSIONS ARE SHOWN IN INCHES.
- 4.) LHR DOOR PREP SHOWN. PREPARATION IS TYPICAL FOR BOTH LHR & RHR DOOR HANDINGS.
- 5.) FOR USE ONLY WHEN POWER TRANSFER IS NOT RUN THROUGH DEVICE. BETWEEN THE TRIM CONTROL AND ELECTRIC HINGE. **DOOR FABRICATOR TO PROVIDE A 3/8" DIAMETER** THE INSERTION OF ELECTRICAL WIRES RUNNING (MINIMUM) RACEWAY THROUGH THE DOOR TO ALLOW
- 6.) PROVIDE ADEQUATE INTERNAL SUPPORT TO PREVENT DOOR DEFORMATION AFTER TRIM IS BOLTED TO THE

NOTE: FOR DOOR REINFORCEMENT INFORMATION USE YALE SECURITY INC. TEMPLATE 7400-0000.

7.) PROVIDE WIRE ACCESS HOLE WHEN USING EXIT DEVICE AS WIRE **OPPOSITE SIDE FOR RHR DEVICES.** RACEWAY. THROUGH HOLE FOR LHR DEVICE SHOWN. LOCATE HOLE ON