

EGS-WUPP

Entraguard™ Silver Walk-Up Package Telephone Entry System

DATA SHEET

Standard Features for Telephone Entry

- Stand alone functionality or seamless integration with Keri's access control system and Doors.Net software for real access control and telephone entry integration
- PXL-500GP installed and wired inside the housing with 65,000 cardholder capacity, 750 tenant capacity on all units
- Four line, large font per line, soft white supertwist LCD display, Lexan™ cover
- Three 80 character, programmable, scrolling pages for instructions and messages with automatic timed rotation
- Up to 6-digit directory code, up to 5-digit Entraguard ID codes (PINs), up to 15-digit telephone numbers
- Networkable to manage multiple doors via RS-485
- Time Zone restrictions for calling tenants and for PINs
- Links a visitor to the resident who allowed entry
- Programmable talk time, tone dialing, adjustable volume
- Telephone entry units can be mixed with access control units on a single network for up to 128 controllers
- Flexible connectivity: RS-232, Modem, TCP/IP
- Stores up to 3,640 events, manages up to 255 individual sites
- Weather and vandal resistant housing
- Quick disconnect terminals, two Mylar™ speakers with superior sound
- Door forced open and door held open alarms, heavy duty door and alarm relays
- Built-in surge protection, non volatile memory
- Powerful Doors.Net Access Control Software with full access control features: time zones, temporary users, online programming, operator security levels, multiple site management and automatic configuration



Keri's **Silver Walk-Up Package** addresses the basic telephone entry application, namely visitor and resident control for the main entrance to a building. The connections are already made inside the box. The installer needs only to mount the unit, connect a phone line, the power supply, the connection to the door strike, and then decide how unit programming will be done. Once connected to the PC (either directly, via modem, or via TCP/IP) simply run Auto-Configuration. A PXL-500GP comes already installed and wired inside the housing. Cards are enrolled bulk or one-at-a-time by presenting them to the reader. A second door may be controlled simply by plugging an SB-593 to the PXL-500GP and connecting a second reader. A Wiegand version is also available (EGS-WUPW with a P-300 proximity reader).

The Entraguard Silver is the mid size offering in Keri's telephone entry product line. With a large-font, 4-line, scrolling display, the Silver has a 750 tenant capacity, enough to handle most projects. Designed for looks and durability, it comes in an attractive, weather resistant, 14-gauge, brushed stainless steel enclosure. The Silver is available at a price well below competitive medium-capacity systems. A No-Phone-Line option is available. Each Entraguard Silver has two extra relay outputs that can be used in a variety of ways including turning on a lobby light, unlocking more than one interior entrance, etc. This can be initiated by tone commands from the tenant's location or be based on an access granted decision. An on-board modem is also included for remote programming.



2305 Bering Drive • San Jose, California 95131
408-435-8400 • Toll Free: 800-260-5265 • Fax: 408-577-1792


email: sales@kerisys.com • web: www.kerisys.com

EGS-WUPP Entraguard™ Silver Walk-Up Telephone Entry System

DATA SHEET, Page 2 of 2

Access Control Features

- Real, integrated access control with PXL-500 or NXT controllers - the Silver becomes part of a Keri access control network
- Simple, one button auto-configuration
- 32 time zones, 3 holiday schedules
- Unlimited access control groups
- Expandable to 255 doors, 65,000 cardholders
- Automatically expiring Entraguard IDs (PINs) and cards, as well as doors and gates
- Time Zones on Entraguard IDs (PINs) and cards,
- Full reporting of events
- Optional TCP/IP connectivity
- Direct door operation from PC
- Automatic lock and unlock of doors and gates
- Assignable inputs and outputs
- Rollcall/track, muster
- Image capture and optional badge printing
- Remote online management of multiple sites
- System operator security levels with configurable privileges

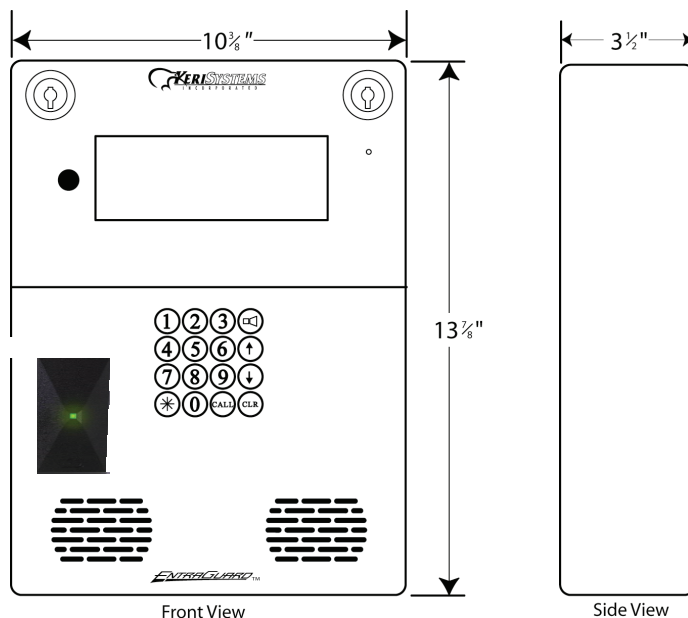

*Also available as an EGS-WUPW
with a P-300 proximity reader*

Special Telephone Entry Features

- Do not Disturb Call Feature - programmable for individual tenants
- Do not Display Name Feature - programmable on a per tenant basis
- Remote online management of multiple sites
- Ability to link visitors to the residents who allowed them entry

*When using Entraguard products in a dial-up application,
Keri requires the use of an approved modem.
Please refer to the Recommended Peripherals list on the
web site or contact Keri customer service.*

General Features:

- Surface or recess mount
- Weather and vandal resistant housing
- Non-volatile memory
- Built-in surge protection plus surge protection kit
- Programmable talk time
- Tone dialing
- Heavy-duty alarm and output relays
- Adjustable volume control
- Maintenance free LED lighting
- Two Mylar™ speakers with superior sound
- Quick disconnect terminals

Specifications*:

- Capacity: Up to 750 Tenants
- Outputs: Door Relay, Alarm Relay, 2 additional programmable relays
- Operating Temperature: +5° to 140° F (-15° to 60° C) with heater: -20° to 140° F (-29° to 60° C)
- Input Power: 12 VDC @ 1 A
- Current Draw: 750 mA (**Silver** unit) Up to 250 mA for **PXL** controller
- Relay Contact Rating: 1 A @ 24 VDC
- Size: 13.88" H x 10.34" W x 3.5" D (35.3 cm x 26.3 cm x 8.9 cm)
- Weight: 12.30 lbs (6.09 kg)
- Material: 14 gauge stainless steel
- Warranty: 2 years
- Finish: Brushed Stainless Steel

Options / Accessories:

- Camera
- Handset
- Hooded Enclosure / Pedestal Mount
- Recessed Wall Mount Kit
- Heater (for operation below 5° F/-15° C)
- No Phone Line System

** Specifications subject to change without notice.*

*All trademarks are the property of
their respective owners.*



Presented By: