

ES411

Door Prop Alarm

The ES411 Door Prop Alarm provides a unique solution to the common security problem of doors being propped or held open. Used as a stand-alone product or tied to any access control system, these devices encourage users to keep secured doors closed while reducing the number of false alarms for the security staff.



FEATURES & BENEFITS

- Aesthetically pleasing design
- Compatible with all access control systems
- Can be used as a stand-alone product
- Field selectable alarm delay
- 12-24 VDC/VAC operation
- Easy installation
- Encourages employees to maintain access control procedures
- Available with or without reset/bypass keyswitch
- 80dB alarm sounder
- Compact design; fits in a one or a two gang enclosure




ES411-K1

ES411 Series


DSI[®]
DESIGNED SECURITY, INC.
A Detex Company

1402 Hawthorne St.
Bastrop, TX 78602
Toll Free: 1-800-272-3555
Phone: 1-512-321-4426
Fax: 1-512-321-9181
E-mail: dsi@dsigo.com
www.dsigo.com


ES411 Door Prop Alarm - Typical Applications

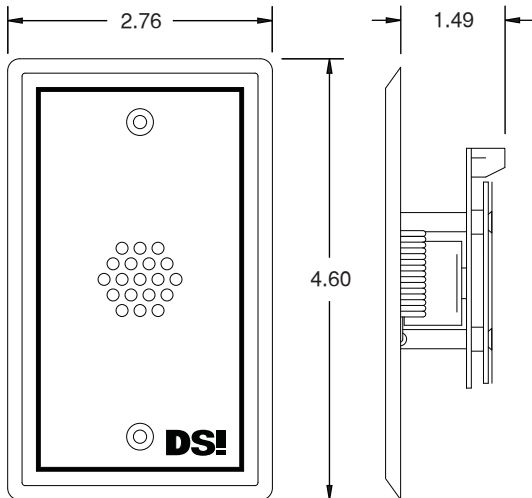

ES411-K0

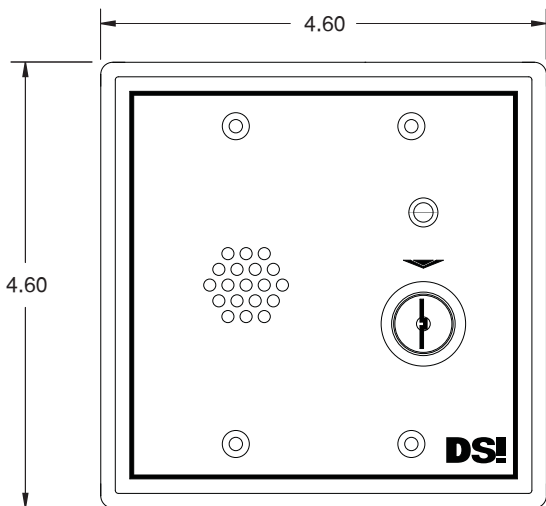

ES411-K1

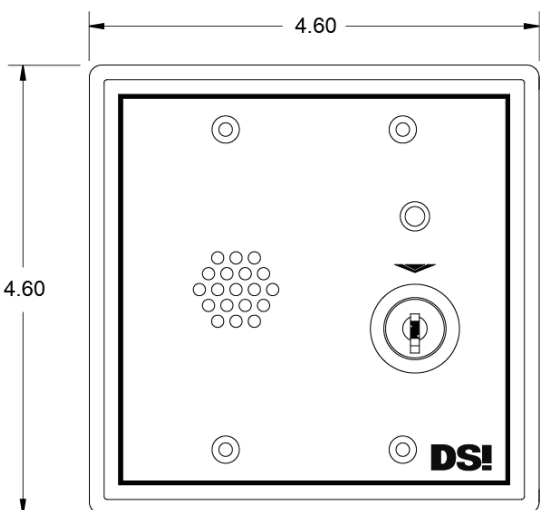

ES411-K6

PRODUCT DESCRIPTION

The ES411 Series Door Prop Alarm provides a unique solution for the common security problem of propped doors. These units are typically mounted near the monitored door. When the door has been held open longer than the preset time interval (adjustable from 0-60 seconds), the local audible alarm sounds to advise that the door should be closed. When the door is closed, the alarm is silenced and the timing circuit is automatically reset.

This unit also has an alarm status relay to enable remote monitoring of door alarms. The relay and audible alarm are activated after timed delay expires.

ELECTRICAL SPECIFICATIONS

Power:	12-24 VAC/VDC @ 100 mA
Local Control:	Key switch for Reset/Bypass
Control Input:	N/C dry contact
Output Contact:	N/C, 500 mA @ 30 VDC
Delay Time:	Adjustable 0-60 seconds
Sound Level:	80dB @ 3 ft

MECHANICAL SPECIFICATIONS

Mounting:	ES411-K0	1 gang electrical box
	With key switch	2 gang electrical box
Dimensions:	ES411-K0	2.76"w x 4.60"h x 1.49"d
	ES411-K1	4.60"w x 4.60"h x 1.49"d
	ES411-K6	4.60"w x 4.60"h x 1.49"d
Key Switch Options:	K0	no key
	K1	double bit
	K6	DPDT
Finish:	Painted - DSI beige	



DSI[®]
DESIGNED SECURITY, INC.
A Detex Company

1402 Hawthorne St.
Bastrop, TX 78602
Toll Free: 1-800-272-3555
Phone: 1-512-321-4426
Fax: 1-512-321-9181
E-mail: dsi@dsigo.com
www.dsigo.com