

OUTDOOR EMERGENCY PHONES

0

0

EMERGENCY

1111111111111111

1111111111111111

111

CALL

0

ETP-400K – Keypad Emergency Phone

Description

The **ETP-400K** is an outdoor-rated, ADA-compliant hands-free Emergency Phone with Keypad for use in locations such as: medical centers, college campuses, access controlled areas, and industrial parks.

Features

- Typically used on a PBX line, keypad can be used to make calls to numbers authorized by you
- Cast metal raised letter and Braille signage for ADA compliance
- · Vandal resistant stainless steel faceplate and metal button
- · Phone line powered: no power supply or battery back-up needed
- Circuit boards are conformally coated for water protection
- · LED indicator for hearing impaired
- Auxiliary input and outputs to integrate with CCTV, Blue Light Strobe, Scream Alert™ and other devices
- Built-in auto-dialer can dial two numbers: if first number doesn't answer or is busy, dials second number.
- · Auto-answer allows security to monitor and initiate calls with Emergency Phone
- Options available that offer the ability to automatically identify attendant of location of calling phone by recorded message and digital display

Specifications

Construction: 12 gauge (2.8mm) #4 brushed stainless steel face plate Dimensions: 9.5(241) W x 11.75 (298)H in(mm)

Wall Opening: 6.63(168) W x 9.75(248) H x 2.5(64) D in(mm)

Weight: 8 lbs. (3.6kg)

Operating Temperature: -4°F to +149°F (-20°C to +65°C)

Mounting: Flush mounts (surface mount options available)

Communication: 2-way hands-free communication

Digit Capacity: Up to 18 digits, including pauses, for each of two phone numbers (top button)

Dialing Speed: Approximately 10 tones per second

Power Source: Phone line powered (requires 20mA at 24 v off-hook)

Connection: Parallel tip and ring connected to RJ11 connector for quick installation

Circuit Protection: Varistor lightening suppressed and full wave polarity guarded

Programming: Non-volatile EEPROM programming can be done from any telephone.

"On Time": Programmable from 1-4270 minutes in 1 minute increments.

Wiring Requirements: 1 twisted-shielded pair

Compliance: CSA Certified to UL Standard 60950

Options & Accessories

Voice Location Identifier: Model ETP-400KV includes the capability to record a message identifying the location

of the call (top button only).

Faceplate Camera: Add "OP3" to model number to add a color pinhole camera mounted discreetly behind

the faceplate. Add "OP3BW" for a b/w camera.

"TO CALL" Casting: On Model **ETP-400KC** the top button reads TO CALL instead of **EMERGENCY**

8-Line Consolidator: Model **EC-8** allows connection of up to 8 phones on one phone line while retaining ability to call each phone individually. Can also create a closed system without need

for any phone lines.

Monitoring/Diagnostic


Talk-A-Lert®, model ETP-TAL, automatically polls each Emergency Phone, reports

Software Package: incoming calls and keeps permanent records of all events

Copyright 2009 Talk-A-Phone Co. All rights reserved.

ETP-400K - Keypad Outdoor Emergency Phone

Dimensions

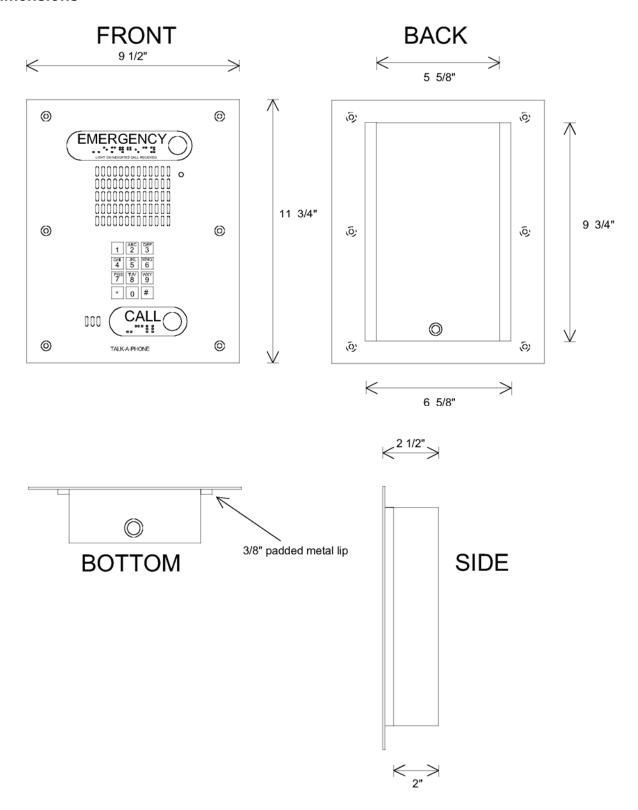

Copyright 2009 Talk-A-Phone Co. All rights reserved.