



PRODUCT FEATURES


- Key switch for manual reset capability where required by code
- Enables manual cut-off of power for testing and other emergency situations
- Simple bi-color, LED status indicator for easy-to-read power status
- Easy-to-mount metal enclosure equipped with security cam lock
- CFAR version available to meet Canadian fire release requirements
- Select 12 VDC unit or 24 VDC unit to match power supply output voltage
- 5A-rated SPDT plunger switches
- MagnaCare® lifetime replacement, no fault warranty

SPECIFICATIONS

- Electrical:**
 Input Voltage: 12 VDC or 24 VDC (based on unit)
- Operating Temperature:**
 -4 to +122F [-20 to +50C]
 Indoor use only
- Dimensions:**
 5-1/4"L x 5-1/2"H x 2-1/2"D
- Shipping Weight:**
 3 lbs [1.36kg]



FAR shown with BPS and Fire Alarm

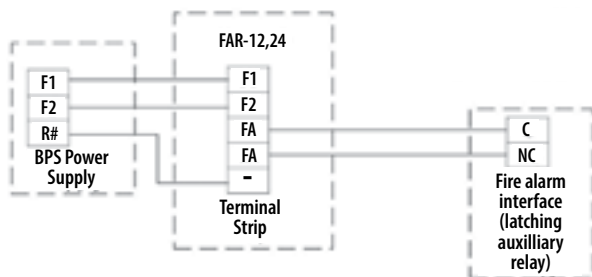

FAR

Fire Alarm Reset

Manual Door Lock Power Reset for Code Compliance

The FAR module provides functionality (beyond a standard fire trigger relay) when local code requires manual reset after a fire alarm. This self-contained unit interfaces to a fire alarm unit to cut power to devices downstream of the power supply in an alarm situation. The power stays off until the FAR's Key switch is manually reset. This feature is required by some jurisdictions to prevent the unintentional re-arming of doors until the fire alarm is reset and power is restored to the access control system during an ongoing emergency.

MODELS

PART #	Description
FAR-12	Fire Alert Reset Control - 12 VDC
FAR-24	Fire Alert Reset Control - 24 VDC

