

## HRG Performance Series DVR

[www.honeywellvideo.com](http://www.honeywellvideo.com)

### 480 IPS (NTSC) 4, 8, 16 CHANNEL EMBEDDED DIGITAL VIDEO RECORDER

The HRG series digital video recorder (DVR) offers clear crisp video using H.264 video compression and supports a high-end feature set that exceeds the needs of many surveillance applications at a very economical price!

Recording at a rate of up to 480 (16ch), 240 (8ch), or 120 (4ch) images per second 4CIF real-time NTSC video, the HRG DVR supports a wide variety of capabilities such as smartphone remote access (apps for Apple® iPhone® and Android™), mouse control, IR remote control, and multiple search engines to quickly find the evidence video. In addition to remote access from iPhone and Android devices, HRG can be remotely accessed via a Web browser or by using multi-site remote access software.

Two USB ports enable intuitive mouse control and simultaneous DVR operations such as backing up video evidence files onto USB media. A viewer is included with each clip, making it easy for investigators to view video evidence. HRG supports continuous and event recording and is configurable per channel. HRG can also be configured to record upon detection of motion within a user-specified area. Recording upon detection of motion can be used to maximize storage efficiency.

#### Market Opportunities

Supporting an advanced feature set and low pricing, HRG is an ideal DVR for a wide variety of surveillance applications including small to medium-sized retail outlets, apartment buildings, warehouses, and educational facilities. HRG is well suited to support applications that rely on capturing maximum detail of activity through building entrances and exits, and clear video playback.

Remote access from mobile and fixed locations opens up many new application possibilities for HRG. Business owners on the move in this highly mobile society can check in on their businesses from virtually any location with Internet access.

#### Features

- H.264 video compression
- 4CIF resolution @ real-time record rates
- 4, 8, or 16 video inputs
- 4 audio inputs, 1 audio output
- Remote access from iPhone and Android devices
- Remote access via Internet Explorer web browser and multi-site software.
- Continuous recording during playback and during transmission to remote site
- Infrared Remote Control included
- Mouse included for DVR control via front panel
- 2 (front & rear panel) USB 2.0 ports
- PTZ dome control for a wide variety of protocols
- Self-diagnostics including hard disk drive S.M.A.R.T. monitoring




# HRG Performance Series DVR


www.honeywellvideo.com

## DRAWINGS


System Diagram

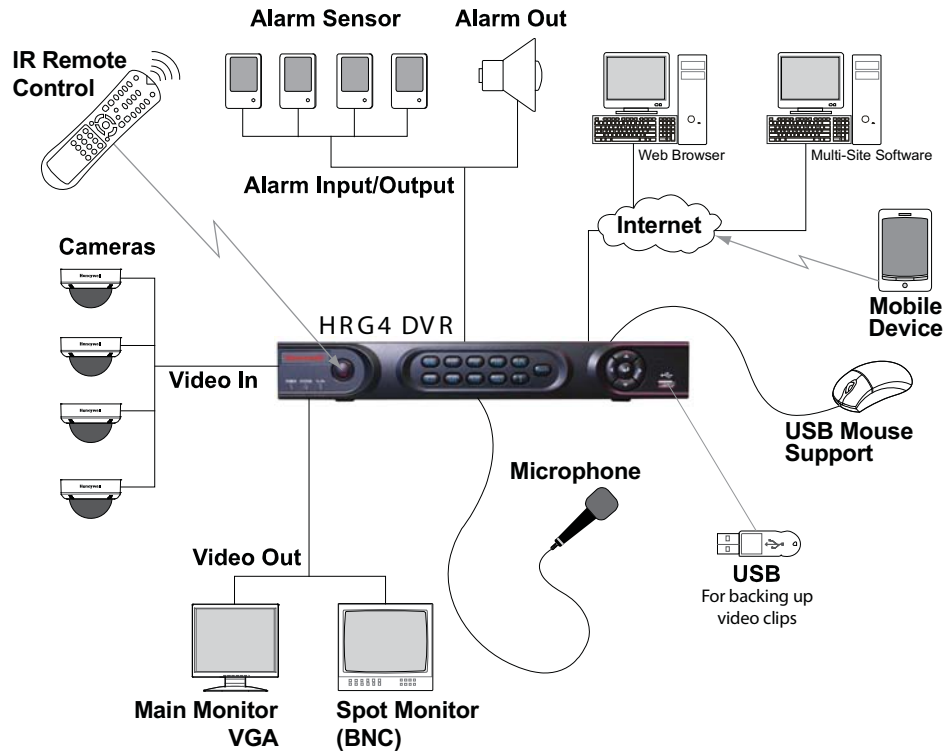


4-Channel DVR Rear View

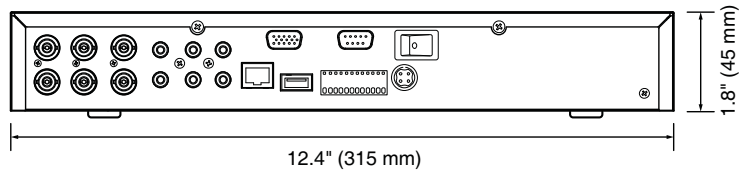


4-Channel DVR Side View

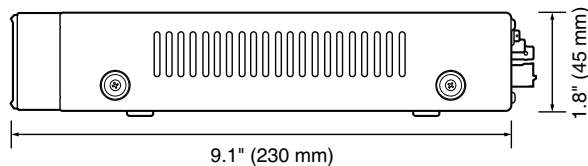

8/16-Channel DVR Rear View (16-channel DVR shown)

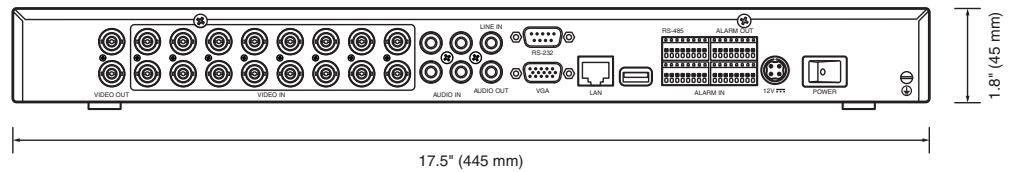

8/16-Channel DVR Side View

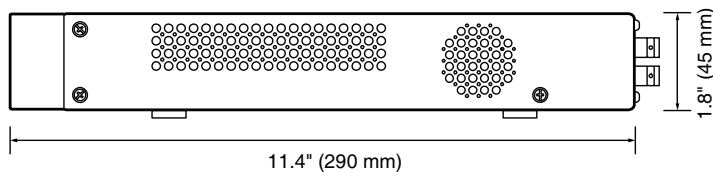

# HRG Performance Series DVR

www.honeywellvideo.com

## SPECIFICATIONS

Remote Access	
Sessions Maximum per HRG recorder	24 simultaneous connections: live view, search, playback
Administration: DVR configuration	One at a time
PTZ control	One at a time controlling PTZ
Compatibility	Windows XP, Windows 7 Mobile apps: Apple iPhone®, Android™
Recorder Unit	
Video Standard	NTSC or PAL software selectable
Color Control	Brightness, contrast, saturation, and hue
Recording and Transmission Compression Algorithm	H.264
Record Mode	(FIFO) Continuous buffer
Recording Capacity	Hard drive capacities up to 2 TB, see ordering section for details
Recording Rate @ 4CIF (Global)	Up to 480 ips (NTSC), model dependant
Video Resolution Settings	Main stream: 4CIF/2CIF/CIF Sub stream: CIF/QCIF
Video Motion Detection	Configurable zone detection area and sensitivity
Event Recording and Reporting	Input via alarm i/p contacts, and motion. Reporting via alarm o/p contact. Email notification
Removable Media	2 - USB ports
Still Image	JPEG file using Remote Access
Front Panel Control	Intuitive operation supports IR Remote Control and mouse
DHCP Enabled	DHCP or Static IP entry
Port number set-up	Individual entries for Server, HTTP, SMTP
PTZ Protocols Support	Supports multiple PTZ protocols
Language Support	English
Connections	
Video Input	4/8/16, BNC 1 Vp-p @ 75 ohms
Video Output	1 – Composite main monitor, BNC 1 Vp-p @ 75 ohms 1 – VGA Main Monitor 1 – Spot BNC 1 Vp-p @ 75 ohms
Audio Input/Output	Input: 4 channel, line level Output: 1 channel, line level
Sensor Inputs General Purpose	4 inputs (4ch) – terminal block 8 inputs (8ch) – terminal block 16 inputs (16ch) – terminal block
Control Outputs	1 – relay out (4ch); NC/NO terminal block 4 – relay out (8 & 16ch); NC/NO terminal block
Serial Ports	2 – USB (2.0) ports: one via front panel and another via rear panel 1 – RS485 terminal block 1 – RS232
Primary Storage	SATA HDD
Networking	RJ45 10M/100M self-adaptive Ethernet interface

Electrical	
Input Voltage	12 VDC power adapter
Power Consumption	HRG4 and HRG8 25 W (max) HRG16 30 W (max)
Mechanical	
Dimensions (W x D x H)	4ch unit: 12.4 × 9.1 × 1.8 in. (315 × 230 × 45 mm) 8/16ch unit: 17.5 × 11.4 × 1.8 in. (445 × 290 × 45 mm)
Weight	HRG4 5.7 lbs (2.6 kg) HRG8 and HRG16 10.1 lbs (4.6 kg)
Construction	Housing: Steel chassis
Environmental	
Temperature	Operating: 32°F to 104°F (-10°C to 55°C) Storage: -22°F to 176°F (-30°C to 80°C)
Relative Humidity	10% to 90%, non-condensing
Regulatory	
Emissions	FCC Part 15B, Class A
Immunity	EN50130-4:1995+A1:1998+A2:2003
Safety	CSA/UL 60950-1, 2nd Edition

**NOTE:** Honeywell reserves the right, without notification, to make changes in product design or specifications.

# HRG Performance Series DVR

www.honeywellvideo.com

## ORDERING

<b>Recommended Accessories</b>	
<b>HRG DVR</b>	
HRGRC	Spare IR Remote Control
HRG4PS	Spare adapter power supply 4-channel DVR
HRG8PS	Spare adapter power supply 8-channel DVR
HRG16PS	Spare adapter power supply 16-channel DVR
<b>Monitors</b>	
HMLCD19L	19" L-Series Color LCD Monitor (VGA)
HMLCD17L	17" L-Series Color LCD Monitor (VGA)
<b>Cameras</b>	
HB75	IR bullet, super high resolution, True Day/Night
HD73P	Minidome, super high resolution, True Day/Night
HD70P	Minidome, super high resolution, day/night, IR LEDs
ACUIX™	High-performance PTZ camera
<b>Surge Protection</b>	
HCSP1	Camera surge protector
HDSP1	PTZ dome surge protector

<b>Ordering</b>	
HRG45	4-Channel DVR, 500 GB HD
HRG41	4-Channel DVR, 1 TB HD
HRG85	8-Channel DVR, 500 GB HD
HRG81	8-Channel DVR, 1 TB HD
HRG161	16-Channel DVR, 1 TB HD
HRG162	16-Channel DVR, 2 TB HD

*Apple and iPhone are trademarks of Apple Inc.*

### For more information:

[www.honeywell.com/security](http://www.honeywell.com/security)

### Automation and Control Solutions

Honeywell Security Products Americas  
2700 Blankenbaker Pkwy, Suite 150  
Louisville, KY 40299  
1.800.323.4576  
[www.honeywell.com](http://www.honeywell.com)

L/PHRGSDVRD/D  
January 2013  
© 2013 Honeywell International Inc.

# Honeywell