



Aurora

PIR Motion Sensor

Don't be fooled by its small size! Next-generation Split-Zone Optics and advanced ASIC-based processing give the pet immune Aurora laser-sharp detection.

FEATURES

- Immune to pets up to 40 lbs.
- Advanced ASIC-based processing
- Split-Zone Optics technology
- Ultra-low current
- Totally silent relay operation

SPECIFICATIONS

Detection Method

- Dual Element Passive Infrared

Coverage

- Pet Immune Lens: 35' x 45' (10.6m x 13.7m)
- Long Range Lens: 75' x 10' (23m x 3m) (Optional part number Aurora-LR)

Detection Zones

- Pet Immune Lens: 28 zones (eight over eight long range, eight intermediate, four short range)
- Long Range Lens: six zones (one over one long range, two intermediate, two short range)

Pulse Processing

- Intermediate, Standard or Harsh, selectable via jumper link

Temp. Compensation

- Advanced dual-slope temperature compensation adjusts for ambient both above and below body temperature

Detectable Walk Rate

- 0.5-10ft/sec (.15-3m/sec)

Mounting Height

- 7ft. (2.1m) recommended for pet installations

Indicator

- Red LED, enabled/disabled via jumper link

Alarm Relay

- Form A, 28VDC, 90mA max. with 15-ohm protective resistor

Input Voltage

- 9-14 VDC (Aurora and Aurora-T) (Voltage reversal makes PIR inoperative)

Current

- 4 mA (standby, Aurora & Aurora-T only)
- 4 mA nom. (alarm, LED disabled)
- 10 mA nom. (alarm, LED enabled) (All current nominal at 12 VDC)

Operating Temp


- 14°F to 122°F (-10°C to +50°C)

Operating Humidity


- Up to 95% RH (max.), non-condensing

Dimensions

- 2.9"W x 4.1"H x 1.5"D (max protrusion) (60mm x 104mm x 38mm)

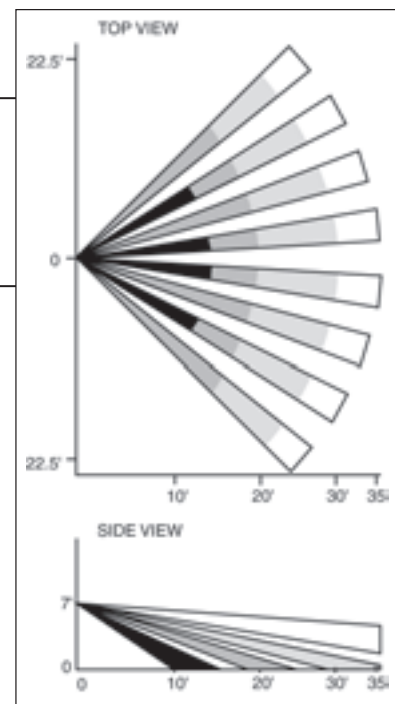

Pet Immune Lens coverage pattern

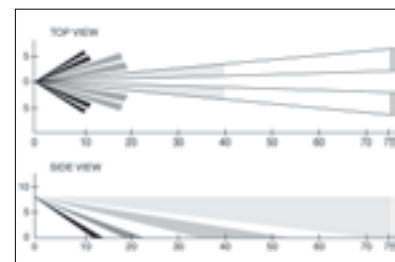

Long Range Lens coverage pattern

ORDERING

AURORA	PIR Motion Sensor
AURORA-T	Aurora with Tamper

Honeywell Security Group

ADEMCO
165 Eileen Way, Syosset, NY 11791
www.ademco.com

ADEMCO
A Honeywell Company