


50-Pair 66 Wiring Block W/O Bracket

PRODUCT SPECIFICATION

Package includes:

A. 50-Pair 66 Wiring Block, 1 pc



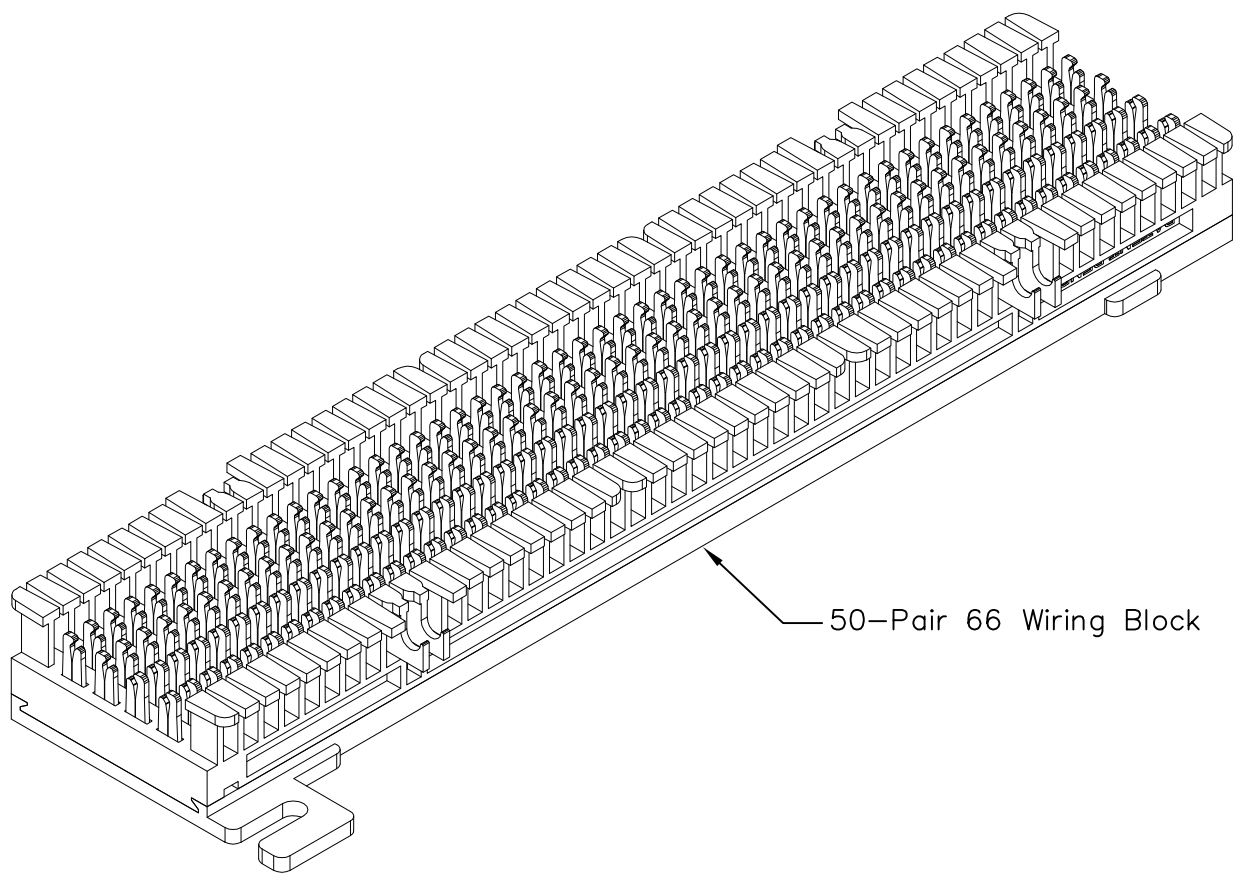


Features and Benefits:

- Designed for voice and data applications
- Performance exceeds Category 5e connecting hardware requirements specified in TIA/EIA-568-C.2
- Durable and strong high impact flame retardant material
- Mounts on wall or on ICMB89B0WH 89B mounting bracket
- Used with IC066BRCLP 66 wiring block bridging clips, IC066CV050 66 wiring block cover, and IC066LS050 66 wiring block labeling strips
- UL Listed

66 WIRING BLOCK W/O BRACKET, 50-PAIR				 <i>PremiumProducts</i> <i>ProvenPerformance</i> <i>CompetitivePrices</i>
ITEM NO.	IC066NB050	REV.	B	
DWG NO.	PS066NB050	PAGE NO.	1	

CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 14700 Alodra Blvd., La Mirada, CA 90638* www.icc.com

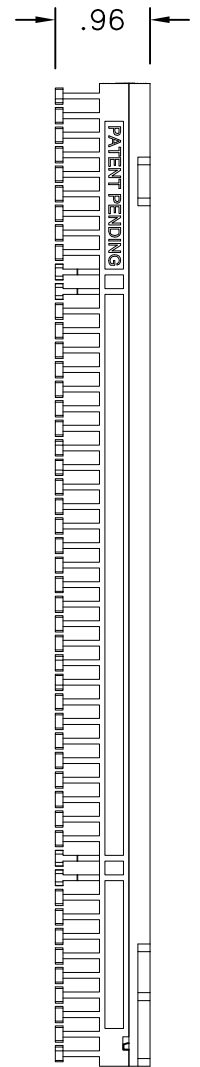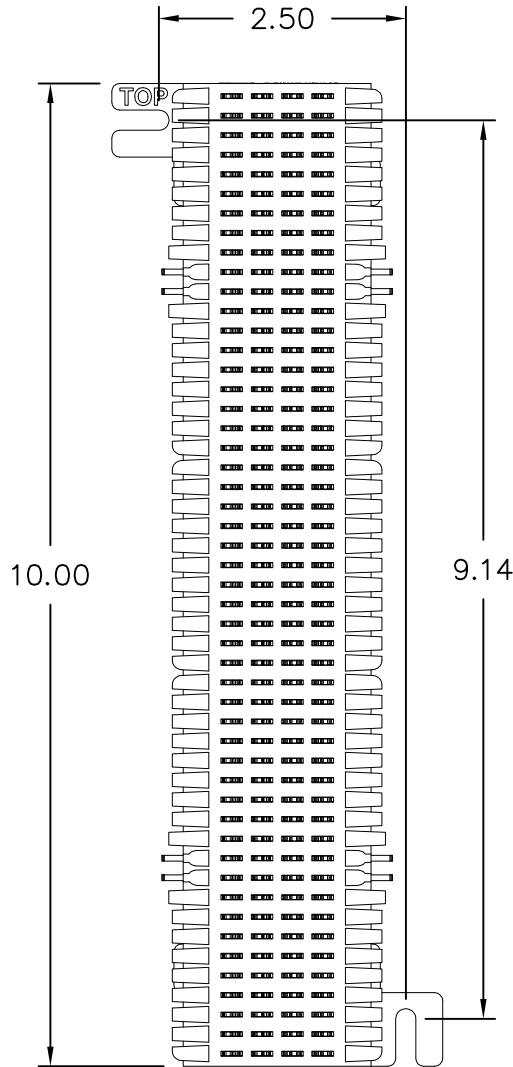

NOTE: UNLESS OTHERWISE SPECIFIED

1. ENVIRONMENTAL CONDITIONS:

- TEMPERATURE STORAGE
- STORAGE: -40 TO +70°C
- OPERATIONAL: -10 TO +60°C
- RELATIVE HUMIDITY (OPERATIONAL):
MAXIMUM NONCONDENSING 93%

2. ELECTRICAL:


- ELECTRICAL INSULATION RESISTANCE:
500 MOHMS MIN. @ 100V D.C.
- DIELECTRIC WITHSTANDING VOLTAGE:
1000V RMS @ 60Hz FOR 1 MINUTE
- CONTACT RESISTANCE: 2.5 mOHMS MAX.

3. MECHANICAL:

- TRANSVERSE EXTRACTION FORCE
MINIMUM 5N FOR 24 AWG
MINIMUM 3N FOR 26 AWG
- INSERTION/EXTRACTION LIFE: 200 CYCLES MINIMUM
- IDC WIRE GAUGE: 22~26 AWG

4. PHYSICAL:

- HOUSING: HIGH-IMPACT, FLAME RETARDANT PLASTIC, UL 94V0
- IDC: BRASS PLATED WITH 100 MICRO-INCH OF Sn.



66 WIRING BLOCK W/O BRACKET, 50-PAIR

ITEM NO. IC066NB050

REV. B

DWG NO. PS066NB050

PAGE NO. 2



CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 14700 Alodra Blvd., La Mirada, CA 90638* www.icc.com