

Nickel Plated F-Type Module, 25 PK

PRODUCT SPECIFICATION

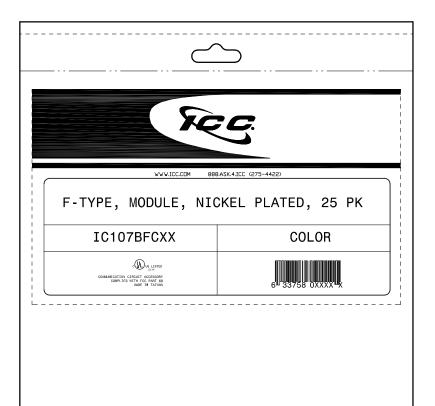

Package includes:

A. Nickel Plated F-Type Module, 25 pcs B. Packaging Bag, 1 pc




-Packaging Bag


Features and Benefits:


- Used for audio and video applications
- Rear threaded F-Type connectors for secure in-wall connections with both RG6 and RG59 coxial cables
- Provides a clean and neat appearance installation
- Compatible with all IC107 faceplates, inserts, surface mount boxes, and blank patch panels
- Compatible with all IC108 furniture faceplates, bezels, and surface mount boxes
- Used with ICC RG6 F-Type ICPCSF patch cords
- Available in white
- 25 modules included in packaging bag
- UL listed


MODULE, F-TYPE, NICKEL PLA	Sec.	
ITEM NO. IC107BFCXX	REV. F	<u>PremiumProducts</u>
DWG NO. PS107BFC00	PAGE NO. 1	<u>Proven Performance</u> Competitive Prices

CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 14700 Alondra Blvd., La Mirada, CA 90638 * www.icc.com









NOTE: UNLESS OTHERWISE SPECIFIED

- 1. HOUSING:
 - A. MATERIAL: ABS, UL 94V-0 B. COLOR: XX: WH-WHITE
- 2. NICKEL PLATED F-TYPE CONNECTOR:
 - A. MATERIAL: BRONZE WITH NICKEL PLATING
 - B. HOLDING FORCE > 80 GRAMS
 - C. F-TYPE CONNECTOR THREADS: 3/8-32 UNEF-2A
- 3. ELECTRICAL:
 - A. RETURN LOSS OF -20 dB MAX
 - B. FREQUENCY RANGE 1.4 ~ 1.7 GHZ
 - C. CONTACT RESISTANCE < 10 MOHM
 - D. CHARACTER IMPEDANCE RATED 75 OHM
 - E. INSULATION RESISTANCE > 10 MOHM



MODULE, F-TYPE, NICKEL PLATED, 25 PK			TCC
ITEM NO.	IC107BFCXX	REV. F	PremiumProducts ProvenPerformance CompetitivePrices
DWG NO.	PS107BFC00	PAGE NO. 2	

 $CUSTOMER\ CARE\ /\ TECHNICAL\ SUPPORT\ *\ CSR@ICC.COM\ /\ 888-ASK-4-ICC\ (275-4422)\ *\ 14700\ Alondra\ Blvd.,\ La\ Mirada,\ CA\ 90638\ *\ www.icc.com$