
300-Pair 110 Wiring Block With Feet Kit


R O D V C T S R F C V F V C A / N O N



Package includes:

- A. 300-Pair 110 Wiring Block w/ Feet, 1 pc
- B. 4-Pair 110 Connecting Block, 60 pcs
- C. 5-Pair 110 Connecting Block, 12 pcs
- D. Label Holder, 6 pcs
- E. Designation Label, 6 pcs

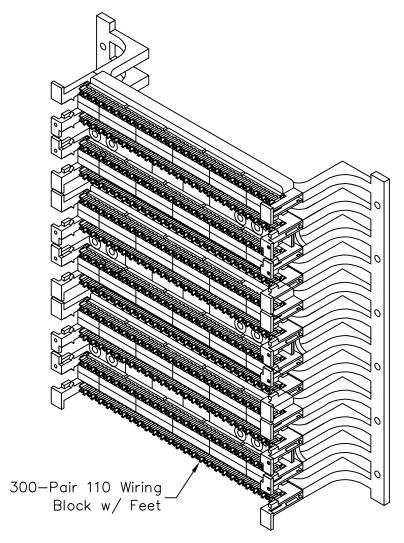




Features and Benefits:

- High density wall mounted cross connect system designed for voice and data applications
- Performance exceeds Category 5e connecting hardware requirements specified in TIA/EIA-568-B.2
- Easy system administration with designation labels and label holders
- Used with IC110 cable management blocks, ICACSPDT00 and ICACSPDT05 110 punch down tools
- UL Listed

1 10 WIR	110 WIRING BLOCK W/ FEET KIT, 300-PAIR						
ITEM NO.	IC110W3004	REV. A					
DWG NO.	PS110W3004	PAGE NO. 1					




CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 14700 Alondra Blvd., La Mirada, CA 90638 * www.icc.com

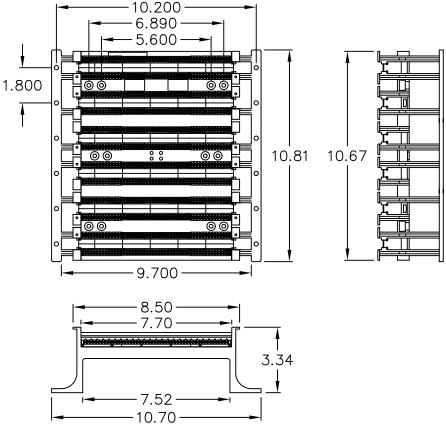

300-PAIR 110 WIRING BLOCK W/ FEET

- 1. MATERIAL: PC, UL 94V-0
- 2. COLOR: IVORY




4-PAIR 110 CONNECTING BLOCK

1 MATERIAL:

A. CONTACT: COPPER ALLOY, 100 MICRO INCHES
BRIGHT SOLDER OVER 100 MICRO

INCHES OF NICKEL UNDERPLATE

B. HOUSING: ABS, UL 94V-0



5-PAIR 110 CONNECTING BLOCK

1. MATERIAL:

A. CONTACT: COPPER ALLOY, 100 MICRO INCHES
BRIGHT SOLDER OVER 100 MICRO

INCHES OF NICKEL UNDERPLATE

B. HOUSING: ABS, UL 94V-0

CAT 5e CONNECTING HARDWARE REQUIREMENTS										
FREQUENCY (MHz)	1.0	4.0	8.0	10.0	16.0	20.0	25.0	31.25	62.5	100
NEXT LOSS (db)	65.0	65.0	64.9	63.0	58.9	57.0	55.0	53.1	47.1	43.0
FEXT LOSS (db)	75.1	63.1	57.0	55.1	51.0	49.1	47.1	45.2	39.2	35.1
RETURN LOSS (db)	35.0	35.0	35.0	35.0	35.0	34.0	32.0	30.1	24.1	20.0
INSERTION LOSS(db)	0.10	0.10	0.10	0.10	0.20	0.20	0.20	0.20	0.30	0.40



1 10 WIRING BLOCK W/ FEET KIT, 300-PAIR					
ITEM NO.	IC110W3004	REV. A			
DWG NO.	PS110W3004	PAGE NO. 2			



CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 14700 Alondra Blvd., La Mirada, CA 90638 * www.icc.com