
6P6C Surface Mount Jack

PRODUCI SPECIFICA/NON

Package includes:

- A. Surface Mount Jack Cover, 1 pc
- B. Surface Mount Jack Base, 1 pc
- C. Double Sided Adhesive Pad, 1 pc
- E. #6 x 3/4" Pan Head, Sharp Point Tapping Screw, 2 pcs

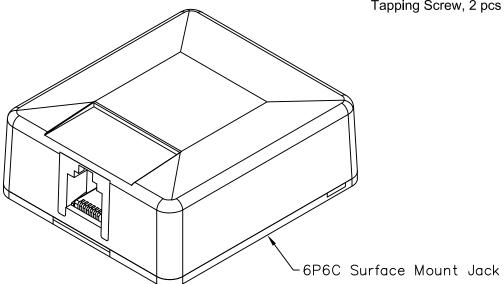


Features and Benefits:

- Provides a clean modular surface mount outlet solution for voice connectivity applications
- Designed to support a multitude of high tech communication needs for residential or commercial applications
- Provided with traditional screw down terminals
- Multiple mounting options including adhesive backing and screws
- Rugged and durable construction
- Available in ivory and white
- UL listed

SURFACE MOUNT JACK, 6P6C				
ITEM NO.	IC625SB6XX	REV.	A	
DWG NO.	PS625SB600	PAGE NO). 1	




CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 14700 Alondra Blvd., La Mirada, CA 90638 * www.icc.com





POSITION	WIRE COLOR		
1	WHITE		
2	BLACK		
3	RED		
4	GREEN		
5	YELLOW		
6	BLUE		

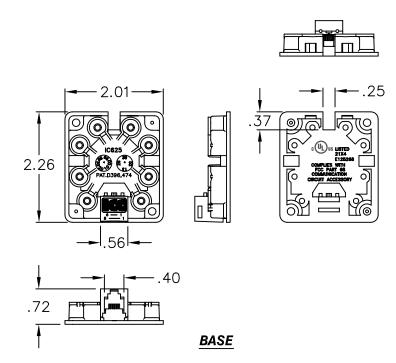

NOTE: UNLESS OTHERWISE SPECIFIED

- 1. MATERIAL: 3. MECHANICAL:
 - A. SURFACE MOUNT JACK HOUSING: ABS, UL94V-0 A. TOTAL MATING FORCE: 750 GRAMS
 - B. SPRING WIRE CONTACTS: PHOSPHOR BRONZE GOLD PLATING B. RETENTION: 17 LBS BETWEEN JACK AND PLUG
 - OVER 100 MICRO INCH NICKEL C. CRIMP TENSILE STRENGTH: 4.0-500 LBS
 - C. GOLD PLATING: 1.27 MICRON/50 MICRO INCH MIN 4. ELECTRICAL:
 - D. WIRE LEADS: 26 AWG STRANDED WIRE A. CURRENT RATING: 1.5 AMP MAX
 - E. TERMINATION SCREWS: 15 LBS/INCH MIN TORQUE B. DIELECTRIC WITHSTANDING VOLTAGE: 1,000 VOLTS RMS, 60 HZ
 - ZINC CHROMATIC PLATED STEEL C. CONTACT RESISTANCE < 20 MILLIOHMS
 - F. TERMINAL LUGS: BRASS D. INSULATION RESIS
- D. INSULATION RESISTANCE > 10 MEGAOHMS
- 2. COLOR: XX: IV-IVORY & WH-WHITE



	NT JACK, 6P6C			
	ITEM NO.	IC625SB6XX	REV. A	
	DWG NO.	PS625SB600	PAGE NO. 2	



CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 14700 Alondra Blvd., La Mirada, CA 90638 * www.icc.com