


Category 5e Molded Boot Patch Cord

PRODUCT SPECIFICATION

Package includes:

A. CAT 5e Molded Boot Patch Cord, 1 pc

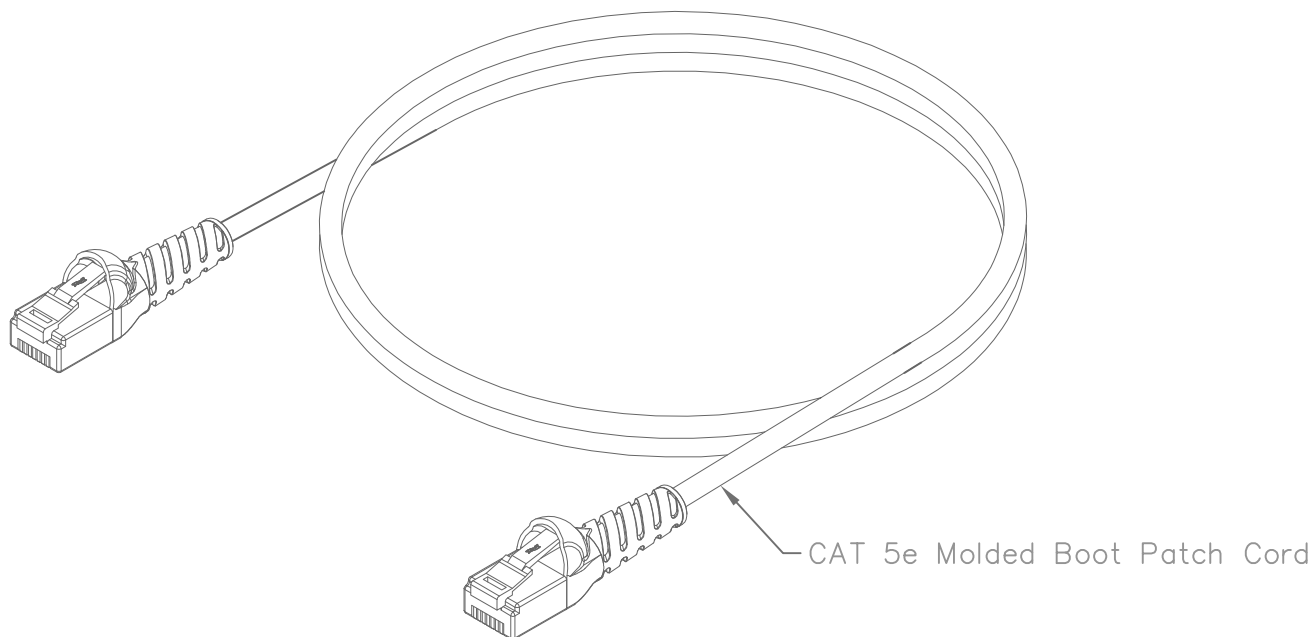

Features and Benefits:

- 100 % Factory Tested , 50 Micro Inch Gold plated contacts .
- Component Rated and exceeds ANSI/TIA-568 connecting hardware requirements .
- Ultra Slim Low Profile boots for high density applications, no width wasted on boot.
- Backwards compatible to all lower rated category components.
- Constructed with Ultra Flexible, EZ release, Snag Free Molded Strain relief .
- Stranded 24 AWG copper wire (No substandard tinned copper materials used) .
- Safety: UL listed with 94V-0 rated plugs, CSA, CMG, FT4 Flame rated.
- Available in 8 colors (Blue, Black, Green, Gray, Orange, Red, White, Yellow) .
- Available in 7 lengths (1, 3, 5, 7, 10, 14, 25 ft) .

PATCH CORD, CAT 5E, MOLDED BOOT

ITEM NO.

SEE DETAIL ON PAGE 2

REV. C


DWG NO.

PSPCSJ0000

PAGE NO. 1



CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 14700 Alondra Blvd., La Mirada, CA 90638 * www.icc.com

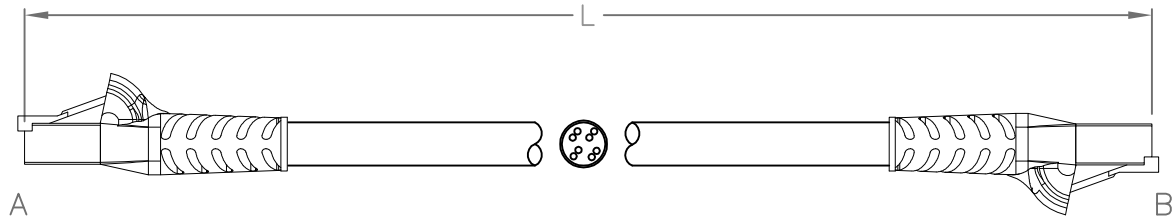

WIRING DIAGRAM		
PLUG A	PLUG B	COLOR
1	1	WHITE/ORANGE
2	2	*ORANGE
3	3	WHITE/GREEN
4	4	*BLUE
5	5	WHITE/BLUE
6	6	*GREEN
7	7	WHITE/BROWN
8	8	*BROWN

* A WHITE MARKING IS OPTIONAL

ITEM NO.	L(FT)	TOLERANCE(IN)
ICPCSJ01XX	1	+1.5 -0
ICPCSJ03XX	3	+1.5 -0
ICPCSJ05XX	5	+2 -0
ICPCSJ07XX	7	+2 -0
ICPCSJ10XX	10	+3 -0
ICPCSJ14XX	14	+3 -0
ICPCSJ25XX	25	+4 -0

NOTE: UNLESS OTHERWISE SPECIFIED

1. ELECTRICAL/PHYSICAL:

A. CABLE:

TEMPERATURE RATING, MAX 75°C
 WT./M/ NOM, NET 20.0 LBS
 CAPACITANCE, MUTUAL 17.1 PF/FT AT 1 MHZ
 DIELECTRIC WITHSTANDS, MIN 1000V RMS
 VOLTAGE RATING, MAX 30V
 D.C. RESISTANCE, MAX 28.6 OHMS
 IMPEDANCE, CHARACTERISTIC, NOM 100.0 OHMS +/-15 @ 1 MHZ TO 100 MHZ

B. MODULAR PLUG:

UL APPLICATIONS: 250 VOLTS MAX, AT 2 AMPS
 RESISTANCE OF INSULATION: 500 MEGOHMS
 RESISTANCE OF TERMINATION: 35 MILLIOHMS MAX AFTER 20°C
 DIELECTRIC WITHSTANDING VOLTAGE: 500 VOLTS AC

2. MATERIAL & FINISH:

A. CABLE: CAT 5e PATCH CABLE

B. JACKET: MATERIAL: PVC

OVERALL DIAMETER: 0.204" +/-0.008"
 AVERAGE THICKNESS: 0.020"
 INSULATION: MATERIAL: HIGH DENSITY POLYETHYLENE
 OVERALL DIAMETER: 0.038"
 AVERAGE THICKNESS: 0.007"
 TYPE CMG FT4

CONDUCTOR: 24 AWG (7X32) UL RATED, BARE COPPER WIRE, STRANDED
 PERFORMANCE RATING: CATEGORY 5e

C. MODULAR PLUG: UL AND cUL RECOGNIZED

HOUSING: POLYCARBONATE, UL94V-0
 COLOR: NATURAL
 CONTACT: COPPER ALLOY
 GOLD PLATING: 1.27 MICRONS/50µ MIN ON CONTACTS
 MARKING: ICC LABEL ON RELEASE TAB
 NUMBER OF CONTACTS: 8
 PERFORMANCE RATING: CATEGORY 5e

3. STRAIN RELIEF:

A. MATERIAL: 70P PVC, UL94V-0

4. MECHANICAL:

A. CABLE-TO-PLUG TENSILE STRENGTH: 20 LBS [89N] MIN
 B. DURABILITY: 200 MATING CYCLES MIN

5. COLORS: XX: BL-BLUE, BK-BLACK, GN-GREEN, GY-GRAY, OR-ORANGE, RD-RED, WH-WHITE, YL-YELLOW

CATEGORY 5e CHANNEL REQUIREMENTS										
FREQUENCY (MHz)	1.0	4.0	8.0	10.0	16.0	20.0	25.0	31.25	62.5	100.0
NEXT LOSS (db)	60.0	53.5	48.6	47.0	43.6	42.0	40.3	38.7	33.6	30.1
PSNEXT LOSS (db)	57.0	50.5	45.6	44.0	40.6	39.0	37.3	35.7	30.6	27.1
PSELFEXT LOSS (db)	54.4	42.4	36.3	34.4	30.3	28.4	26.4	24.5	18.5	14.4
ELFEXT LOSS (db)	57.4	45.4	39.3	37.4	33.3	31.4	29.4	27.5	21.5	17.4
RETURN LOSS (db)	17.0	17.0	17.0	17.0	17.0	17.0	16.0	15.1	12.1	10.0
INSERTION LOSS (db)	2.2	4.5	6.3	7.1	9.1	10.2	11.4	12.9	18.6	24.0

UL US FILE NO. 125268

PATCH CORD, CAT 5E, MOLDED BOOT

ITEM NO. SEE DETAIL ABOVE

REV. C

DWG NO. PSPCSJ0000

PAGE NO. 2



CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 14700 Alondra Blvd., La Mirada, CA 90638 * www.icc.com