

# INSTALLATION INSTRUCTIONS

## 1406/1426 24VDC POWER SUPPLY MODULE

### MODEL 1406/1426-PSM-24VDC

The 1406/1426-PSM-24VDC Power Supply Module converts device output voltage from ACSI Series 1406 or 1426 power supplies to a filtered, regulated 24VDC output for use with ACSI Series 1550-MD Motor Drive Electric Latch Retraction Exit Devices. Up to two devices can be connected to the module's regulated output.

#### Installing the Module

The power supply module can simply be placed inside the enclosure on the bottom side at the locations shown in Figures 1 and 2. Vent holes must face upward, as indicated in Figure 1, to allow for maximum heat dissipation.

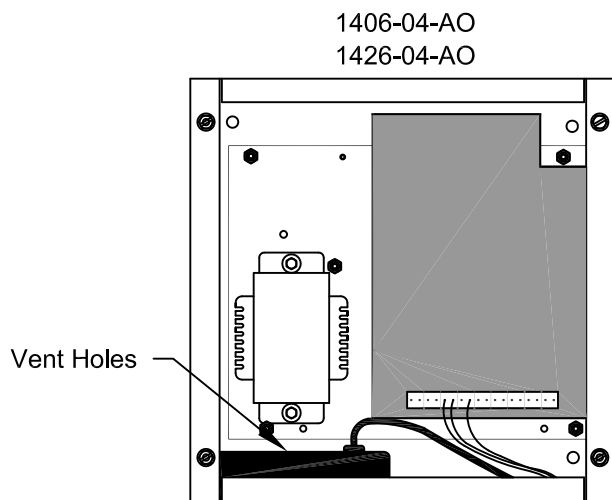


Fig. 1


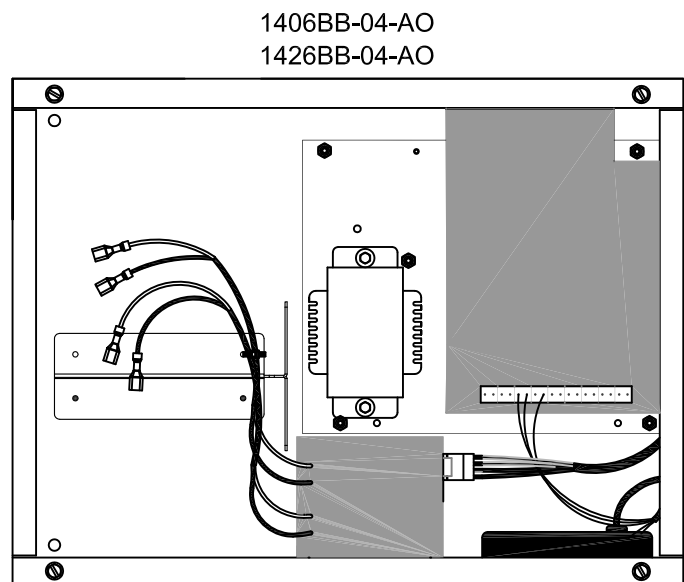


Fig. 2

### Wire Diagram

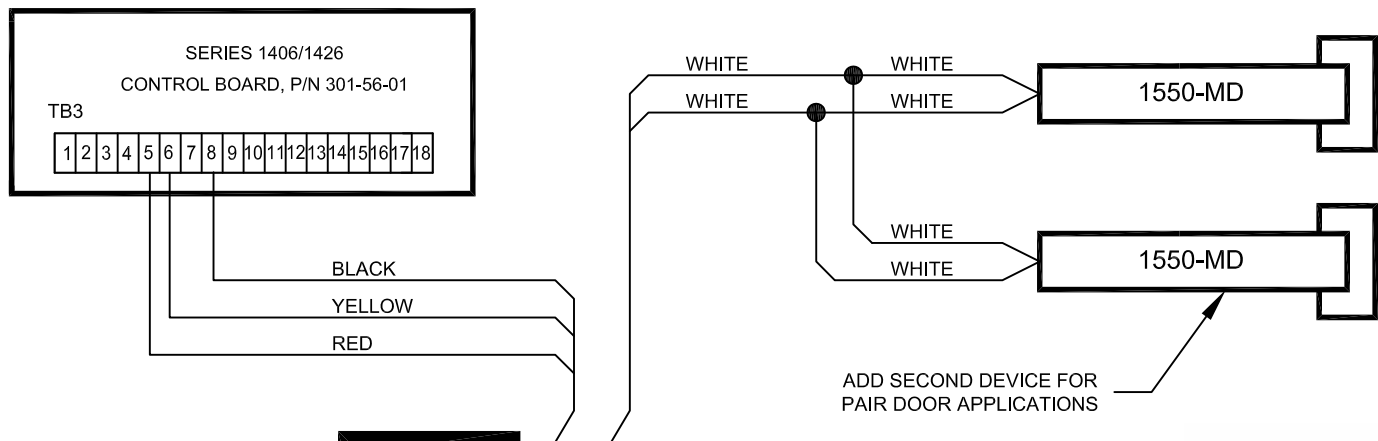

**MODULE DIMENSIONS:**  
4.55"L x 3.29"W x 1.25"H

**DEVICE OUTPUT VOLTAGE:**  
25.5VDC (UNLOADED)

**NOTE:**  
DEVICE OUTPUT CONTAINS SHORT CIRCUIT,  
THERMAL, AND CURRENT LIMITING PROTECTION

