

# II-M1500-24

FOR USE WITH M1500  
MORTISE LOCKS WITH KEY CYLINDER (KM) MONITORING


## KM - KEY CYLINDER MONITORING

KEY CYLINDER MONITORING IS A SPDT SWITCH MOUNTED INSIDE THE LOCKSET.  
KM SWITCH MONITORS THE USE OF THE KEY CYLINDER LATCH RETRACTION FUNCTION OF LOCKSET.

## ELECTRICAL SPECIFICATIONS

SPDT MECHANICAL SWITCH	
<u>VOLTAGE</u>	<u>CURRENT</u>
125 VAC	3 AMP
30 VDC	2 AMP

NOTE: MAINLY USED AS A DRY CONTACT MONITORING SWITCH

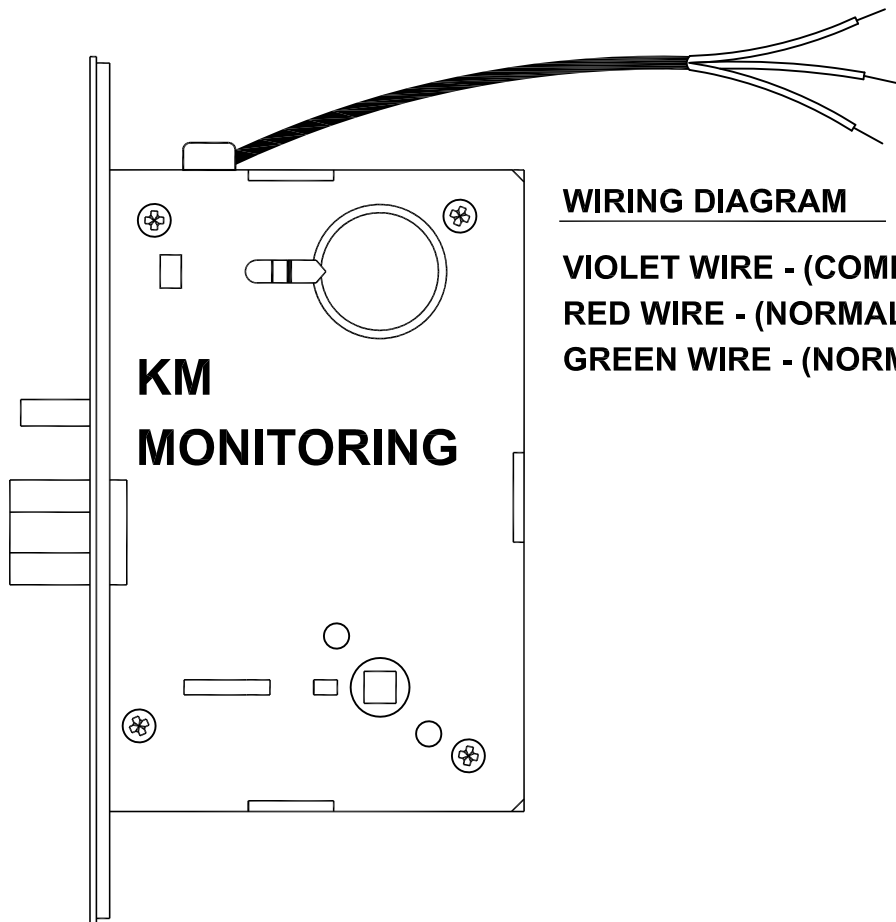

## WIRING DIAGRAM

VIOLET WIRE - (COMMON)  
RED WIRE - (NORMALLY OPEN)  
GREEN WIRE - (NORMALLY CLOSED)

