


# MODEL KR-1

## KEY RESET EMERGENCY STATION

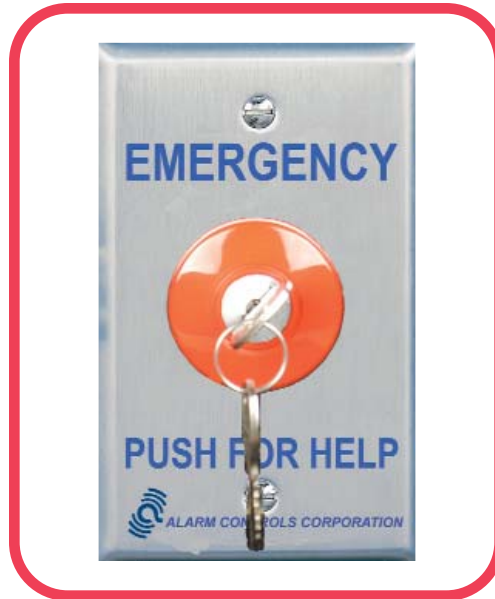

### SPECIFICATIONS

- KEY REQUIRED TO RESTORE SWITCH TO NORMAL CONDITION
- KEYSWITCH RATED TO IP40 STANDARD
- RED 1.5 INCH DIAMETER MUSHROOM BUTTON WITH TWO KEYS
- GUARD RING IS AVAILABLE TO PROTECT MUSHROOM BUTTON
- SILKSCREENED “*EMERGENCY PUSH FOR HELP*”
- ONE NORMALLY-OPEN AND ONE NORMALLY-CLOSED CONTACT
- CONTACTS RATED 10 A. @ 35 VDC OR 120 VAC
- SCREW TERMINALS ON CONTACT BLOCKS
- MOUNTED ON SINGLE GANG STAINLESS STEEL WALLPLATE
- PLATE SIZE 2.75” W x 4.5” H
- DEPTH BEHIND PLATE IS TWO INCHES
- U.L. AND C.S.A. CERTIFIED COMPONENTS



**ALARM CONTROLS CORPORATION**

19 BRANDYWINE DRIVE P.O. BOX 280

DEER PARK, NY 11729

1 631 586-4220 1 800 645-5538

WWW.ALARMCONTROLS.COM EMAIL INFO@ALARMCONTROLS.COM

# PUSHBUTTON CONTROL STATIONS

## FOR EMERGENCY / PANIC / DURESS

### MODEL SWITCH TYPE

PBM MOMENTARY

PBL LATCHING

KR LATCHING, KEY RESET

### OPTIONS

ILLUMINATED OPERATOR, GUARD RING  
LAMP VOLTAGES: 6, 12, 24 VDC OR 120 VAC

ILLUMINATED OPERATOR, GUARD RING  
LAMP VOLTAGES: 6, 12, 24 VDC OR 120 VAC

GUARD RING (ILLUMINATION N/A)

### ADDITIONAL OPTIONS

CUSTOM SILKSCREENING  
ANY COMBINATION OF SWITCHES  
A VARIETY OF PLATE FINISHES  
1.75" SLIMLINE PLATE  
MULTIPLE GANG PLATES

### ACCESSORIES

SURFACE MOUNT BOX W/ TAMPER SWITCHES  
(MODEL SMB-1)  
WALLPLATE RETAINER  
(MODEL WPR)  
TIMER TO EXTEND CONTACT "ON" TIME  
(MODEL MT-1)  
HINGED COVER WITH HASP  
(MODEL HC)



REAR VIEW OF SWITCH

### SPECIFICATIONS

CONTACT RATING: 10 @ 35 VDC OR  
120 VAC  
TEMP RANGE: -25C TO 70C  
SWITCH DEPTH: 2" STANDARD,  
2.5" ILLUMINATED

## HOW TO ORDER

SELECT TYPE OF MODEL AND CONTACT ARRANGEMENT FROM CHART BELOW  
(UNLESS OTHERWISE SPECIFICIED ALL MODELS ARE MOUNTED ON 430 SERIES STAINLESS STEEL PLATES)

### STANDARD MODELS

### OPTIONS

MODEL	CONTACTS	PLATE	ILLUMINATION	GUARD RING
XXX	X	X	XX	XX
PBM	1 - N/O, NC	1 - 302 S.S.	L1 - 6 VDC	GR
PBL	2 - N/O, N/O	2 - WHITE	L2 - 12 VDC	
KR	3 - N/C, N/C	3 - IVORY	L3 - 24 VDC	
	4 - N/C	4 - RED	L4 - 120 VAC	
	5 - N/O	5 - 1.75" S.S.		
		6 - 1.75" RED		

**EXAMPLE: PBL-1- 4-L2- GR** LATCHING PUSHBUTTON WITH ONE N/O AND ONE N/C CONTACT, RED PLATE, 12VDC ILLUMINATION, GUARD RING

# ALARM CONTROLS CORPORATION

"QUALITY SECURITY EQUIPMENT SINCE 1971"

19 BRANDYWINE DRIVE, P.O. BOX 280, DEER PARK, NEW YORK 11729

1 800 645-5538 631 586-4220 FAX 631 586-6500

EMAIL: [INFO@ALARMCONTROLS.COM](mailto:INFO@ALARMCONTROLS.COM) [WWW.ALARMCONTROLS.COM](http://WWW.ALARMCONTROLS.COM)