



PRODUCT FEATURES

- Bracket mounting provides the easiest install for out-swing doors
- Innovative install templating for an effortlessly accurate alignment between magnet and armature plate
- Sleek, low profile and refined lines for improved aesthetics
- LED visual locked status with configurable red/green color output
- BondSTAT lock bond sensor - Patented
- Integrated door position switch
- Autosensing dual voltage with microprocessor technology
- Adjustable automatic relock timer (0 to 30 seconds)
- Wire chamber anti-tamper switch
- Efficient, low power usage
- Size optimized for use with door closers
- MagnaCare Lifetime Replacement No Fault Warranty

SPECIFICATIONS

- UL 1034 Burglary- Resistant Listed
- UL 10C Listed
- CAN4-S104, CAN/ULC Listed
- UL 294 Recognized Component

- ANSI/BHMA A156.23, Grade 1; E18501-1000
- CSFM- California State Fire Marshal Listed
- Patents: D682,655; D690,576; 8,094,017
- Patents Pending

Holding Force:
1100lbs [499 kg]

Dimensions:
M680BD Magnalock: 11-1/2"L x 2-9/16"D x 2-1/2"H
Strike: 10-7/8"L x 9/16"D x 2"H

Electrical:
550mA (± 10%) at 12VDC
300mA (± 10%) at 24VDC

Operating Temperature:
+32 to +110F [0 to +43C]
Indoor use only

Shipping Weight:
13lbs [5.44kg]

Finishes:
US28/628 - Satin Aluminum
Clear (Standard)


US20A/313 - Satin Brown

335 - Satin Black

US03/605 - Polished Brass

US04/606 - Satin Brass

US10/612 - Satin Bronze

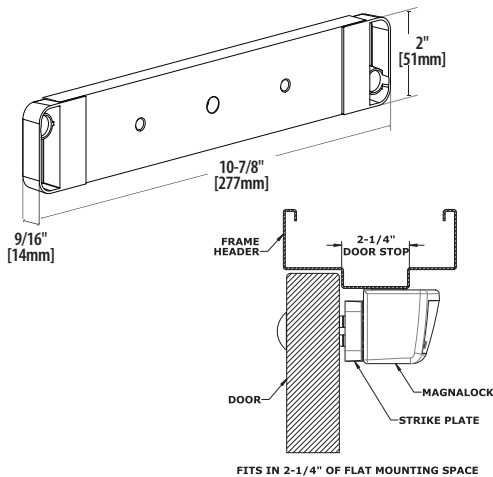

M680 SERIES

1100lbs Holding Force

The Smart, Stylish and Secure Magnalock®

The M680 from Securitron delivers unsurpassed intelligence, style and convenience.

Intelligence. A built-in, smart voltage sensing microprocessor controls Securitron's patented BondSTAT and door position status monitoring.

Style. The aesthetics of the M680 are refined enough for the most discriminating designer openings.

Convenience. An integrated camera option provides a unique perspective for discreet surveillance and clear facial views.

Use the integrated motion sensor exit device alone, or with the camera for advanced access control.


Easy installation. The fastest, easiest, most secure installation of any bracket-mount maglock.

MODELS

PART # | Description

M680BD	M680 Standard Magnalock (w/BondSTAT, DPS) in Satin Aluminum
M680BD-313	M680 Standard Magnalock, Satin Brown
M680BD-335	M680 Standard Magnalock, Satin Black
M680BD-605	M680 Standard Magnalock, Polished Brass
M680BD-606	M680 Standard Magnalock, Satin Brass
M680BD-612	M680 Standard Magnalock, Satin Bronze

For bracket options, see page 34.

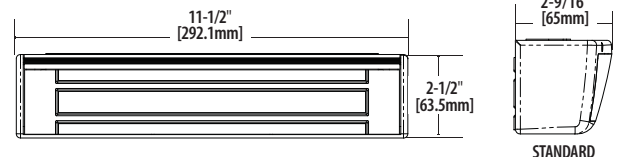

DUAL VOLTAGE



GRADE 1



FIRE RATED

SECURITRON®

ASSA ABLOY

M680BDC and Options

The Smart, Stylish and Secure Magnalock®
with Integrated Video Surveillance Camera



PRODUCT FEATURES AND SPECIFICATIONS:

- All M680 features and standards from page 14

SPECIAL PRODUCT FEATURES:

- Analog black/white CCTV camera
 - › 112 degree view angle
 - › 420 TV line resolution
 - › 48db S/N ratio
- Analog color CCTV camera
 - › 112 degree view angle
 - › 420 TV line resolution
 - › 48db S/N ratio
 - › 0.1 LUX minimum illumination day/night operation
 - › Supports BNC connection

OPTIONAL FEATURES:

- Analog color CCTV camera
 - › 112 degree view angle
 - › 520 TV line resolution
 - › 48db S/N ratio
 - › 1.5 LUX minimum illumination day/night operation
 - › Supports BNC connection

Dimensions:

M680BDC Magnalock:

11-1/2" L x 3-1/8" D x 2-1/2" H

Strike:

10-7/8" L x 9/16" D x 2" H

Electrical:

Magnalock Power

550mA (± 10%) at 12VDC



300mA (± 10%) at 24VDC

Camera Power*

200mA (± 10%) at 12VDC

80mA (± 10%) at 24VDC

* A separate continuous power input is required to power the camera

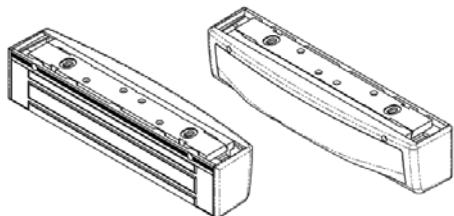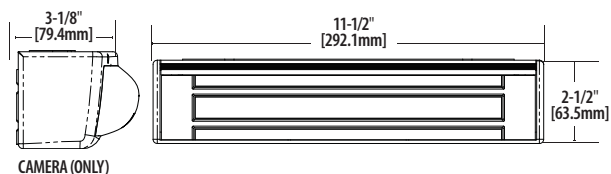

MODELS

PART # | Description

Magnalock model M680 with B&W camera

M680BDC	M680 w/ BW Camera Plus Standard Features, Satin Aluminum
M680BDC-313	M680 w/ BW Camera, Satin Brown
M680BDC-335	M680 w/ BW Camera, Satin Black
M680BDC-605	M680 w/ BW Camera, Polished Brass
M680BDC-606	M680 w/ BW Camera, Satin Brass
M680BDC-612	M680 w/ BW Camera, Satin Bronze

Magnalock model M680 with color camera


M680BDC2	M680 w/ Color Camera Plus Standard Features, Satin Aluminum
M680BDC2-313	M680 w/ Color Camera, Satin Brown
M680BDC2-335	M680 w/ Color Camera, Satin Black
M680BDC2-605	M680 w/ Color Camera, Polished Brass
M680BDC2-606	M680 w/ Color Camera, Satin Brass
M680BDC2-612	M680 w/ Color Camera, Satin Bronze



Embedded CCTV captures full facial view of persons exiting door



As viewed from the Security Video Screen

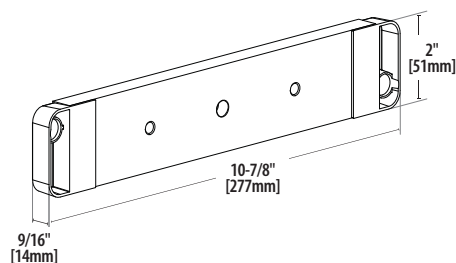

DUAL VOLTAGE



GRADE 1



FIRE RATED

SECURITRON®
ASSA ABLOY



PRODUCT FEATURES AND SPECIFICATIONS:

- All M680 features and standards from page 14

SPECIAL PRODUCT FEATURES:

- Adjustable passive infrared (PIR) Request to Exit
 - Automatically cuts power to the M680 for egress
 - Request to exit (REX) output
 - Easily adjustable beam pattern
 - Adjustable relock timer

Dimensions:

M680BDX Magnalock:
11-1/2"L x 3-1/8"D x 2-1/2"H
Strike:
10-7/8"L x 9/16"D x 2"H



Electrical:

Magnalock Power
550mA (± 10%) at 12VDC
300mA (± 10%) at 24VDC

REX Power*

25mA (± 10%) at 12VDC
10mA (± 10%) at 24VDC

*A separate continuous power input is required to power the REX

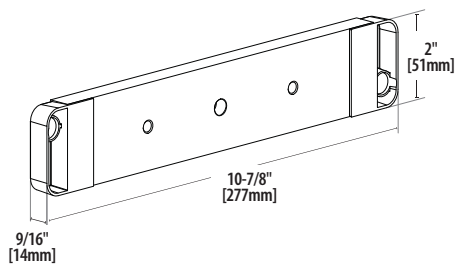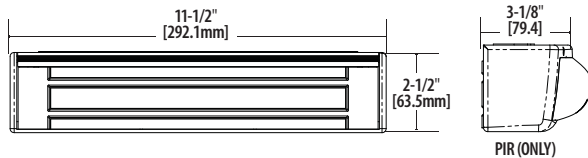

M680BDX

The Smart, Stylish and Secure Magnalock® with Integrated Adjustable Passive Infrared Request to Exit

The M680BDX with Integrated Request to Exit provides optimum coverage for detecting an approaching person so the door unlocks for egress. The configurability of the passive infrared beam allows the detection area to be tailored to your environment, for better accuracy.


MODELS

PART # | Description


Magnalock model M680 with REX

Model	Description
M680BDX	M680 w/ REX in Satin Aluminum
M680BDX-313	M680 w/ REX, Satin Brown
M680BDX-335	M680 w/ REX, Satin Black
M680BDX-605	M680 w/ REX, Polished Brass
M680BDX-606	M680 w/ REX, Satin Brass
M680BDX-612	M680 w/ REX, Satin Bronze



Safety Note: Securitron recommends an emergency exit button be used in conjunction with the M680BDX to meet applicable building and life safety codes.



REX shown adjusted for hallways

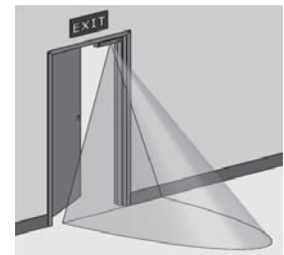

REX shown adjusted for door approach



DUAL VOLTAGE



GRADE 1



FIRE RATED

SECURITRON®

ASSA ABLOY



LISTED



PRODUCT FEATURES AND SPECIFICATIONS:

- All M680 features and standards from page 14

SPECIAL PRODUCT FEATURES:

- Analog black/white CCTV camera
 - 112 degree view angle
 - 420 TV line resolution
 - 48db S/N ratio
- Adjustable passive infrared (PIR) Request to Exit
 - Automatically cuts power to the M680 for egress
 - Request to exit (REX) output
 - Easily adjustable beam pattern
 - Adjustable relock timer

OPTIONAL FEATURES:

- Analog color CCTV camera
 - 112 degree view angle
 - 520 TV line resolution
 - 48db S/N ratio
- 1.5 LUX minimum illumination day/night operation
- Supports BNC connection

Dimensions:


M680BDCX Magnalock:
11-1/2" L x 3-1/8" D x 2-1/2" H
Strike: 10-7/8" L x 9/16" D x 2" H

Electrical:


Magnalock Power
550mA (± 10%) at 12VDC
300mA (± 10%) at 24VDC

Camera and REX Power*
225mA (± 10%) at 12VDC
90mA (± 10%) at 24VDC

* A separate continuous power input is required to power the camera and REX

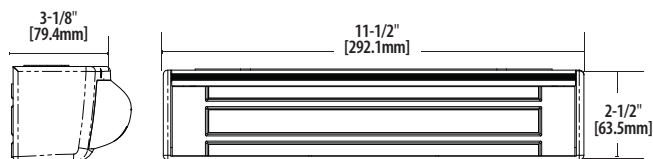

PIR + CAMERA

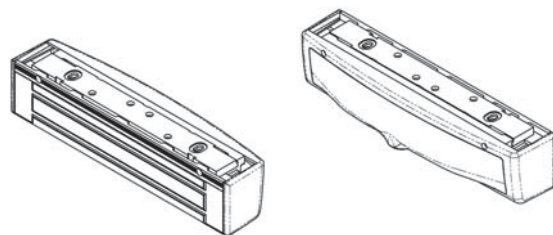

M680BDCX

The Smart, Stylish and Secure Magnalock® with Integrated Video Surveillance Camera and Passive Infrared Request to Exit

MODELS

PART # | Description

Magnalock model M680 with B&W camera and REX

M680BDCX	M680 w/ REX and BW Camera, Satin Aluminum
M680BDCX-313	M680 w/ REX and BW Camera, Satin Brown
M680BDCX-335	M680 w/ REX and BW Camera, Satin Black
M680BDCX-605	M680 w/ REX and BW Camera, Polished Brass
M680BDCX-606	M680 w/ REX and BW Camera, Satin Brass
M680BDCX-612	M680 w/ REX and BW Camera, Satin Bronze

Magnalock model M680 with color camera and REX

M680BDC2X	M680 w/ REX and Color Camera, Satin Aluminum
M680BDC2X-313	M680 w/ REX and Color Camera, Satin Brown
M680BDC2X-335	M680 w/ REX and Color Camera, Satin Black
M680BDC2X-605	M680 w/ REX and Color Camera, Polished Brass
M680BDC2X-606	M680 w/ REX and Color Camera, Satin Brass
M680BDC2X-612	M680 w/ REX and Color Camera, Satin Bronze


Safety Note: Securitron recommends an emergency exit button be used in conjunction with the M680BDCX to meet applicable building and life safety codes.



Integrated Video Surveillance Camera



Integrated Adjustable REX

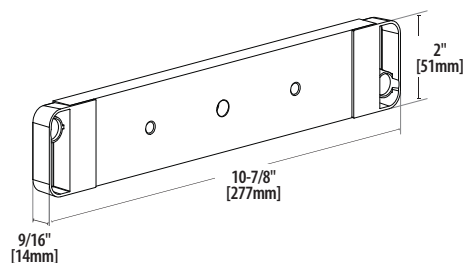

DUAL VOLTAGE



GRADE 1



FIRE RATED

SECURITRON®

ASSA ABLOY