




DTK-MT25PSCP

RJ21X Mass Termination Surge Protection General Product Specifications

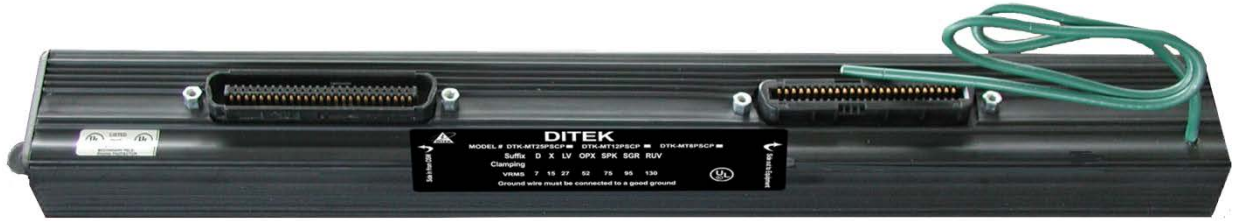

The DITEK MT25PSCP blends state-of-the-art surge protection with the convenience of “21X” termination making it the perfect choice for large telephone systems and building-to-building wire runs. Automatic reset fusing helps to reduce service calls resulting from nuisance fuse blows, and the slim line design makes it easy and practical to mount the surge protector next to the 66 block or incoming line.

DTK-MT25PSCP

Product Features

- Provides over voltage protection and self-resetting fusing
- Multiple wiring configurations allow same model to meet numerous applications
- RJ21X connections offer simple and quick termination
- Available in 30V and 130V configurations
- Small footprint utilizes minimum wall or rack space
- Ten Year Limited Warranty

Specifications

- **Agency Approvals:** UL497A
- **Connection Method:** RJ21X (Male-IN Female-OUT)
- **Continuous Current:** 0.150 Amps
- **Protection Modes:** Tip-G, Ring-G (all)
- **Dimensions:** 1.15”H x 14.88” W x 1.83”D
(29mm x 378mm x 46mm)
- **Weight:** .56 pounds (.25kg)
- **Housing:** ABS

	LV	RUV
Service Voltage	30V	130V
MCOV	38VDC	175VDC
Typical Let-Through Voltage	42-52	184-224
Surge Current Per Pair	1000A	5000A

